

\*\*\*\*\*  
 ABLOCDJDUWESTIU UF UD  
 MR MKS DAVID R BLOCK  
 APT H 72U  
 300 WESTERN AVE  
 LANSING MI 48917

# THE ADC CARTRIDGE CAUSES NO PERCEIVABLE WEAR OVER THE LIFE OF YOUR RECORDS.

MKII is different, because our engineers found a way to detach the magnet and reposition it above the stylus, so the stylus applies less pressure against the groove.

Less pressure means less wear.

The fact is, of all the leading brands, ADC cartridges have the lowest mass moving system you can buy. That means better sound and superior performance.

The XLM frequency response is exceptionally flat, from 15Hz to 24KHz  $\pm 1.5$ dB. And for the ultimate in stereo reproduction, it has a minimum of 28dB of channel separation.

Think about it. In the long run you'll probably spend more on your record collection than you will on your whole stereo system. So it makes sense to buy a cartridge with proof that it makes your records sound better and live longer.

# THE ADC LOW MASS CARTRIDGE.

IT HELPS YOUR RECORDS LIVE LONGER.

Unbelievable? Believe it. A series of tests conducted by a leading independent audio-testing laboratory prove it. The tests show that the ADC XLM-MKII cartridge causes no perceivable wear until after 60 plays. Industry sources estimate the "life of a record" (the average number of times a record is played) to be 40 to 50 plays.


Other cartridge manufacturers may talk about less record wear, but ADC has proven *no wear over the life of your record.*

The reason for this is our unique patented design. It's patent #3294405.

We call it the "induced magnet" cartridge.

Most cartridges are designed so that a heavy magnet is part of the moving system.

The ADC XLM-



The ADC low mass cartridge. Unbelievable.




A BSR COMPANY

ADC Phono Cartridge


A Division of

BSR Consumer Products Group  
Rte. 303, Blauvelt, N.Y. 10913

## THE PROOF:

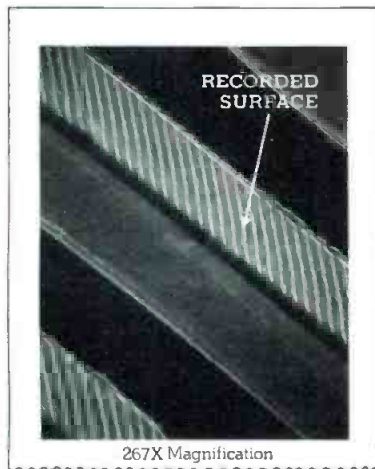

This is a photomicrograph of a 20kHz record groove that has never been played before.

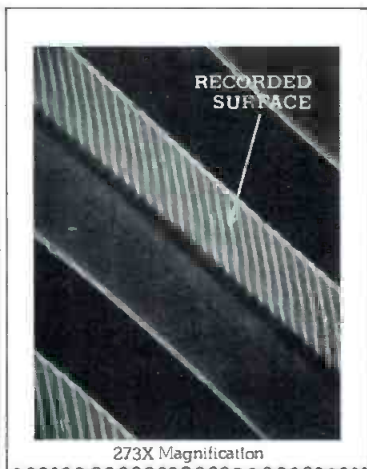


This is a photomicrograph of a similar 20kHz record groove played 75 times with an ADC XLM-MKII cartridge. As you can see there is no difference.

If you'd like your own personal copy of the test result, write to ADC at address shown above.

Circle 10 on Reader Service Card

## THE DIFFERENCE:

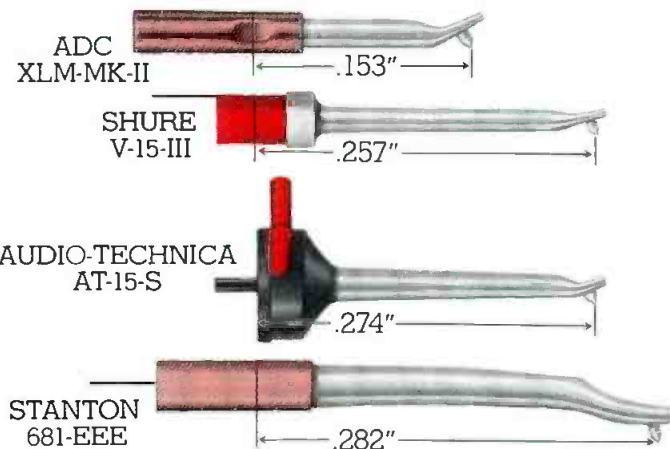

The way to get the most accurate reproduction of sound is to lower the total effective mass of the moving parts of the stylus. And that's exactly what

our engineers did. In fact, of all the leading brands, ADC cartridges have the lowest mass moving system you can buy.

INDUCED MAGNET

MAGNET



## coming next month

- A Headset Communications System that can be used in concerts, recording sessions and the theater has been contributed by Peter D. Hiscocks.
- The knotty problem of establishing uniform acoustics in the control room is tackled by Michael Rettinger. His article is entitled appropriately Control Room Acoustics.
- Garry Margolis has written an article that offers specific instructions for Audio Transducer Power Handling.
- Coming in *db*. The Sound Engineering Magazine.



## about the cover

- The printed circuit plug-in card is a basic building block of audio systems.

# db

THE SOUND ENGINEERING MAGAZINE

MARCH 1977 VOLUME 11, NUMBER 3

26	SOLVING THE REVERBERATION DILEMMA William H. Hall
29	db TEST REPORT: SOUND TECH. 1710A ANALYZER
32	A SIMPLE UTILITY OSCILLATOR Evert Fruitman
4	CALENDAR
6	BROADCAST SOUND Patrick S. Finnegan
14	THEORY AND PRACTICE Norman H. Crowhurst
20	THE SYNC TRACK John M. Woram
22	NEW PRODUCTS AND SERVICES
33	FREE LITERATURE
37	CLASSIFIED
40	PEOPLE. PLACES, HAPPENINGS

*db* is listed in Current Contents: Engineering and Technology

**Larry Zide**      **John M. Woram**  
EDITOR-PUBLISHER      ASSOCIATE EDITOR

**Bob Laurie**      **Hazel Krantz**  
ART DIRECTOR      COPY EDITOR

**Eloise Beach**      **Lydia Anderson**  
CIRCULATION MANAGER      BOOK SALES

**Ann Russell**      **Crescent Art Service**  
ADVERTISING PRODUCTION      GRAPHICS AND LAYOUT

*db*, the Sound Engineering Magazine is published monthly by Sagamore Publishing Company, Inc. Entire contents copyright © 1977 by Sagamore Publishing Co., Inc., 1120 Old Country Road, Plainview, L.I., N.Y. 11803. Telephone (516) 433 6530. *db* is published for those individuals and firms in professional audio-recording, broadcast, audio-visual, sound reinforcement, consultants, video recording, film sound, etc. Application should be made on the subscription form in the rear of each issue. Subscriptions are \$7.00 per year (\$14.00 per year outside U. S. Possessions, Canada, and Mexico) in U. S. funds. Single copies are \$1.00 each. Controlled Circulation postage paid at Harrisburg, Pa. 17105. Editorial, Publishing, and Sales Offices: 1120 Old Country Road, Plainview, New York 11803. Postmaster: Form 3579 should be sent to above address.

# dbx your Dolby "A" and eliminate *ALL* the hiss



## with the new dbx K9-22 card noise reduction system

It's a direct plug-in replacement for the Dolby "A" CAT-22 card. It interchanges instantly with no adjustments. It gives you the flexibility to use both dbx and Dolby "A" formats with your existing Dolby main frame. It provides more than 30dB noise reduction and 10dB extra headroom. It eliminates the hiss which remains with Dolby "A". It gives greater than 100dB dynamic range. It requires no level match tones. It's affordable. It costs only \$250 per channel, or less than half the cost of a free standing noise reduction system. It can go wherever you go in its optional Halliburton travel case. It's the new world standard in noise reduction. It's available now from your dbx dealer whose name we'll supply along with complete product information when you circle reader service number or contact:

Dolby is a trade mark of Dolby Laboratories.

**dbx** dbx, Incorporated  
296 Newton Street  
Waltham, Massachusetts 02154  
(617) 899-8090

Circle 28 on Reader Service Card

### index of advertisers

Audio-Technica, U.S. . . . .	18
B&K Instruments . . . . .	32
BSR . . . . .	Cover 2
Cetec Audio . . . . .	31
Community Light & Sound . . . . .	9
dbx, Inc. . . . .	2
Electro-Voice . . . . .	6
ESE . . . . .	30
Garner Industries . . . . .	34, 35
Hammond Industries . . . . .	33
Industrial Research Products . . . . .	4
Jensen Tools . . . . .	24
JBL . . . . .	11
Leader Instruments . . . . .	20
The London Company . . . . .	15
Micmix Audio . . . . .	23
Orban/Parasound . . . . .	15
Otari . . . . .	7, Cover 4
Recording Supply Co. . . . .	25
SAE . . . . .	10
Shure Brothers . . . . .	5
Soundcraft Electronics . . . . .	3
Soundcraftsmen . . . . .	8
Sound Workshop . . . . .	17
Standard Tape Labs . . . . .	12
Stanton Magnetics . . . . .	14
Willi Studer America . . . . .	17
Telex Communications . . . . .	13
UREI . . . . .	19
Waters Mfg. . . . .	16
White Instruments . . . . .	12

### dbx sales offices

#### THE SOUND ENGINEERING MAGAZINE

**New York**  
1120 Old Country Rd.  
Plainview, N.Y. 11803 516-433-6530

**Roy McDonald Associates, Inc.**  
**Dallas**  
Stemmons Tower West, Suite 714  
Dallas, Texas 75207 214-637-2444

**Denver**  
3540 South Poplar St.  
Denver, Colo. 80237 303-758-3325

**Houston**  
3130 Southwest Freeway  
Houston, Tex. 77006 713-529-6711

**Los Angeles**  
500 S. Virgil, Suite 360  
Los Angeles, Cal. 90020 213-381-6106

**Portland**  
2035 S. W. 58th Ave.  
Portland, Ore. 97221 503-292-8521

**San Francisco**  
Suite 265, 5801 Christie Ave.  
Emeryville, Cal. 94608 415-653-2122



Broken strings  
Lost plectrums  
Ripped skins  
Limp stands  
Pipless maraccas  
Crackling leads

At least you don't have to worry about the mixer.

**Soundcraft Series 1.**

World's first road mixer built into a strong metal flight case. Turn it off, shut the lid, throw it in the back of the truck. It'll work perfectly tomorrow. And tomorrow and tomorrow, for years to come.

12 into 2 or 16 into 2. Three mixes; main stereo, monitor and echo. Each input channel has variable line/mic attenuation, 4-band equalisation, peak level LED indicator, echo and monitor (foldback), pan, mute and pfl.

Each output has 2-band equalisation, (so does the monitor master) and the illuminated VU meters show master, monitor or pfl. THD < 0.1% Max mic gain 70dB. Relative input noise -125dBm. Multicore cable and stage box also available.

Soundcraft Electronics Limited 5-8 Great Sutton Street  
London EC1V 0BX England Telephone 01-251 3631  
Telex 21198 Telegrams Soundcraft LDN EC1

Soundcraft North America Division  
P.O. Box 883 JFK Station Jamaica New York 11430 USA  
Telephone (212) 528 3158 Telex 01-2203

# performance to suit your needs...


*...and now we've added another digital delay, the "Sound Delay Module" to help cover all your needs...*



**90 db**  
models  
4007  
4008



**80 db**  
models  
4002 4006  
4003 4009  
4010

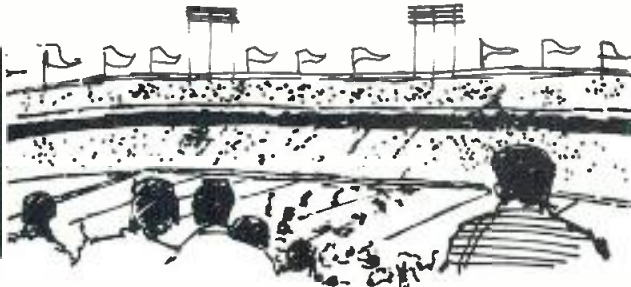

**63 db**  
model  
4000

If you're familiar with our broad line of digital delays, you know they're designed to provide the right specification and price to fill the needs of each and every installation. There are switchable and non-switchable models, portable and rack mount models, and a wide variety of specifications from which to choose.

Now we offer the "Sound Delay Module". Only 1-3/4" high, it delivers a full 80db of dynamic range — for less than \$1000! Now virtually any sound installation needing delay can readily afford it.

From the largest stadium to the smallest hall — you can get just the device you need. But only from Industrial Research Products!

*Please call for specifications and prices*

## INDUSTRIAL RESEARCH PRODUCTS, INC.

321 BOND ST. • ELK GROVE VILLAGE, ILL. 60007  
TELEPHONE: (312) 439-3600 • CABLE — INDREP — CHICAGO

Circle 21 on Reader Service Card

## CALENDAR

### MARCH


- 22-24 **Ace '77 Advanced Consumer Electronics Show.** Pacific Terrace Convention Center, Long Beach, Ca. Contact: Cartlidge & Associates, 415 Clyde Ave., Suite C, Mountain View, Ca. 94043. (415)-969-1556.
- 22-24 **Three-day course on Audiology and Hearing Conservation in Industry,** Rensselaer Polytechnic Institute, Troy, N.Y. Contact: Office of Continuing Studies, Rensselaer Polytechnic Institute, Communications Center 209, Troy, New York 12181. (518) 270-6442.
- 27-30 **NAB Convention Washington, D.C.** Contact: National Association of Broadcasters, 1771 N St., N.W., Washington, D.C. 20036. (202) 293-3500.

### APRIL

- 1-3 **Intercollegiate Broadcasting System Convention.** Hyatt Regency Hotel, Washington, DC. Contact: Rick Askoff, IBS, Vails Gate, N.Y. (914) 565-6710.
- 19-24 **High Fidelity '77 Exhibition.** Heathrow Hotel, London, England. Contact: British Information Services, 845 Third Ave., New York, N.Y. 10022 (212) 752-8400.
- 19-21 **IEEE Electro '77.** New York Coliseum. New York City.

### MAY

- 9-11 **International Conference on Acoustics, Speech, and Signal Processing,** Sheraton-Hartford Hotel, Hartford, Conn. Contact: Clifford Weinstein, B-345, Lincoln Laboratory, P.O. Box 73, Lexington, Mass. 02173. (617) 862-5500 X5465.
- 10-13 **A.E.S. Show.** Los Angeles, Ca. Hilton Hotel. Contact: A.E.S., 60 E. 42nd St., NYC 10017. (212) 661-8528.
- 17-20 **London Electronic Component Show.** Olympia, London, England. Contact: British Information Services, 845 Third Ave., New York, N.Y. 10022. (212) 752-8400.

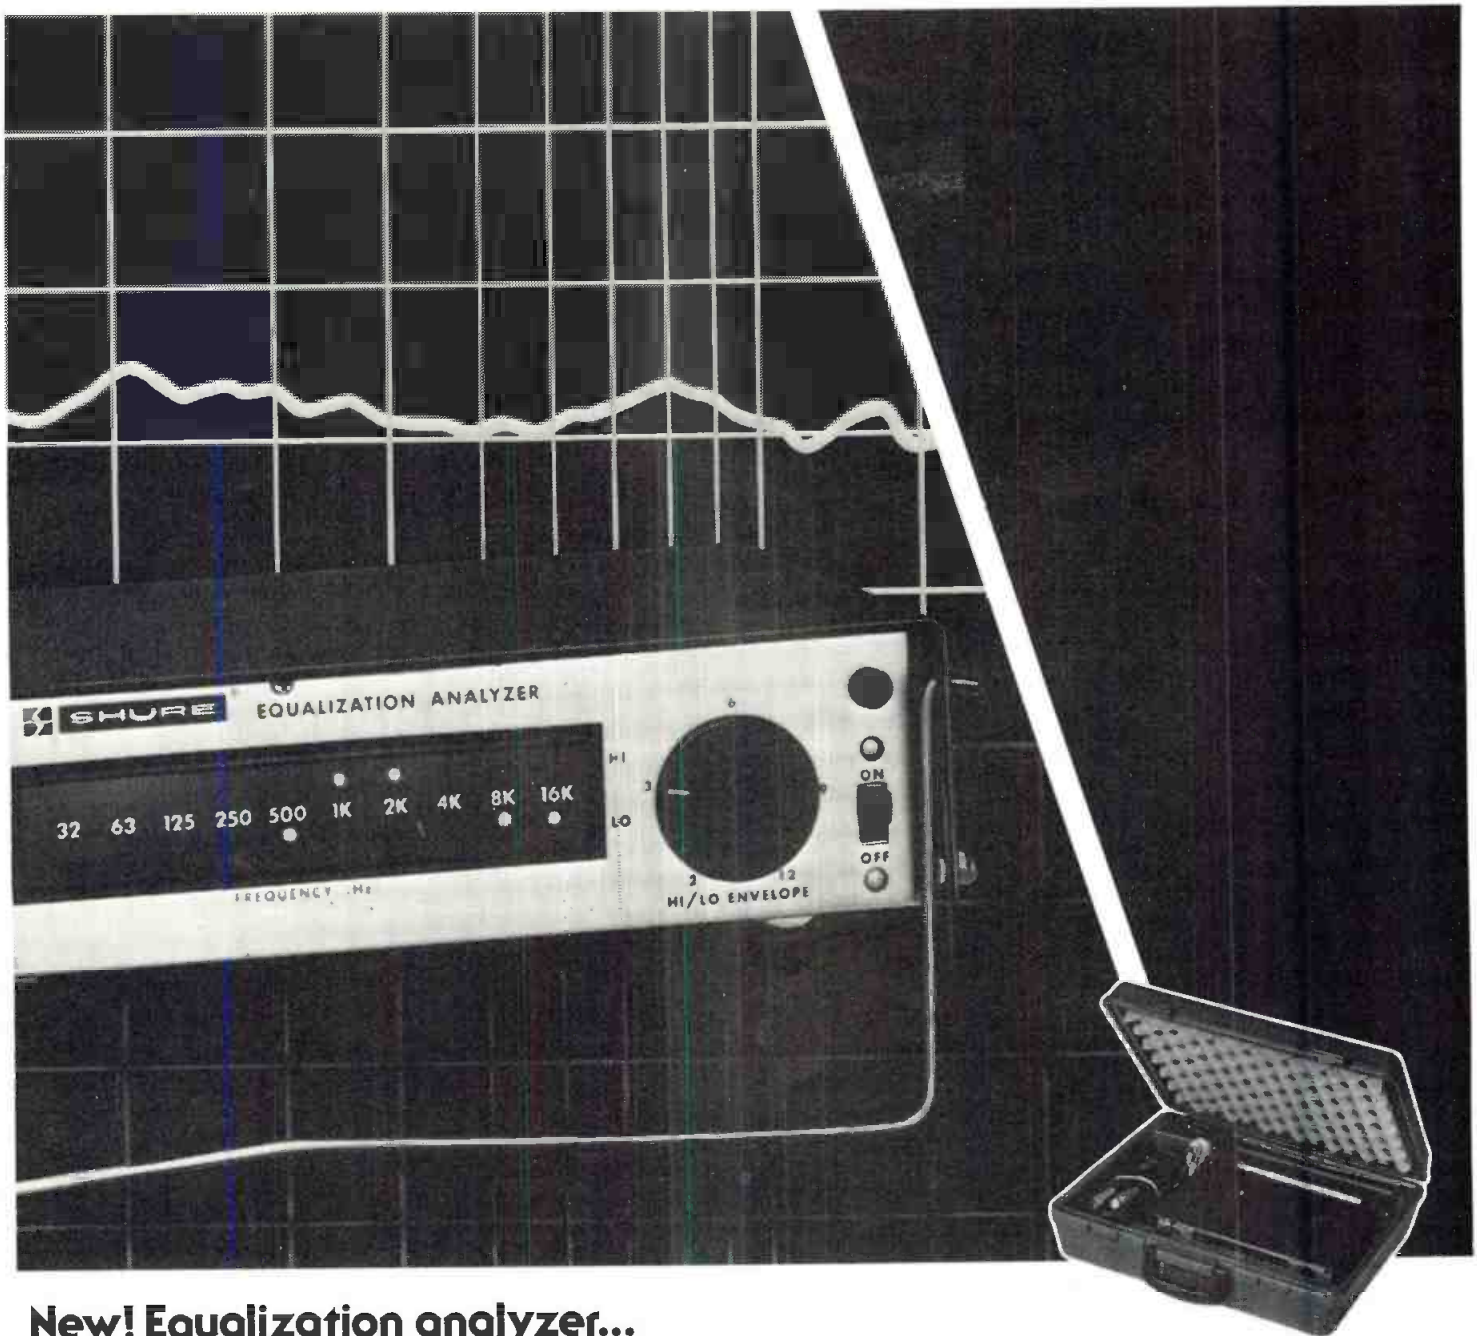

**New! Equalization analyzer...**

# Balance a system...Balance a budget.

Quick and accurate adjustment of sound system frequency response is finally within the reach of most budgets. The Shure M615AS Equalization Analyzer System is a revolutionary breakthrough that lets you "see" room response trouble spots in sound reinforcement and hi-fi systems—without bulky equipment, and at a fraction of the cost of conventional analyzers.

The portable, 11-pound system (which includes the analyzer, special microphone, accessories, and carrying case) puts an equal-energy-per-octave "pink noise" test signal into your sound

system. You place the microphone in the listening area and simply adjust the filters of an octave equalizer (such as the Shure SR107 or M610) until the M615 display indicates that each of 10 octaves are properly balanced. You can achieve accuracy within  $\pm 1$  dB, without having to "play it by ear."

Send for complete descriptive brochure AL558.

Shure Brothers Inc.  
222 Hartrey Ave.  
Evanston, IL 60204

In Canada:  
A. C. Simmonds & Sons Limited

#### TECHNICORNER


The M615 Analyzer's display contains 20 LEDs that indicate frequency response level in each of 10 octave bands from 32 Hz to 16,000 Hz. A rotary hillo envelope control adjusts the HI LED threshold relative to the LO LED threshold. At minimum setting, the resulting frequency response is correct within  $\pm 1$  dB. Includes input and microphone preamplifier overload LEDs. A front panel switch selects either flat or "house curve" equalization.

The ES615 Omnidirectional Analyzer Microphone (also available separately) is designed specifically for equalization analyzer systems.



MANUFACTURERS OF HIGH FIDELITY COMPONENTS, MICROPHONES, SOUND SYSTEMS AND RELATED CIRCUITRY.

Circle 26 on Reader Service Card

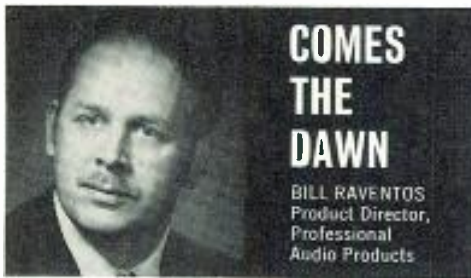

Over the past 50 years, Electro-Voice has pioneered a number of important microphone advances. From ideas as simple as hum-bucking coils (in the late '20's) to elegant concepts like the Cardiline® shotgun microphone.

These improvements were generated from two important resources. First, from our laboratories where new technological developments in materials and methods offered new ways to solve existing problems.

But another resource was in the field, where changing sound requirements spurred fresh thinking and imaginative responses to solve problems as they arose.

It may be ancient history, but E-V was the first to hang a small microphone around the performer's neck. Developed because local and network TV stations needed close-up sound in situations where a boom was not available and hand-held microphones were out of the question.

Today the range and sophistication of E-V microphones is impressive indeed. But it's hardly a time to rest on one's laurels. And indeed, the combination of field testing and laboratory research has brought us to the threshold of a new era in microphone technology.

In the past few years we have become convinced of the unique advantages of electret condenser technology in the design of professional microphones. Our research has delved deeply into the basics of electret theory. And we are now into the third generation of product development. The result is a coherent microphone systems approach that will have important advantages to every user from the aspect of performance, reliability, and functional flexibility.

Our new E-V electret microphones are designed to exceed the performance standards of even the finest conventional condenser microphones. For instance, we have developed more useful unidirectional polar patterns...with less variation at frequency extremes.

A few of you have already had a sneak preview during our field testing. And early reports are encouraging indeed. The age of the electret is dawning. And E-V is making it happen.

For reprints of other discussions in this series,  
or technical data on any E-V product, write:  
ELECTRO-VOICE, INC., Dept. 373BD  
686 Cecil St., Buchanan, Michigan 49107

**Electro-Voice®**  
E-V a gulton company

## A. M. Modulation Monitor

• The audio which can be recovered in the home receiver is highly dependent upon the modulation that is taking place in the transmitter. It is important, therefore, that this modulation process be continuously monitored at the broadcasting station with an FCC approved modulation monitor. The monitor, essentially an operational test instrument that provides accurate data on the modulation taking place, permits adjustments to modulation levels during programming. The monitor contains a number of important functions and circuits, but we only have space to discuss a few of the most important ones.

### THE SIGNAL

When modulation is taking place in the transmitter, the output signal is a modulated rf wave that contains three components: the rf carrier, and two equal sidebands that are above and below the carrier. This is a full, double sideband signal. Each one of the sidebands will carry the entire program modulation intelligence. But even though the complete information is contained in each sideband and technically we can recover the full program audio from either one, because of the demodulation process, both sidebands should be identical in every respect or the recovered audio will suffer in some manner. The sidebands are not audio signals—they are rf wave components that vary at the audio modulation rate.

### DEMODULATION

Demodulation is the reverse process of modulation. The demodulator re-

moves the modulation intelligence from the modulator rf wave and converts this back into the original audio signal. All other functions and metering circuits work with the audio signal that appears at the output of the demodulator, so consequently the demodulator is the most important circuit in the monitor. The accuracy of its performance will determine the accuracy of the entire monitor. Even if every other circuit and function of the monitor performed perfectly, none could yield any more accurate data than the accuracy of the signal presented to them.


### THE DETECTOR

The circuit most commonly used for demodulation in an a.m. monitor is the diode detector. The diode does have some shortcomings, but when the circuit is well designed and operated within its parameters, it will produce the necessary accuracy in results.

The diode, its filter and load make up the detector circuit. The diode removes the sidebands from the modulated wave by rectification, the filter removes the rf components from the rectified carrier, and the output voltage is developed across the load resistor. This is a peak detector whose output is a d.c. voltage that varies at the audio modulation rate. The variation in amplitude of this d.c. voltage is a replica of the original audio signal.

The filter design is important to the detector's operation. The value selected for the capacitor must be such that it will remove only the rf component, leaving the audio envelope component intact. If the value is too large, it will remove the higher audio

Figure 1. The basic monitor circuits.

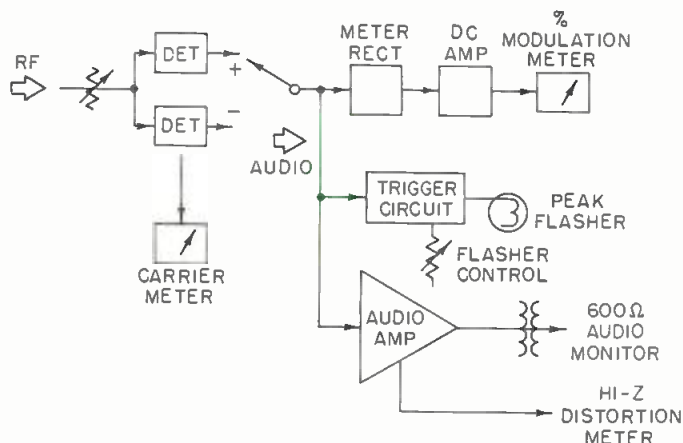



# OTARI MX-5050 the original (and still the best) compact professional recorder

Just over two years ago, Otari introduced a unique new product—the first truly professional recorder in a compact package—the MX-5050. Since then, the performance and reliability of this innovative new machine have been tested and proven in over a thousand critical professional applications—by broadcasters, recording studios, A/V departments, musicians, and semipro recordists worldwide. Universal acceptance and repeat orders by these satisfied customers tell this remarkable recorder's success story better than we can.



*Bias can be re-optimized in seconds.*

As you compare the MX-5050 with other recorders, keep this in mind. The MX-5050 is not a hi-fi machine with a few professional features added later as an afterthought. It was designed from the ground up based on Otari's 10 year experience as Japan's leading manufacturer of professional recorders and high speed duplicators. It is a full professional machine with the performance, features, and field proven reliability that you expect to find only in the larger professional recorders.

Here are some of the key reasons why the MX-5050 is the best compact recorder available today.

**Production Features:** Creative production is simplified with: Front panel edit to spill tape. Lift-up head cover to mark splices and clean heads. Built-in splicing block on head cover. Adjustable cue to defeat head lifters. Selective reproduce to add new tracks in perfect time synchronization. Two speed operation, 15 and 7½ or 7½ and 3¾ ips (field changeable in dc servo versions).

**Performance Features:** Headroom is 19 dBm, a full 15 dBm over the switch selectable fixed output of +4 dBm. This standard reference level output can be rear panel switched to -10 dBm to drive a PA system or power amplifier. S/N ratio is NAB weighted 69 dB full track, 68 dB half track, and 65 dB quarter track. Crosstalk is greater than 60 dB half track. Outputs are 600 ohm balanced (standard on half track) or unbalanced. Line input and output connectors are XLR.



**Operating Features:** Bias is front-panel continuously adjustable (not limited to fixed positions). With built-in test oscillator (not available on other compact professional recorders) bias can be optimized in seconds when changing tape. Record EQ and standard reference level are also front adjustable. Straight-line tape path simplifies threading. Capstan is located on back side of tape for improved tape life. An extra reproduce head is standard on all versions to allow playback of tapes in different formats. For pitch control and freedom from power line variations, an optional dc capstan servo is available with ±10% correction range.



*Easy threading; capstan on back side.*

**Versatility:** Available in full-track (with half-track reproduce capability standard), two-track, and quarter-track versions. Walnut case (standard), rugged portable road case, rack mounting adaptor, or floor console. Universal power supply standard. Low impedance input and output transformers and remote control also optional accessories.

See your nearest Otari dealer for the full story or contact Otari. And, if it's multichannel you need, ask about the standard-setting four and eight channel versions of the MX-5050.

## OTARI

Otari Corporation  
981 Industrial Road  
San Carlos, Calif. 94070  
(415) 593-1648 TWX: 910-376-4890


Otari Electric Co., Ltd.  
4-29-18 Minami Ogikubo  
Suginami-ku, Tokyo 167, Japan  
(03) 333-9631 Telex: J26604

Circle 19 on Reader Service Card



# Soundcraftsmen — the most flexible Equalizer...

ANY FURTHER QUESTIONS? PHONE ANTHONY AT (714) 556-6191 COLLECT!

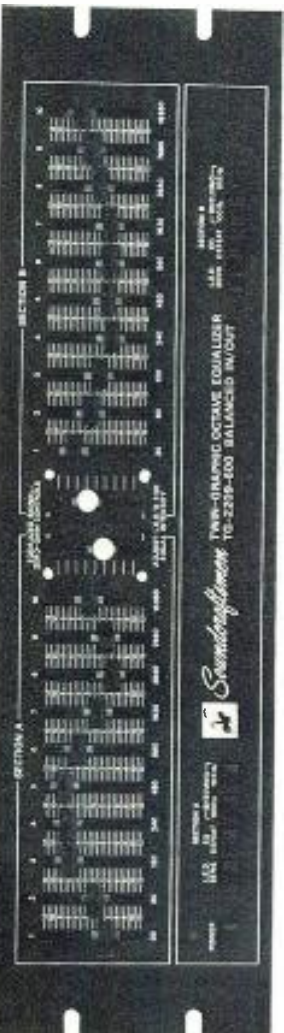

SOUNDCRAFTSMEN, 1721 NEWPORT CIRCLE, SANTA ANA, CA 92705

## broadcast sound (cont.)

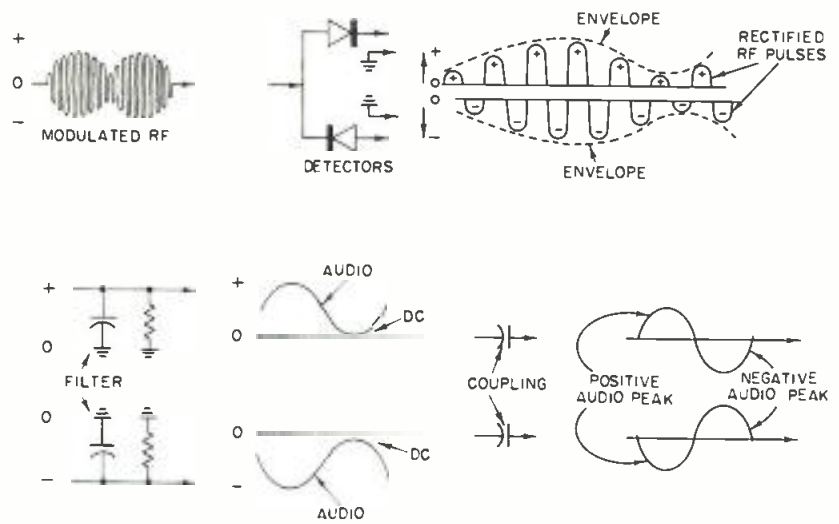


Figure 2. Detection process. (Rf waveforms are shown exaggerated,

frequency components and produce a poor audio bandpass for the detector. And if the value is made very large, then the circuit becomes a d.c. power supply instead of a detector. The load must be high in resistance value or it will affect the detector's efficiency and make it work at somewhat less than a peak detector.

### DETECTION

Two separate detector circuits are used in monitors to provide two independent output signals. These detectors are placed in opposite polarity to the rf wave so that one detector will rectify the positive going half of the wave, and the other detector will rectify the negative going half of the wave. Each of these detectors is recovering the same modulation information but the separate outputs are out of phase with each other. The output of each detector can be selected by a front panel (+) or (-) peak modulation switch. Whichever detector is selected by this switch will then feed all the other circuits of the monitor.

In a.m. modulation, it is important that the positive and negative audio modulation peaks are observed and measured, so this is why they are made selectable. The audio peaks could be split by a phase splitter but the common practice is the use of two detectors. This makes things less complicated, gives a better review of the modulated wave, and makes the following circuits more simple in design.

The output of the detector which rectifies the positive half of the rf wave is a varying d.c. voltage that is positive with respect to ground. When the d.c. component is removed by a coupling capacitor, the resulting audio signal positive peak is in phase with the original audio—that is, both positive

audio peaks are in the positive direction. The output of the detector which rectifies the negative half of the rf wave is a varying d.c. voltage that is negative with respect to ground, and the recovered audio signal is out of phase with the original audio. Therefore, the original positive audio peak is now going negative while the original negative peak is now in a positive direction. As far as the monitor circuits are concerned, regardless of which audio peak is selected for observation, they see only positive going voltages at their inputs.


### SENSITIVITY

The diode detector is somewhat insensitive and requires a relatively large input signal or it will become non-linear and produce a distorted output. This lack of sensitivity is no real problem since the monitor is designed to couple directly to the transmitter output circuit by coaxial cable. In this arrangement, however, there is a danger that too much signal may be applied to the diode. This would overload the circuit and produce a distorted output, and it can damage the diode and circuit components.

The semi-conductor diode does not produce a "clean" baseline (a.c. signal zero axis line). Some reverse current will flow on the reverse half cycle of the a.c. signal and this will allow part of that half-cycle to appear in the output. The forward conduction curve of the diode exhibits a bend at the portion where the conduction begins. When the input a.c. signal is too small in amplitude, then operation is in this area of the curve and the output will be very non-linear. The input signal must be large enough so that the operation is on the straight line portion of the forward conduction curve. Some

# BRH90

# RADIAL HORN

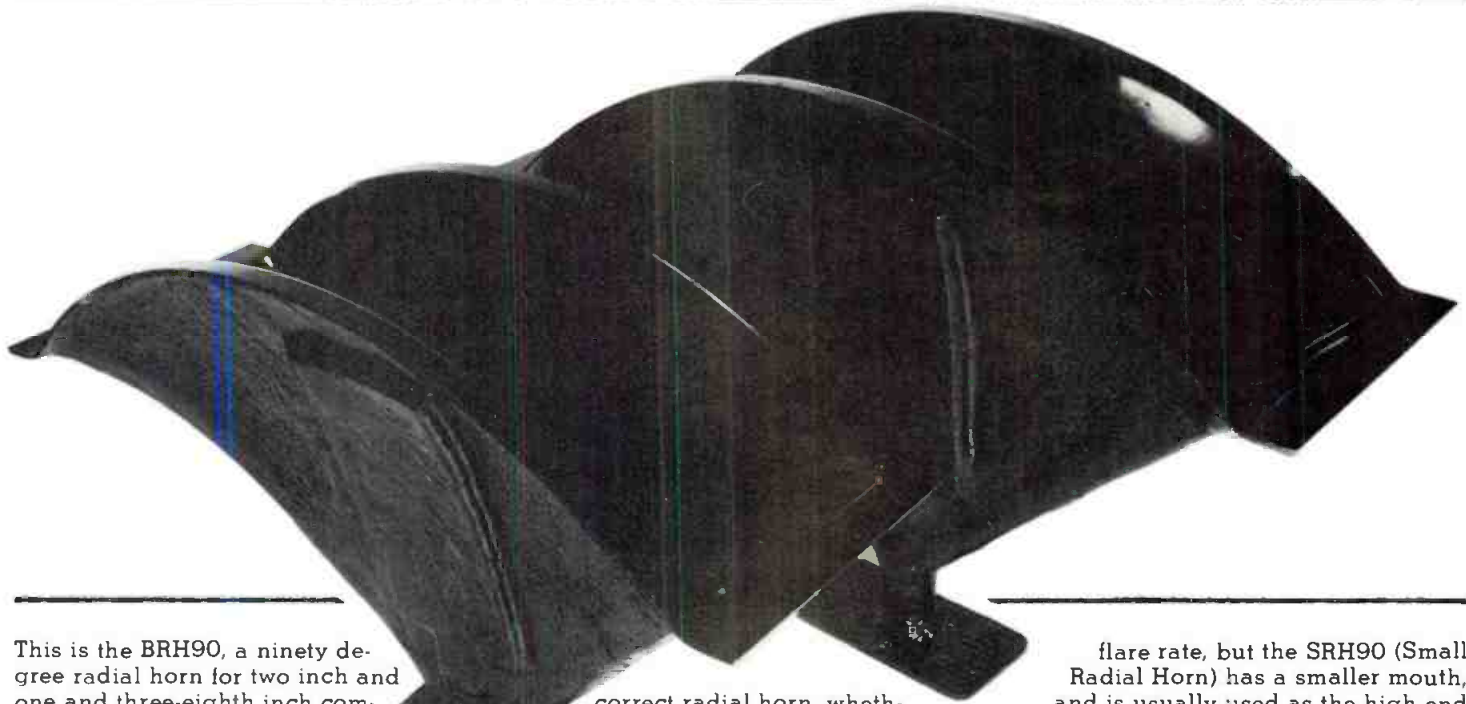

This is the BRH90, a ninety degree radial horn for two inch and one and three-eighth inch compression drivers. Its an easy name to remember —Big Radial Horn, 90 degrees— very simple. But there's nothing simple about our design or construction.

Community horns are made of fiberglass. Not sprayed-up cheaply-made fiberglass, but fiberglass hand-laminated by experts and constructed to our exact requirements for maximum acoustical accuracy, resonance-free rigidity and unparalleled strength. Our horns are absolutely weatherproof. They will *never* corrode or rust out. Nor are they ever likely to break. Not now and not forty years from now.

But the real mark of Community radial isn't apparent unless you cut it in half as we have done here. If you look closely at the cutaway, you will see that the corridor in the horn just past the throat gets extremely narrow before it flares out. That pinch in the horn is absolutely necessary to any mathematically and acoustically


correct radial horn, whether it is metal or fiberglass, and only Community does it the way it should be done. And not only do we do it right, we do it cheaper.

We also make two 90° radials for use with one inch and screw-on drivers —the RH90 and the SRH90. Both have the same

flare rate, but the SRH90 (Small Radial Horn) has a smaller mouth, and is usually used as the high end in three way systems.

Talk to your Community distributor. Even though he also sells our competitor's products, he'll probably tell you that there is nothing available today that equals a Community horn.

He's right.

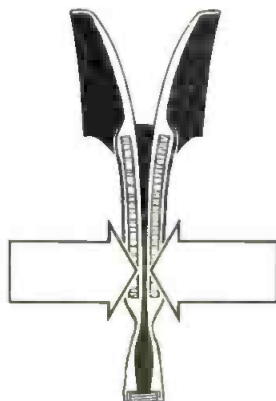

	BRH90	RH90	SRH90
Flare Rate	240Hz	345Hz	345Hz
Operating Range	500Hz up	600Hz up	1,000Hz up
Size: H.	11 1/8"	12 1/4"	6 1/2"
W.	33 3/8"	30 3/8"	24 3/4"
D.	21"	20 1/2"	18 3/4"
Weight	25 LB.	20 LB.	12 LB.
Finish	Black, High Gloss	"	"
Horizontal Dispersion	KHz -3dB -6dB	KHz -3dB -6dB	KHz -3dB -6dB
	6 85 95	6 80 90	1.2 95 100
	2 90 90	2 90 100	3 90 95
Vertical Dispersion	KHz -3dB -6dB	KHz -3dB -6dB	KHz -3dB -6dB
	6 50 90	6 55 100	1.2 50 70
	2 35 50	2 35 50	3 40 65
	10 20 35	10 20 35	10 20 30

# Community

COMMUNITY LIGHT & SOUND, INC. 5701 GRAYS AVE., PHILA., PA. 19143 (215) 727-0900

Circle 36 on Reader Service Card

# The "Click and Pop" machine

only by

**SAE**



Ever since the invention of the recorded disc annoying "clicks" and "pops" caused by scratches, static and imperfections have consistently disturbed the listening pleasure of music lovers.

Now, SAE introduces the unique model 5000, an Impulse Noise Reduction System which eliminates those unwanted sounds with no adverse effect on the quality of the recorded material.

This breakthrough in electronic circuitry is so demonstrably effective that the SAE 5000 is destined to become an essential part of any sound system.

The SAE 5000 is compact and sleek, built to SAE's exacting standards, and ready to enhance the performance of any system, from the standard receiver/turntable combination, to the most sophisticated audiophile components.

SAE is proud to add the 5000 to their broad line of *Components for the Connoisseur*.

**SAE**

Scientific Audio Electronics, Inc.  
P.O. Box 60271, Terminal Annex  
Los Angeles, Cal. 90060

Please send more information on the 5000.

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ Zip \_\_\_\_\_

## broadcast sound (cont.)

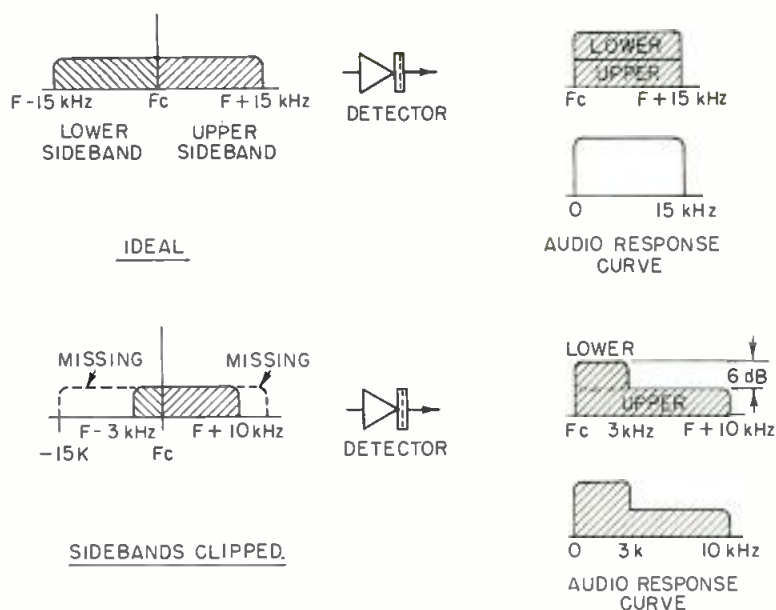


Figure 3. Non-symmetrical sidebands affect the amplitude response curve of the recovered audio.

monitors forward bias these detectors almost to the point of conduction in order to improve their linearity. But even with this design technique, the input level must be carefully adjusted.

### SELECTIVITY

The diode is a non-selective device that will rectify any a.c. signal that appears at its input with enough amplitude to make the diode conduct. The diode cannot distinguish the various components of the modulated wave, but will rectify the instantaneous voltages of all the components present at its input at any instant. In so doing, the diode is recovering *both* sidebands at the same time and adds them together in its output (in phase). It is because of this detector action that both sidebands should be identical in every respect. When they are not, when they are added together in the detector output, the audio will suffer according to the differences of the sidebands.


For example, assume that sideband slipping has removed most of the lower sideband because of faulty tuning. If we used a sweep signal to modulate the transmitter, the waveform of the sweep envelope at the output of

the detector would appear similar to the FCC's *Ideal Detector Curve* for t.v. picture transmission. In the band-pass area where both sidebands are present and equal in amplitude, these are added together in the detector output. But in the area where the lower sideband is missing, only the voltage of the upper sideband is present, so the voltage amplitude is down one-half, or 6 dB. Sideband clipping in this case has produced a very poor audio band-pass for the system. (The t.v. receiver, by the way, corrects for the unequal sideband transmission by having its IF response curve sloped.)


### CARRIER LEVEL

The average value of the carrier does not change during modulation. If any change does occur, this is termed *carrier shift*. FCC rules require that any carrier shift be kept within a 5 percent tolerance. A number of conditions can cause carrier shift in the transmitter, but a measurement of this factor is also a measure of transmitter performance under modulation conditions. The output of the detector is a d.c. voltage that is derived from the rf carrier, so the current flowing in the

Fig. 4. The modulation meter circuit is a high impedance fet meter with special

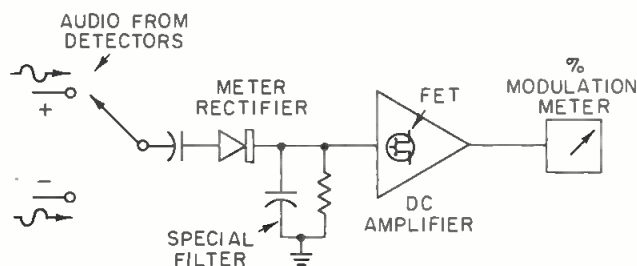

JBL MODEL 4315 STUDIO MONITOR

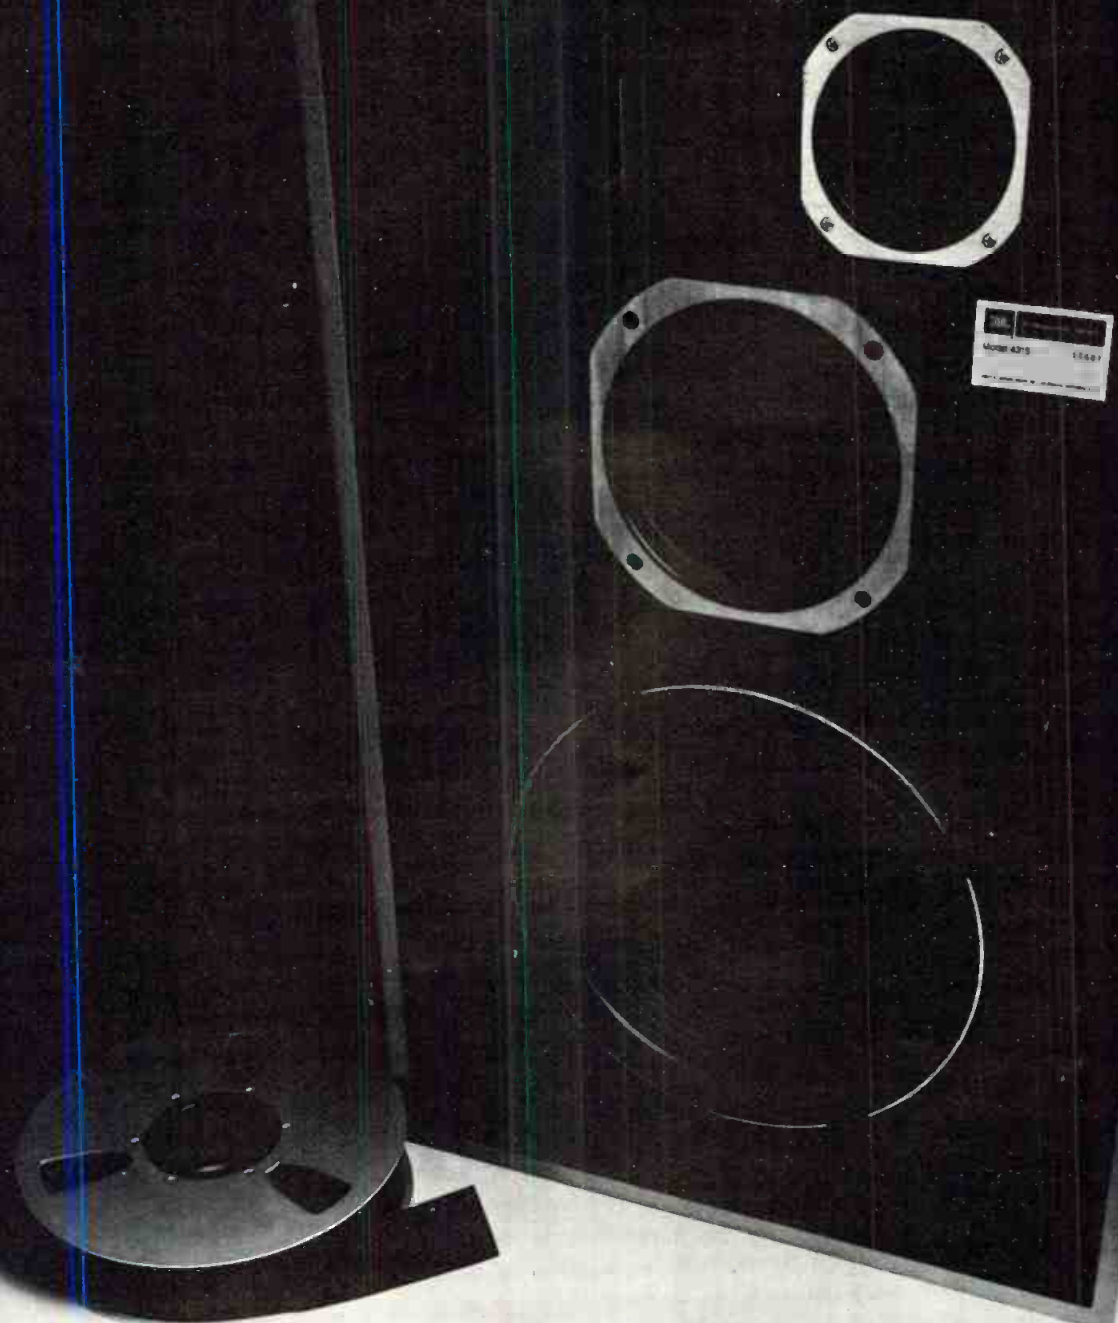

JBL's 4315.  
There's never been a wider range  
studio monitor. Of any size.

And, four more things:  
It's a four way system. It has the most sophisticated  
cross-over network ever designed. It's compact, shallow,  
portable. Perfect for wall mounting, horizontally or  
vertically. It's yours for \$771.

There's more. Much more. Go hear the rest.



# You're in Good Company

## when you use STL magnetic Test Tapes

STL magnetic test tapes are widely used by major recording studios, equipment manufacturers, government and educational agencies throughout the world. The most comprehensive test tapes made, they are offered in 1" and 2" sizes as well as flutter tapes and all other formats.

You know your system is in step with the rest of the industry, compatible and interchangeable, when you employ STL tapes, the most accurate reference available.

Write for a free brochure and the dealer in your area.

Distributed by Taber Manufacturing & Engineering Co.

**STL** STANDARD TAPE LABORATORY, Inc.  
26120 Eden Landing Road / Suite 5  
Hayward, CA 94545  
(415) 786-3546

Circle 27 on Reader Service Card

## MODEL 4100 STEREO EQUALIZER



- Ten one-octave bands per channel, 31.5 Hz to 16 kHz
- $\pm 10$  dB boost/cut on continuous control
- Variable low-cut control from 20 Hz to 160 Hz, 12 dB/octave roll-off
- Optional low-level crossover for bi-amp systems
- Sealed Mil-spec rotary controls for low noise operation
- Low noise circuitry, wide dynamic range: -92 dBm to +18 dBm
- Magnetically-shielded, precision-tuned inductors
- High linearity, low distortion

Call or write today

**White instruments, incorporated**  
PHONE AREA 512/892-0752  
P.O. Box 698 AUSTIN TEXAS 78767

(Dealer inquiries invited)

Circle 22 on Reader Service Card

## broadcast sound (cont.)

detector output circuit is measured with a front panel meter which is labeled *Carrier Level* or similar terminology.

Metering the d.c. current of the detector in this manner serves two useful purposes. Since this meter measures the output of the detector, then it can be used to set the rf input to the detector properly. And since any change in the average carrier value will change the average current in the detector output, a proportional amount, we can read the carrier shift directly from this meter.

### MODULATION METERING

The modulation percentage caused by either the positive or negative audio peaks is measured with a high impedance voltmeter circuit that is the equivalent of a vtvm or fet meter. This is a quasi-peak indicating circuit and it must contain special damping and meter ballistics, according to the FCC rules.


The positive or negative modulation peaks selected by the switch will feed the audio signal to a meter rectifier circuit. The output of this rectifier circuit is a varying d.c. voltage that now has the special damping, and this voltage is amplified by a d.c. amplifier which drives the front panel modulation meter. The r-c filter in the rectifier circuit provides the special damping characteristics. The meter face has two scales: one in percentage for modulation of program, the other in dB for tone modulation and testing.

### PEAK FLASHER

Since the modulation meter cannot follow peaks because of its characteristics, a true peak indicating circuit is provided. This is an electronic circuit, such as a Schmitt Trigger or similar circuit, which has its threshold sensitivity preset by the front panel flasher control. When an audio peak exceeds this threshold, the trigger will fire and turn on a lamp or other visual device to warn that a peak has exceeded its setting. This circuit will catch many peaks that do not show up on the modulation meter.

### OTHERS

The monitor will provide an audio output for aural monitoring and for making distortion measurements. Individual models also provide many other features. But regardless of the features, the monitor should be kept in calibration, good repair and operated properly. Next month we will discuss some of the problems that can occur in monitoring. ■

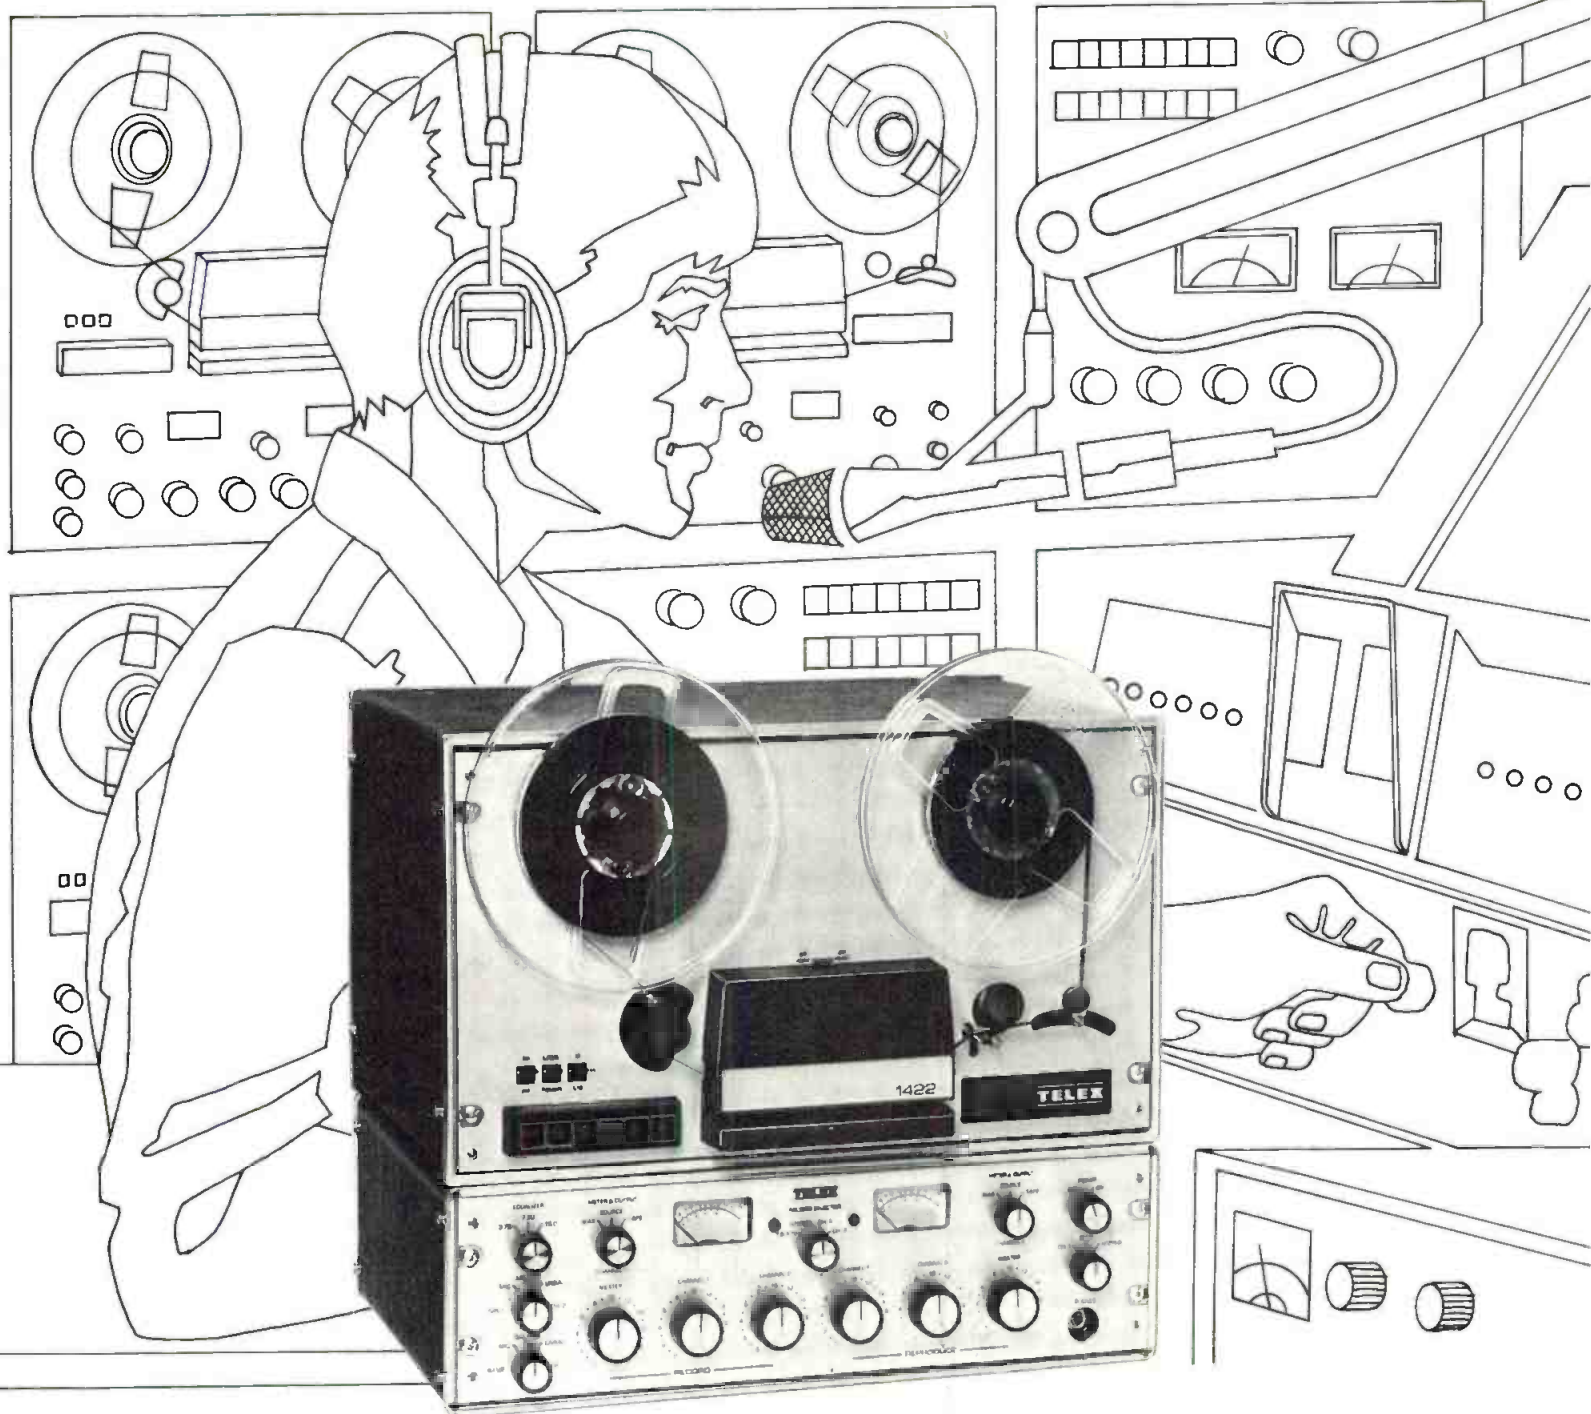

## Old-New Reel Time Recorder

Telex/Magnecord series 1400 broadcast quality recorder/reproducer. An old name that spells reliability. A new design for today's state of the art.

The Old. Telex/Magnecord products are still made in the USA so parts and service are always available. The series 1400 is still built on a solid die cast aluminum main frame for reliable operation around the clock. It's still available in full, half and quarter track configurations, has fail safe differential brakes and accepts 8¼ inch reels. It also still comes with three motors—but then, that's touching on the new.

The New. A brushless d.c. servo drive with a crystal oscillator control reference so accurate it virtually eliminates program timing errors. New, three speeds: 3¼ - 7½ - 15 ips. New catenary head block for straight tape loading, the con-

venience of one hand cueing and the bi-level illumination of push button controls. New DTL logic controls eliminate EMI and provide fast, spill proof tape handling gentle enough for half mil tape. And new electronics, clean to 60 dB S/N at all speeds.

If you're looking for a real time, reel recorder with old name reliability but designed for today's demands, you'll find it in the Telex/Magnecord series 1400. For complete information please write:

PRODUCTS OF SOUND RESEARCH  
**TELEX**<sup>®</sup>  
 COMMUNICATIONS, INC.

9600 ALDRICH AVE. SO. • MINNEAPOLIS, MINN. 55420 U.S.A.  
 Europe: 22, rue de la Legion-d'Honneur, 93200 St. Denis, France  
 Canada: Telak Electronics, Ltd., Scarborough, Ontario

Circle 25 on Reader Service Card



Bob Helbush, Chief Engineer, making a quality control check using a 681 cartridge.

## WKLS, Atlanta, broadcasts 100% disc-to-air. That's why it uses Stanton's 681 series... exclusively

Top notch broadcasters who capture a large share of the listening audience, are critically aware of the necessity to achieve a superior quality of sound. Station WKLS is just such a station.

As Bob Helbush, chief engineer, states: "We broadcast 100% disc-to-air except for some commercials. So, for maximum quality sound and phase stability, we use the Stanton 681 SE for on-the-air use. We consider it the ideal answer for that application. And our program director uses Stanton's 681 Triple-E for auditioning new releases before we air them".

And Don Waterman, General Manager, added: "Today, every station in the SJR Communications group . . . all eight of them, all in Major Markets . . . use Stanton 681 cartridges on every turntable".

There are good reasons for this vast acceptance. Stanton's 681 Calibration Series cartridges offer improved tracking at all frequencies. They achieve perfectly, flat frequency response to beyond 20 Kc. And the top-of-the-line, superb 681 Triple-E has an ultra miniaturized stylus assembly with substantially less mass than previously, yet it possesses even greater durability than had been thought possible to achieve.

Each 681 Series cartridge is guaranteed to meet its specifications within exacting limits and each one boasts the most meaningful warranty. An individually calibrated test result is packed with each unit.

Whether your usage involves recording, broadcasting or home entertainment, your choice should be the choice of the professionals . . . the STANTON 681.

Write today for further information to Stanton Magnetics, Terminal Drive, Plainview, N.Y. 11803.



**STANTON**

Visit us at the NAB Show,  
Booth No. 21

Circle 14 on Reader Service Card

● Last month, I reached the point of preparing to discuss what part various media, such as radio or television, and prerecorded tapes, can play in developing an effective educational program. The best way to approach this is to "walk through" what a good teacher can do to promote learning, then see how this can be applied to mediation.

Curiously, during the month since I wrote that, I have had some interesting responses that are quite relevant. One of them refers back to 1973, and says the reader has retyped part of one of my columns of that time, and gives copies of it to "the better teachers."

In July, 1973, in a column that addressed some of the problems of designing good a/v materials, there was a paragraph that read:

*A good teacher is not required to know everything the students will learn in that teacher's class. I have seen some dramatic instances to support this statement. The good teacher's capability can be summed up as knowing how learning happens, in a variety of different human beings, and being competent at causing it to happen.*

When considering the matter of finding a continuing place for media in effective education, we still need to analyze how a good teacher can cause learning to happen effectively in every student making up that teacher's class. which is what any good teacher can do.

### MOTIVATION: FROM OUTSIDE AND INSIDE

An unmotivated person cannot be motivated from inside: the first motivation must come from outside. But it is not truly effective until the source has transferred to become internal. For example, you might have no interest in, say, number games. But if a good presentation on t.v. starts your interest and leaves you with a desire to explore some angles the t.v. presentation only touched on, you will go on working at it after the t.v. program is over.

Perhaps number games do not in-

terest you anyway. In that case, you will switch off the t.v. when such a program comes on. That is not to say that, given the right lead in, number games may not interest you at some later date.

Motivation as applied by educators is always external.

To sign up for a paid course, a student must first be motivated enough to part with, or to persuade his parents to part with, the necessary tuition. After that the educators possibly don't care whether he learns or not because they have his money anyway. The correspondence schools, and many that use mediation too, are little better. The student must commit himself to take the whole course, or at least to pay for the whole course, before he begins. Then, because internal motivation does not follow through, a great many students drop out. Many who stay with it do not learn what they hoped to derive from the course.

### FROM BOTH ENDS


To keep up newsstand circulation, a publisher must maintain reader interest. This month's issue, or this week's issue, must make the reader want to read the next one. What is wrong with building that kind of internal motivation into educational material so that lesson 7 maintains the student's interest and, at the end, makes him anxious to get into lesson 8? It can be done. Many of our courses prove this. That is what we need to address in our consideration of what media can do.

Why is the student turned off, and how can the good teacher turn him on? This is the kind of thing you need to "walk through," in finding what goes into a program that goes over the air, radio or t.v., and what goes into the part the student sits down with on his own.

When the student either pays for the course in advance, or signs up for it so he is obligated to pay, he has two



# Complete Audio Distortion and Frequency Response ...Automatically

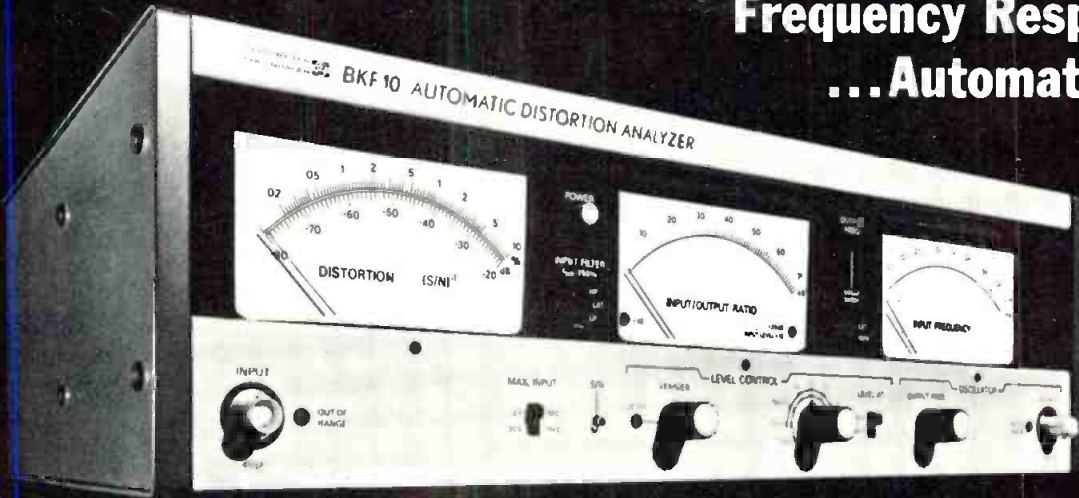

**RADIOMETER**  
**COPENHAGEN**

Comprehensive distortion and frequency response measurements are easily performed with the BKF10 Automatic Distortion Analyzer. This unique instrument combines a distortion meter, a low distortion audio sweep oscillator (<0.01% t.h.d.) and an input/output ratio meter. Operation is totally automatic... No balancing, nulling or level setting is required. Addition of a recorder provides complete distortion and frequency response curves. Send for complete information.



**THE LONDON COMPANY / 811 SHARON DRIVE / CLEVELAND, OHIO 44145 / (216) 871-8900**

Circle 20 on Reader Service Card

# The Live-Performance Equalizer

The list of acts using the Orban/Parasound 621 Parametric Equalizer on the road reads like a "who's who in the Hot 100." And no wonder—like the proverbial one-man band, the O/P Parametric replaces a whole ensemble of audio processing devices—and never misses a beat. Not only will the 621 perform broadband equalization with a minimum of ringing (unlike third-octave equalizers), but its "Constant-Q" design also lets it create narrowband, tunable notches for feedback suppression.

Each of the four bands tunes continuously over 4.3 octaves with no change in curve shape. The "Q" of each band is continuously variable over a ratio of better than 10:1. Overload/noise ratio is a high 107 dB (typical); midband THD is below 0.01% at +18 dBm, assuring wide dynamic range and recording studio quality. A peak-stretching overload light and front-panel gain control permit instant correction of overload. And the 12 dB of available gain can be very handy when you're caught short.

Above all, we know that there are no second takes

in live shows. That's why we insist on an exceptionally rigorous quality control program. For example, each opamp used in the 621 is pre-tested before installation, and all 621's are carefully burned-in at high temperature before shipment. And it's nice to know that if trouble should ever develop, Orban/Parasound is well-known for fast, fairly-priced service. We've been in business for eight years; we are committed to customer satisfaction because we plan to be around many years more. Our equalizers reflect this commitment to quality, value, and service. They await your examination at your Orban/Parasound distributor. Write us for his name, and further information.

**orban/parasound**

680 Beach Street  
San Francisco, Ca. 94109  
(415) 673-4544

Write for free article: "How to Choose Equalizers for Professional Recording Applications."



Circle 18 on Reader Service Card

## theory & practice (cont.)

concerns: (1) how can he maintain interest, so as not to waste his money; (2) if he doesn't like the material or has difficulty with it, how can he escape from his obligation to pay?

Hampered by this kind of suspicious attitude, the student is not likely to approach learning with an open mind. Often those designing or presented the course are not motivated to do their best either because they have already been paid.

Why not design a course the way a publisher designs his publication, with one part stimulating enough to lead the student to want to continue? In other words, the student would pay for the materials necessary for each segment, say, a series of ten lessons, as he comes to it. He would not be obligated in any way other than by his own interest, to make the entire investment for the whole course. With their creativity on the line that way, the educators designing the course and the teachers delivering the audio part will be really challenged to show ingenuity and clarity, resulting in quality shows that enhance the reputation of the

radio or t.v. station.

## TEACHING TECHNIQUES

One basic teaching technique that applies beautifully to instruction through mass media is the idea of individualization. Good teachers try to work on a one-to-one basis as much as possible. In a classroom situation they do as little lecturing as possible, getting the students to follow through either alone or in small groups. Obviously, this is the way an audio presentation will work, stimulating the student to continue on his own, using the materials he has purchased.

Teachers commonly categorize students into those who are self-starters and those who need to be spoonfed. There are other individual differences in the way people learn, of course, but I'm not discussing them in this context. What we want to keep in mind is the way we approach both the motivated and the unmotivated with the same material, reaching both groups. Actually, motivation is not an inherent quality; it is a phase people move through. Good learning is what self-starters achieve. One of our primary objectives is to move students out of

the spoonfeeder phase into the self-starter category, moving a student from entire dependence to the first sign of individual initiative or from a little initiative to more confidence.

## PERSISTENT OR TRANSIENT MATERIALS

Let's take a look at the way these two groups approach learning materials, which is what we are actually selling. Such materials are persistent, semi-transient, or transient.

The commonest form of persistent material is the book. A self-starter will go off into a corner with a book and absorb what it has to offer with no help from anyone. The spoonfeeder, unless he is cajoled into it, approaches the book with trepidation. He can't seem to organize his thoughts well enough to merge with the author's presentation. (Training this capacity is a major concern of the elementary schools but the training doesn't always work.)

Audio cassettes are of a semi-persistent nature. The material is not solid the way it is on the printed page, but it is possible to punch the rewind button and hear the information again. The self-starter doesn't mind replaying any piece he has trouble with, but spoonfeeders just throw up their hands. They do not expect to understand what they hear; therefore they don't. "You see, I told you I was dumb!" They will not hit the rewind button because they figure hearing the tape twice will not make them any less stupid. It is this false self-evaluation that you have to change to convince them that they can do at least a few things they previously thought they could not do.

The classic transient presentation of information is that delivered over the radio or on t.v. Once it is over, the student has no way of retrieving the information. This is why the choice of material offered over the air has to be carefully selected. It needs to review material the student already knows or lead into further fixation of information by the student through the use of persistent (books and workbooks) or semi-persistent (tape cassettes) material. The ideal lesson will contain both review and motivation as well as lively entertainment value.

## BRIDGING GAPS

In designing a radio or t.v. educational program we need to keep these factors in mind. First of all, "out there" we have two kinds of students, the self-starters and the spoonfeeders. We want to encourage the spoonfeeders without boring the self-starters, avoiding "baby talk" or offering ma-



**Waters MM faders  
mean more mixing  
in less space**

With Waters  $\frac{3}{4}$ -inch thin-line conductive plastic faders you can cram 24 channels into an 18-inch mix bay for high density recording studio applications, sound reinforcement and location mixers, and lighting control consoles.

Waters MM faders retain all the superior quality of our accepted LM series including choice of  $2\frac{3}{4}$ -inch or 4-inch travel; 600 ohm or 10 k impedance; linear, audio or true log characteristic; and our famed trouble-free long service life. For more mixing in less space circle reader service number or call Bob Waters at 617-358-2777 for more information about thin-line faders.

**WATERS  
MANUFACTURING, INC.**  
LONGFELLOW CENTER, WAYLAND, MA 01778 • (617) 358-2777

# The Sound Workshop 421 Broadcast/Disco Mixer.

The first broadcast mixer hip enough for disco...  
or perhaps the only disco mixer good enough  
for broadcast.



**Sound Workshop**  
PROFESSIONAL AUDIO PRODUCTS

bringing the technology within everyone's reach

The Sound Workshop 421 Broadcast/Disco Mixer...\$500.

1040 Northern Blvd. Roslyn, New York 11576 (516)621-6710

Check ✓  
our



## Multi-TRACK RECORDERS

The goal of every studio owner is to have the most reliable recording equipment available, knowing well that "down time" because of equipment failure costs him money. We at **STUDER** proudly feel that we not only have the most reliable recorders but that we also have a service philosophy that other companies envy. Let us tell you about it.

Write or call, Willi Studer America, Inc., 1819 Broadway, Nashville, TN. 37203. Phone 615-329-9576, Telex 55-4453. In Canada, Studer Revox Canada Ltd. Phone 416-423-2831, Telex 06-23310.

# STUDER

a standard  
of excellence.

# Our Synergistic System

We make one of the finest tone arms in the world (ask the editors of AUDIO magazine) but how well it performs is dependent—at least partly—on the cartridge.



But even the finest combination of cartridge/tone arm is influenced by how clean the records may be... and how clean the stylus is. So we have both a superb manual and automatic record cleaner, and a fine stylus cleaner.

We also make one of the finest phono cartridges in the world (ask almost anyone about the AT20SLa) but how well it can perform is governed at least in part by the tone arm.



And of course the whole system works best only if it is free from such things as acoustic or mechanical feedback (especially with a cartridge having subsonic capabilities like ours), and excessive cable capacity. We solve these problems neatly and effectively with our AT-605 Audio Insulator and AT-610 Low Capacity cable set.



Finally, we also make one of the finest headphones in the world (ask Len Feldman) our incredible AT-706 that makes all the care that went before audibly worthwhile.

Any one of these components in your system can assure you of the very finest standard of performance— from that component. All of them *together* provide an unparalleled listening experience.

Start anywhere in our system. You'll soon find that as you *add* Audio-Technica products, you *multiply* enjoyment.



AUDIO-TECHNICA U.S., INC., Dept. 37BD, 33 Shiawassee Avenue, Fairlawn, Ohio 44313

terial of a ridiculously simple nature that is common knowledge anyway.

There is a point at which the needs of both groups converge. I call it "bridging gaps." As any elementary school teacher can tell you, there are dynamite readers who suddenly hit a brick wall when they come to complicated unfamiliar words that must be attacked phonetically. Such self-starter kids have galloped through reading at a great pace, memorizing words and grabbing context clues. But they have leapfrogged over phonics. If the teacher sets up a special "phonics group" to review phonics for the leapfroggers while teaching slower readers, the device not only gets the job done but encourages the slower students who are delighted to see that some of the "smart kids" have the same problems with sounds they are encountering.

This technique also works with grownup students, some of whom zoom over material, losing out on important details and others who need extra time to get those details. Your audio presentation can pick up loose ends, significant details the fast learners probably missed and the slow learners didn't understand. The self-starters will prick up their ears and say "I never thought of that" and the spoonfeeders will say in relief "Now I understand." Bridge gapping is a good source of material for the middle part of your lesson.

## FEEDBACK

Now that we've disposed of the middle part of the lesson, let's go back to the first part. How can we involve not only those students who have been with us for a while, but also intrigue the casual listener who has just happened onto our program?

Feedback . . . similar to the telephoned talk show and audience participation format, or more organized feedback taken from previously received written or telephoned comments and questions, brings a sense of immediacy to the listener, of being something more than a passive receptor of material droned at him by an instructor. A teacher who is good in the classroom can usually handle "live" feedback by telephone while the program is on the air. This can have its advantages and disadvantages, dependent to some extent on the nature and extent of the service area. An alternative is material received by phone or mail before the program goes on the air. This has the evident advantage, although lacking the spontaneity of unplanned voices, of permitting the instructor to sift through the material, choosing that which serves his purpose and of editing it to fit into his time slot.

We have talked about feedback, the

"magic genie" of audio. In education, as in audio, feedback can accomplish only so much. By skillful design feedback may accomplish more than one objective at once, maybe several. It just cannot achieve everything. In an audio circuit, you may use multiple loops so that eventually you do achieve a good deal. Such loops are applied simultaneously. But in teaching, feedback applications must be achieved with a time separation for each of the multiple effects. The instructor must be conscious of just what each piece intends to achieve and how.

The feedback of student participation does intrigue the listener, but there has to be a cutoff and other material offered if progress is to be made. The bridging information discussed previously might be used to introduce the meat of the lesson. Then there would be a follow-through with new material. This should be bright and dramatic, using the entertainment capacities of the media to its fullest.

The windup of the lesson should whet the appetite for MORE. "Tune in next week to see if the evil monster devours the beautiful young girl," as a stimulation to new listeners.

Those who are already involved and have purchased the materials for that part of the series will be motivated to hop to their books or cassettes to gather more information.

Hopefully, the students will be so excited about what they are learning, once the section for which they have paid is nearing completion, they will send for the following material in order not to miss anything.

These are but a few ideas of how to use the media for educational programs. Of course, as with feedback, the beautiful part is what's "out there" in your own imagination and skill. ■

### MOVING?

Keep **db** coming without interruption!

Send in your new address *promptly*.

Enclose your old **db** mailing label, too.

Write to:

Eloise Beach, *Circ. Mgr.*  
**db Magazine**  
 1120 Old Country Rd.  
 Plainview, N.Y. 11803

# Now Two Smart Plotter Plug-ins for Our Top Draw-er

## MODEL 2010 LEVEL AND FREQUENCY DETECTOR

The new UREI Model 2010 is the second of a series of plug-in modules for our Model 200 X-Y Plotter. The 2010 module enables the 200 to plot both amplitude and frequency information received from coherent signals such as pre-recorded test tapes, records or other remote signal sources. It features SFD (Smart Frequency Detection) which distinguishes between coherent signals and random voice-type interruptions. The circuit stores the last measured frequency in memory, lifts the pen, and waits for new updated frequency and level information before continuing. It can be synchronized from either the input signal or a different external source for plotting channel separation, head crosstalk, etc.

## MODEL 2000 AUTOMATIC SWEEP FREQUENCY GENERATOR AND RECEIVER

The Model 2000 plug-in module, our first of the series, has an internal sine wave generator and receive circuitry for automatically creating amplitude versus frequency response plots on the UREI Model 200 X-Y Plotter. The Model 2000 features a unique Slope Sense\* circuit which automatically slows the sweep rate when rapid amplitude changes occur, and then resumes its normal rate afterwards.

Both Models 2010 and 2000 plot signals from 20 Hz to 20 kHz on K&E or DIN Audio Response Graph paper with 0.05 db resolution and a dynamic range of over 60 db. Vertical scaling is switchable from centimeters to inches. (UREI quality, of course) Available from your UREI dealer.

**UREI**  
**QUALITY**  
**OF COURSE**


\*patent applied for.



MODEL 2010



MODEL 2000

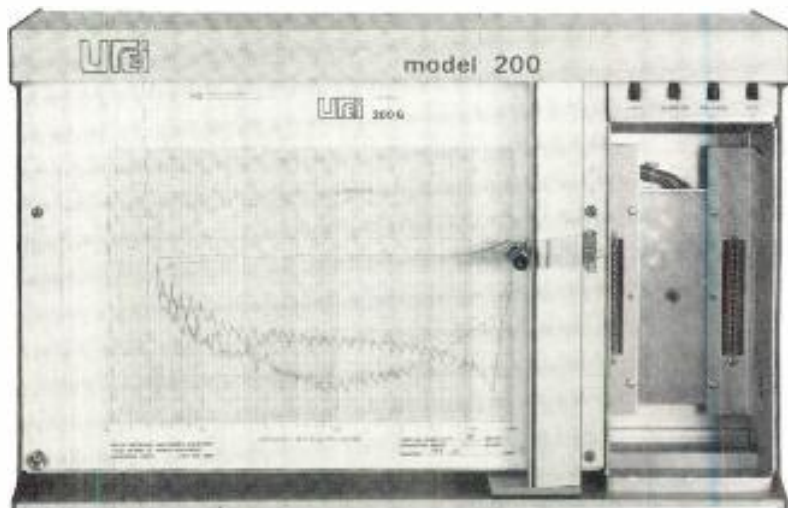

11922 Valerio Street No. Hollywood, California 91605 (213) 764-1500  
 Exclusive export agent: Gotham Export Corporation, New York

Circle 30 on Reader Service Card

• Elsewhere in this issue, our editor reviews the Sound Technology Model 1710A Distortion Analyzer. Or perhaps you may want to pick up Amber Electro Design's Model 4400 Audio Test Set. On the other hand, you may be one of those "basement engineers" who have recently been under discussion here. In that case, big-buck gear such as this is probably out of the question for the time being. And then there's the star-crazed knob jockey who wouldn't know a lissajous pattern from a dBm—the type who regards all test gear as just so much irrelevance.

I don't know what to say to the latter type, but for the former, maybe some words on "getting started in test gear" wouldn't be such a bad idea.

Most routine testing is centered around the tape recorder, and a good test tape is an absolute necessity. Yes, they're expensive and you can't get along without one. Most readers know what to expect from a test tape by

now, although one point may need a little clarification.

## FRINGING

At long wavelengths (i.e., low frequencies), a playback head tends to "read" a wider-than-normal path of the tape passing under it. When playing back a tape that was recorded on the same machine (or on any other machine with the same head configuration), this "fringing" phenomenon has no practical significance. However (there's always a *however*), test tapes are usually produced with uniform flux distribution across the entire tape width. That means even a 2-inch test tape is, in effect, a monster mono tape.

Because of the full track recording format, the test tape may be used on any head configuration within the width of the tape. But at low frequencies, each track of a multi-track (two or more) head responds not only to the fluxivity within the normal track

width, but also reacts to the presence of information in what would ordinarily be the guard bands between each track. The result is an apparent boost in low frequency response of several dB. The exact amount of this boost depends on several factors which vary from one machine (and playback head) to another, and so an accurate correction factor cannot be stated.


So, there's little point to making low frequency playback equalization adjustments while metering abnormally high levels. Save the equalization adjustments until you get around to recording a series of low frequency test tones. Since you will be recording these at the correct track width for your machine, the playback head will not be responding to additional flux on either side of the normal track width. Therefore, you may assume the tape recorder is functioning properly (there aren't any low frequency record controls anyway), and adjust the playback equalization controls for a flat response. Note that this procedure applies to low frequencies only. And, it introduces the subject of the audio frequency signal generator, or oscillator.

## OSCILLATORS

Some consoles have an oscillator built-in, but typically this will have just a few switchable frequencies available. This type of oscillator is sufficient for signal tracing purposes, or for making routine spot checks of tape recorder performance. However, it is not enough for a complete test of your tape recorder's performance. For in between each of the switch-selected frequencies, all sorts of strange dips and peaks may be occurring. So, you really need an oscillator that is capable of sweeping continuously through the entire audio bandwidth if you want to know what's really happening.

A good high impedance voltmeter is also worth having, especially for the basement operation. (Some otherwise-satisfactory recorders have unreliable meters; the ones on a certain fairly popular model are down about 4 dB at 10 kHz, although the machine's actual output level is reasonably flat.) Another point to keep in mind is that a zero reading on a semi-pro tape recorder may not signify a +4 dB output level. Sometimes it does, but just as often it doesn't, and if you are working with two or more machines, you may discover a level discrepancy of perhaps as much as 10 dB during an a/b comparison.

If you have a reliable meter on hand, it's a good idea to check the frequency response of the oscillator before and after plugging it into your console or tape recorder. If there's a significant difference in response, it indicates a potential problem within the

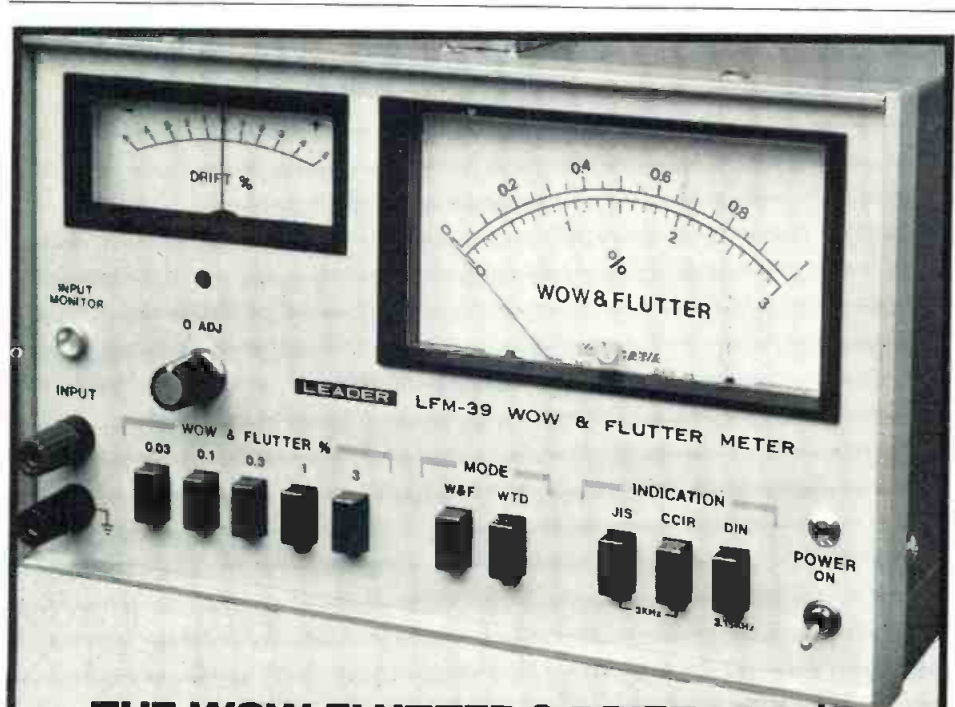

## THE WOW, FLUTTER & DRIFT METER THAT TESTS DIN, JIS & CCIR SPECS!

Measures Center Frequency at 3.0 and 3.15KHz

- Use for tape recorders, turntables, cassettes, and other record/play-back equipment.
- DIN, CCIR & JIS, weighted and unweighted modes.
- Combined wow, flutter, drift readings.
- 5 full scale ranges from 0.03% to 3%.
- $\pm 5\%$  full scale accuracy: 15mV to 10Vrms input voltage range.

\$ 799.95 with accessories.


Tests More... Tests Better... for Less!

**LEADER**  
Instruments Corp

151 Dupont Street, Plainview, N.Y. 11803 (516) 822-9300

West Coast: 7733 Densmore Ave., Van Nuys, Calif. 91406 (213) 989-2760 • In Canada: Omnitrax Ltd., Montreal, Quebec

Circle 23 on Reader Service Card

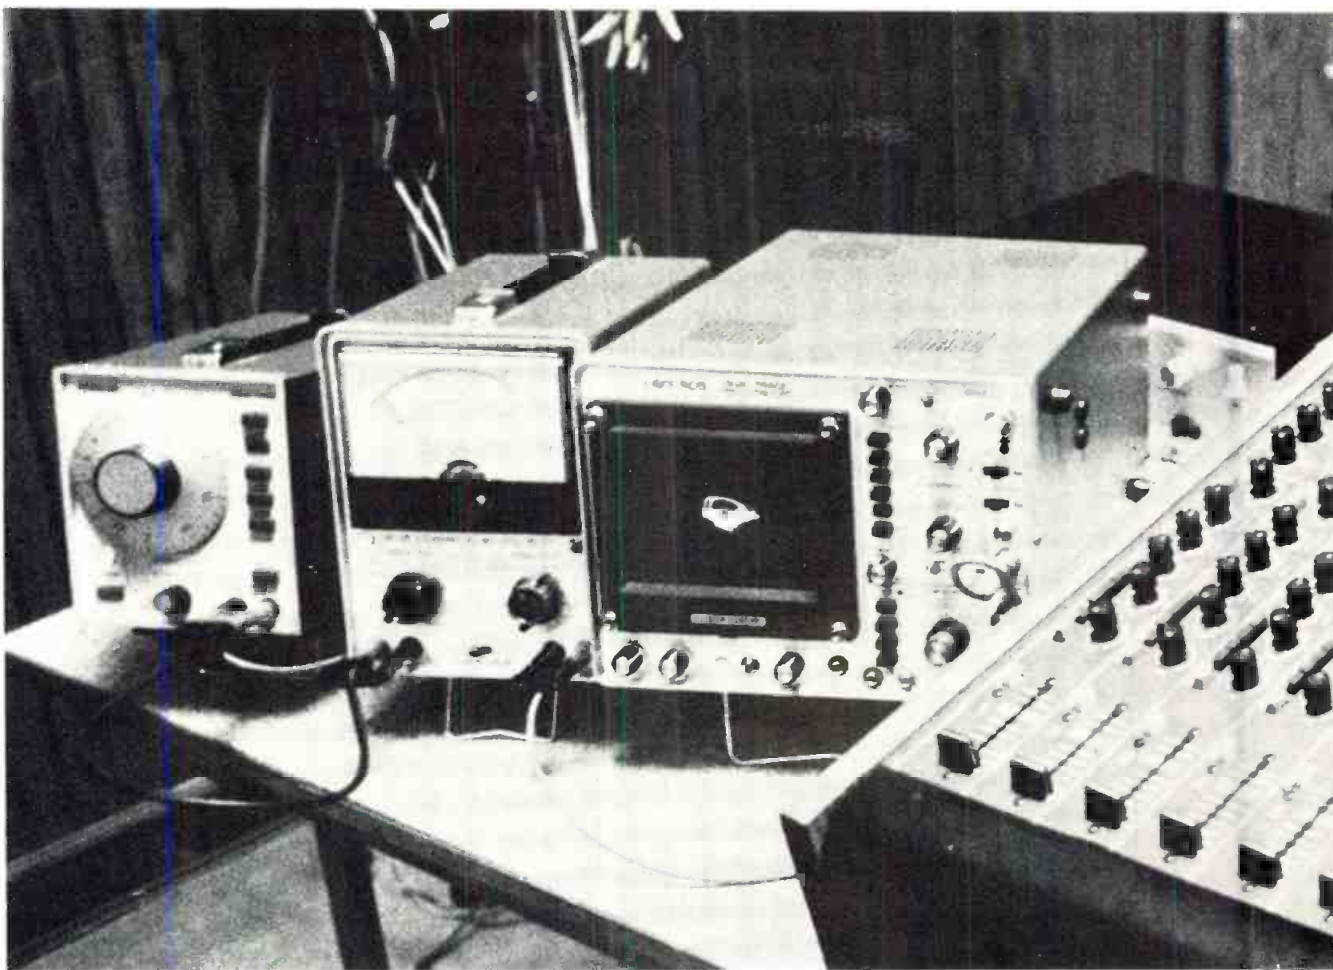

system itself, and this should be corrected before proceeding.

For making azimuth adjustments, a cathode-ray oscilloscope is a valuable tool. However, if one is not available, the outputs of two tracks on the tape recorder may be combined, and shown on one meter, while adjusting the head azimuth for a maximum—or peak—meter deflection at some high frequency, say 7 to 15 kHz. In a typical situation, as azimuth is adjusted, a series of three closely spaced peaks may be observed. To make sure you have selected the correct one, check the response across the entire range of high frequencies. Sharp dips in response indicate an incorrect alignment. Go back and try again. On some test tapes, the tones are sequenced in ascending order, which is a great convenience for azimuth adjustment. For critical alignment, begin at about 1 kHz, and as the tones rise in frequency, make progressively finer adjustments.

With an oscilloscope, set in the X-Y mode, a properly aligned azimuth setting will produce a straight line, running across the scope face at a 45 degree angle. Usually the line runs from lower left to upper right, but verify this by first feeding the same signal to both X and Y inputs, and noting

the orientation of the display. If the line runs from upper left to lower right, make note that this is the proper direction for an on-azimuth signal on your 'scope.

#### PHASE SHIFT

As a tape recorder head is rotated out of azimuth, the resulting phase shift will cause the angled line to widen into an oval, which eventually becomes a full circle when the phase shift reaches 90 degrees. Beyond 90 degrees, the display narrows into an oval again (tilted in the opposite direction) and at 180 degrees, a straight line is once again displayed. However, the line is tilted in the opposite direction from the on-azimuth display, and so the mis-alignment is obvious (providing you remember which way your 'scope is wired).

In observing the 'scope display, remember that phase shifts may be caused by equalization as well as azimuth mis-alignment. Therefore, as azimuth is adjusted, also note the meter readings on the tape recorder. If the high frequency response varies from one track to another, correct the equalization as you proceed.

Once the azimuth/equalization has been properly adjusted, it's a good idea to leave the 'scope across your left and

right monitor outputs. A well-placed center soloist will produce a strong in-phase display on the 'scope. If the left-to-right balance is off a bit, the display will lean towards the vertical or horizontal, depending on the direction of the imbalance. (Usually, left = vertical, right = horizontal.) A good mono-compatible stereo program will produce a "brillo pad" display on the scope, but with practice you will recognize a general in-phase orientation to the display. And, when the display tilts in the out-of-phase direction, you get a visual warning that something is amiss in your setup. Especially when multi-miking drums, pianos or whatever, a strong out-of-phase component may sneak in and cause a lot of grief later during mono playback. Keep an eye on the 'scope, and you'll see the trouble before you hear it.

So far, we've talked about a signal generator, a good meter and a cathode ray oscilloscope (and the test tape of course). It's easy to spend a small fortune on these items. However there are several companies that manufacture a line of test equipment in the budget category. I've had excellent results with the Leader test equipment seen in the photo, and will try to come up with a product review in a future issue. ■

## HEAVY DUTY TAPE



- Designed specifically to reduce print-through in critical studio and broadcast applications, reusable Formula Q15 tape features a long-wearing binder system. The bias-compatible tape can be placed on any machine and used without adjustments. The tape is available in 1, 1½, and 2 mil thicknesses in reel lengths from 525 ft. to 7,200 ft. in bulk.

*Mfr: Capitol Magnetic Products  
Circle 50 on Reader Service Card*

## POWER AMPLIFIER



- 100 watt/channel model 2200 amplifier uses full complementary circuitry throughout, specified at 0.05 per cent thd and i.m., from 250 mW to full rated power over a frequency range of 20 Hz to 20 kHz. The circuitry includes dual-differential inputs, full complementary drivers and output stages. The unit is capable of a 40V/microsecond slew rate. Power output is monitored by an i.e.d. power display, indicating the average power (peak responding) of the amplifier over a range of 20mW to full rated power plus indicating amplifier overload. Plug-in circuit board construction permits unit-to-unit repeatability.

*Mfr: Scientific Audio Electronics Inc.  
Price: \$450.00.*

*Circle 51 on Reader Service Card*


## OPEN REEL TAPE DECK



- Half-track 2-channel stereo or mono format with 15 or 7½ in./sec. speed are available on A-3300SX-2T open reel tape deck. Using a three-motor transport system, the claimed s/n ratio is greater than 67 dB (wtd at 3 per cent thd). Frequency response is 30-26k ( $\pm 3$  dB at 15 in./sec); wow and flutter is reported less than 0.04 per cent wrms at 15 in./sec. Independent left and right channel source/tape selectors determine the signal to be displayed on the vu level averaging meters. A manual cue lever is provided for searching and editing. Other features include separate bias and equalization selectors, independent left and right channel record mode selectors for making mono recordings and dubbing in sound effects from external equipment, individual input level controls enabling the operator to mix microphone and line level signals and a separate output level control for each channel.

*Mfr: TEAC Corporation  
Circle 52 on Reader Service Card*

## DIRECT-DRIVE TURNTABLE

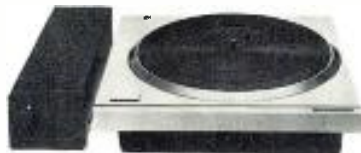

- Quartz-controlled SP-10Mk2 direct drive turntable features a phase-locked servo circuit. The oscillation of the quartz crystal supplies a reference frequency, adjusting the revolution speed to a constant norm, claimed to within  $\pm 0.002$  per cent. Extremely fast opening momentum is claimed; from standstill it takes the platter 0.25 second to reach 33⅓ r.p.m. It requires only 0.3 second to come to a standstill from rated speed. The stylus can be set down on a silent groove between two lp bands at standstill, and when started, the platter will reach rated r.p.m. before the first note is heard. At standstill, part of the braking force remains applied, preventing the platter from being inadvertently rotated and permitting precise cueing. The unit uses solenoid operating controls.

*Mfr: Technics by Panasonic  
Price: \$699.95*

*Circle 53 on Reader Service Card*



## SPLICING TAPE




● General purpose splicing tape Scotch #67 is intended to provide strong splice bonds despite extremes of dynamic stress in bin loop transports during manual splicing of magnetic tapes. It is claimed that splice bonds remain intact under environmental conditions ranging from -30 degrees F to +150 degrees F and at 80 degrees F with 80 per cent relative humidity. Splices are removable as required in bin loop applications. Available boxed or in bulk, in 100 ft. rolls in 7/32, 1/2, 3/4 and 1 in. widths.

*Mfr: 3M Company*

*Price: Varies (7/32 bulk single roll: \$2.65.)*

*Circle 54 on Reader Service Card*

## 8-BUS CONSOLE

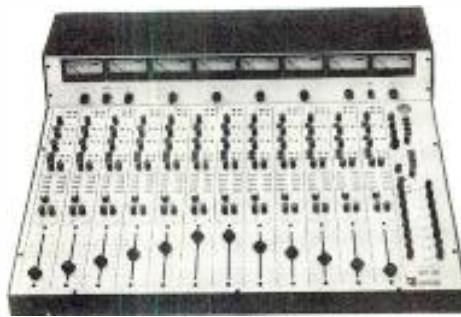


● Each input module on QM-128 8-bus console has solo, mute, two independent echo sends, and two independent cue sends, six frequencies for e.q. on three knobs with an equalizer in/out switch included and a mic/line switch with 15 dB padding on the mic. Also included are plastic faders and panning to the eight busses. The stereo monitor has push button selection of bus, line, or playback. A separate control for control room and studio monitor level is included with additional controls for cue masters and solo, talk-back slates to all eight busses and two cue busses, and to the studio monitor feed.

*Mfr: Quantum Audio Labs, Inc.*

*Price: \$4,300.00.*

*Circle 55 on Reader Service Card*

## HIGH SPEED TAPE DUPLICATOR

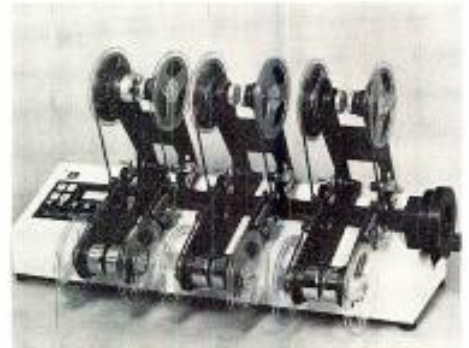

● Five copies can be turned out in four minutes by model 1056 reel-to-reel tap duplicator. The unit uses a single capstan drive and specially designed heads to provide uniform frequency response ( $\pm 0.5$  dB of master from 50 Hz to 15 kHz). Pushbutton transport controls select 30 or 60in/sec. duplicating speed and a fast forward rewind capable of handling a 1200-foot master in 60 seconds. In addition to standard 7 in. reels, model 1056 can be specified for the processing of 10½ in. reels. Operating on 120V 60Hz, model 1056 uses a common capstan drive and standard shaded 4-pole torque motors for spooling.

*Mfr: Garner Industries, Inc.*

*Circle 56 on Reader Service Card*

# TimeWarp™

## TIME DELAY UNIT AND EFFECTS GENERATOR



... for CREATIVE TIME TRANSLATIONS

**TIME WARP** — The only delay line and effects generator offering glitch-free, continuously variable time delay plus POLYTONE™, the automatic generation of harmonically related musical notes, and providing full remote control capability on all functions. Its Extended Tone Memory can hold a note smoothly for almost 30 seconds and the Saturable FM feature provides superb ring modulator effects. From guitar to synthesizer, TIME WARP is terrific.

In addition to these special features, all of the more common effects such as phasing, flanging, tunneling, Doppler shifting, artificial (automatic) double tracking, true vibrato, true chorus, slap-back echo, pitch change and recycling reverberation are also available from TIME WARP.

Complete with internal power supply and remote control connector, TIME WARP occupies only 1¾ inches of rack space and won't cost you the earth. Don't settle for less... in versatility or quality.

Coming soon — A foot pedal interface unit for direct coupling and musician control of TIME WARP with any instrument.



MICMIX Audio Products, Inc.  
9990 Monroe Drive - Suite 222  
Dallas, Texas 75220 (214) 352-3811

Circle 24 on Reader Service Card

(continued)

**REEL RETAINER**

● Lock-down VIF 1000 reel retainer secures both NAB and RETMA reels in place, working with either ¼" or ½" reels on both rack and console-mounted recorders. When used with NAB reels, the retainer can be permanently locked on the shaft. For RETMA reels, the VIF 1000 is locked on the turntable shaft with the aluminum locking nut. Textured surfaces aid in gripping.

*Mfr: VIF International*

*Price: \$13.50.*

*Circle 57 on Reader Service Card*



**FUNCTION GENERATOR**



● Simultaneous sine, triangle, and square wave outputs are featured on Model 12 function generator. The unit handles f.m., frequency shift keying, and remote tone burst. It has external frequency control, vco, d.c. to 1 MHz and selectable function output with continuously adjustable amplitude and d.c. offset. Claimed accuracy is ± 5 per cent, with 200 ppm/°C stability.

*Mfr: Advanced Electronics Corp.*

*Price: Kit: \$79.95 Wired: \$124.95.*

*Circle 60 on Reader Service Card*

**LAVALIER MICROPHONE**

● Tiny SM11 lavalier microphone measures only 1-5/16 in. in diameter, but delivers a frequency response of 50 to 15,000 Hz, optimized for lavalier use. The dynamic omnidirectional mic has an impedance of 150 ohms for connection to microphone inputs rated at 25 to 200 ohms. Accessories include a lavalier cord assembly, a clip-on clasp and a tie-tack assembly with a connector belt clip. The unit weighs 0.28 oz.

*Mfr: Shure Bros.*

*Price: \$57.40.*

*Circle 58 on Reader Service Card*



**HEADPHONE/MICROPHONE**

● Designed particularly for binaural recording and monitoring, Model HM-200E headphone features a matched electret condenser microphone with simulated auricles in the earpieces, permitting hands-free recording. A foam dummy head has screw sockets for tripods and mic stands. A three-plug connection for left and right input and monitor connections permits hookup to a stereo tape recorder. The unit is battery-powered, may be also used for stereo.

*Mfr: JVC America*

*Price: \$80.00.*

*Circle 59 on Reader Service Card*



**STUDIO EQUALIZER**



● Twin-Graphic balanced in/out 600 ohm studio equalizer displays zero-gain input-to-output signal ratios through four l.e.d.s on the front panel. Two separate ten-octave equalization panels, have ±12 dB boost and cut for each octave. Separate equalized signal zero-gain controls are used for each channel, enabling exact balancing of input to output with a +6 dB and -12 dB range. L.e.d.s are used in conjunction with the zero-gain level controls for visual balancing. Front panel pushbuttons select equalized or unequalized output, low and/or high shelving and zero-gain lights. The unit has balanced 600 ohm op-amp input, balanced 600 ohm op-amp output, and switch selection for low or high impedance input for output.

*Mfr: Soundcraftsmen*

*Price: \$550.00.*

*Circle 61 on Reader Service Card*

db March 1977

24

**FREE CATALOG**

**HARD-TO-FIND PRECISION TOOLS**

Lists more than 3000 items: pliers, tweezers, wire strippers, vacuum systems, relay tools, optical equipment, tool kits and cases. Also includes ten pages of useful "Tool Tips" to aid in tool selection.



**JENSEN TOOLS AND ALLOYS**  
4117 N. 44th Street, Phoenix, Ariz. 85018

*Circle 37 on Reader Service Card*

## STEREO COMPRESSOR/LIMITER



● Model 162 compressor/limiter, with strapping for multi-channel tracking, offers true rms level detection with the threshold variable from 10 millivolts to 3 volts. L.e.d. indicators show above and below threshold operation. Compression ratios are variable from 1 to 1 up to infinity. By using the sum of the channel signals as the control voltage, the system maintains proper stereo image location. Four or more channels of operation are achieved through strapping so that a single voltage proportional to the sum of the channels controls all the outputs of two or more of the units. Meters are switchable to read input or output level or gain change over a 60 dB range and zero level may be set anywhere from -10 to +10 dBm. The unit accepts input levels up to +26 dBm and will drive a 600 ohm load at +24 dBm.

Mfr: dbx.

Circle 62 on Reader Service Card

## STEREO CARTRIDGE



● Optimization of tracking and transient ability are offered in the same unit, stereo cartridge model 2002-e. Lightweight, weighing four grams, the cartridge uses an electret transducer that is directly coupled to the beryllium stylus assembly, producing flat response from 5-20,000 Hz  $\pm$  1.5 dB with low distortion at tracking pressures of one gram or less. The unit is independent of tone arm cable capacity, as the result of a passive integrated circuit that eliminates the effect of cable capacity and matches the electret outputs directly to amplifier or receiver inputs.

Mfr: Micro-Acoustics Corp.

Price: \$115.00.

Circle 63 on Reader Service Card

## AUDIO TEST SET




● Consisting of a generator and a receiver, model 4400 test set has a multiplicity of functions. The generator section includes a multi-waveform function generator, pink noise source, log sine wave sweeper, and comb generator, with facilities for tone bursts, a +30 dBm balanced output capability and low distortion. The receiver section contains an autoranging digital level meter reading in dBm rms, an autoranging digital frequency counter, a spectrum analyzer, wave analyzer, band pass, band reject, high pass, low pass filter and a four-channel digital memory to store response plots. The instrument is used with any d.c. oscilloscope to measure level, gain, noise, crosstalk, distortion, frequency, and phase. Four digital memories permit plots of amplitude or phase versus time or frequency. Applications include equalizer and filter measurements, console verification, tape recorder line up, room equalization, production analysis, and transmission line testing.

Mfr: Amber Electro Design, Ltd.

Price: Under \$3,000.

Circle 64 on Reader Service Card

## LED VOLUME METER



● Model LVU-1 consists of a row of ten red leds calibrated in 3 dB steps. The unit features fast response to positive and negative polarity transients and peak holding of 50 msec. to compensate for the integration of vision. Mounting is accomplished by drilling 1/4 in. holes into a 1/8 in. panel and using the provided mounting clips. Options include: 10 or 12 leds; red, yellow, and green leds; mounting bezel: a  $\pm$  15 volt power supply.

Mfr: Lintech Electronics

Price: \$35.00 to \$50.00.

Circle 65 on Reader Service Card


## LOW FREQUENCY HORNS



● Designed for the rugged high volume demands of large area live performances, SR-215 and SR-115 low frequency horns are suitable for applications requiring low frequency response to the 40 Hz region at extremely high levels. These are exponential straight horns with reflex loading for 15 in. woofer drivers; true exponential flare rate is claimed by the manufacturer. A 6 dB down point of 40 Hz or less is permitted. Response is maintained to above 1 kHz to permit crossover to the midrange horn anywhere in the 500 to 800 Hz range. The units are constructed of laminated birch with internal bracing to further control resonance. Inside surfaces are lined with fiberglass and corners are reinforced to withstand on-the-road handling.

Mfr: Forsythe Audio Systems

Circle 66 on Reader Service Card.

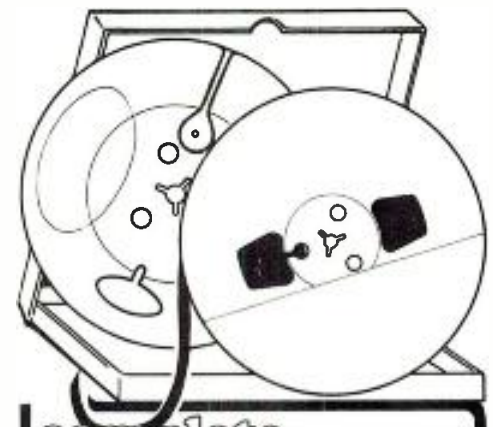

complete  
supplies for  
reel to reel  
audio recording

**TAPE** AMPEX and Scotch  
all professional grades  
on reels or on hubs

**EMPTY REELS** all sizes, widths  
and hub types

**BOXES** for all reels, in various colors  
**LEADER, TIMING- & SPLICING TAPES**

Top Quality Competitive Pricing  
Immediate Shipment

Call or Write for Details/Prices  
**Recording Supply Co.**

DIVISION OF POLYLINE CORP.  
1233 RAND RD. • DES PLAINES, IL 60016  
312/297-0855

Circle 39 on Reader Service Card

WILLIAM H. HALL

# Solving the Reverberation Dilemma

*The ear's sensitivity to reverberation makes paring equipment costs difficult, careful testing of equipment a must.*

LOOKING OVER the reverberation market, one views everything from "space expansion" devices to gold foil models, with equipment costs ranging from about \$100 to more than fifty times that amount. You can't help but ask, is there really *that much* difference in performance between the various manufacturer's equipment at these two extremes? Reverberation equipment seems to group itself in the general price ranges of (a) below \$500, (b) \$500—\$1,000, (c) \$1,000—\$2,000, and (d) over \$2,000. The higher range can easily exceed the cost of the primary recording equipment with which the reverb would be utilized.

Skillful usage can make recordings on budget equipment that are almost unnoticeably different in quality from those done on the most expensive equipment. But when dealing with reverberation equipment, one finds that the cost vs. quality required is not necessarily in proportion to the overall equipment budget, nor does skillful usage compensate for lack of quality. Five thousand dollars' worth of basic recording equipment can make excellent tapes, but reverberation equipment worthy of such tapes will add at least one-fourth more to the investment.

A lot of effort is being spent, even today, by individuals as well as manufacturers on ways to achieve high quality reverberation without spending this apparently disproportionate amount of money. Over the years we have heard of many novel and often rather extensive schemes to try and bypass the requirements for the more expensive reverberation devices, but only a very few of these attempts have been capable of passing the listening test.

## BASIS FOR CRITERIA

The primary problem with any approach is that the

human ear is an extremely sophisticated device and is quite particular about the type of reverberation that it wants to hear. No special talent is required to make a listening test. With very little experience, almost anyone can pass judgment on a reverberation device and will probably find himself in general agreement with others.

This very fact determines the quality required in reverberation, regardless of the cost. It is almost as if poor

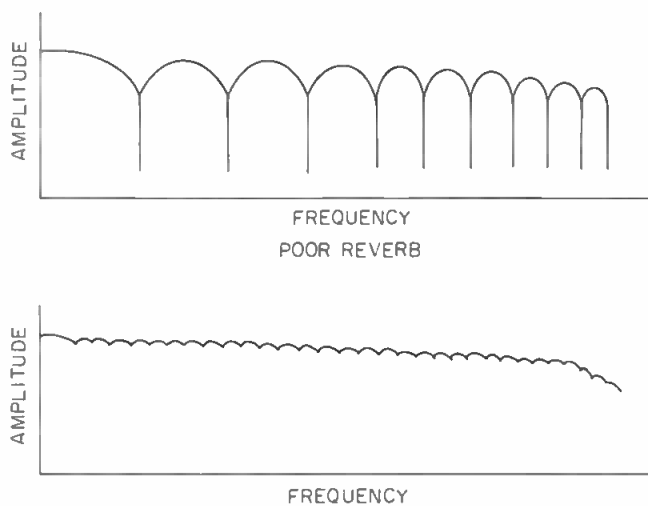


Figure 1. Sine wave sweep frequency test shows comb filter effect.

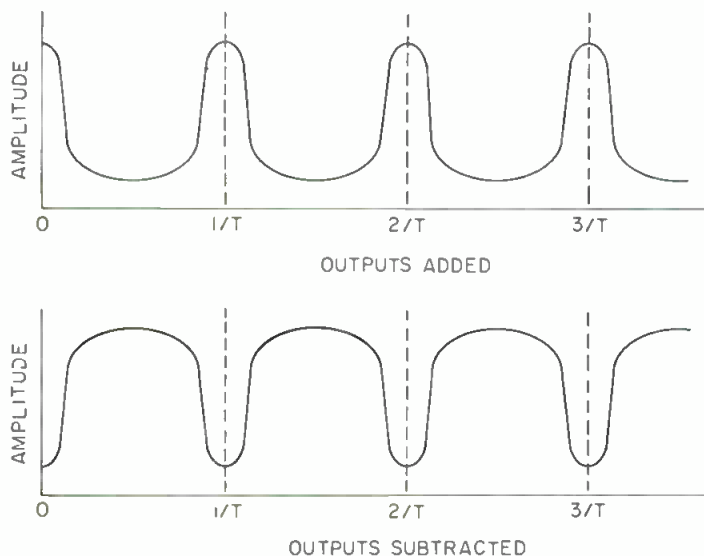


Figure 2. Recycled electronic delay lines have precise periodic amplitude reinforcement or cancellations at harmonics of the fundamental resonant frequency. Fundamental frequency is determined by the reciprocal of the delay time.

reverberation is worse than none at all. Poor reverberation is readily apparent when transient material is involved, or, to put it another way, transient material always requires good reverberation.

To the already diverse product lines of reverberation devices now on the market, there will soon be appearing a group of low priced delay lines which can be recycled and thus form another type of reverberator which is very similar in performance to the recycled tape loop, an elementary setup on the professional tape recorder. From this assortment of electro-mechanical, and now all-electronic, devices when taken in relationship to the sophistication of the human ear, what are the criteria for a reverberation device and how do they equate to money well-spent?

The primary consideration in reverberation is the somewhat elusive quality called *diffusion*. All reverberation devices contain standing waves in their output structure, with the difference being whether these standing waves represent a large or small portion of the total output energy. A poor quality machine will have a coarse comb filter effect, with almost complete cancellation of signal at the comb minima points, while a good reverberator will have a fine comb filter effect and only a very small amount of cancellation at the comb minima points.

### PLOTTING STANDING WAVES

The old technique for plotting out the standing waves in a room or auditorium is very valid for assessing the diffusion capability of an artificial reverberation chamber. It is also a very easy test to perform. To make such a test, slowly (very slowly) sweep the chamber with a sine wave oscillator from about 50 Hz to 5,000 Hz. Count the number of output amplitude variations which occur, as measured with a vu or dBm meter, or plotted on a graphic recorder.

The resulting quantity of maxima points divided by the frequency range covered (in Hz) is referred to as *res-*

*onances per hertz* and provides a strong indication of the chamber's performance qualities. A good reverb will produce close to one, or even more, resonances per Hz, while a poor quality machine will result in at least a magnitude *fewer* resonances per Hz.

FIGURE 1 expresses this concept. A low quality machine will have a very well defined comb filter effect caused by the cancellations due to standing waves in the transmission path(s), resulting in a low figure (usually 0.01 to 0.20) of resonances per Hz. This effect is very well known, although not in those terms, and is responsible for the sound so often discussed and associated with an inexpensive spring reverb. Most people refer to it as "boing," but it is a characteristic property of delay lines, and not necessarily that of the spring itself, which happens to be the transmission medium most often used in electro-mechanical reverberation systems.

Because of this fact, it has been possible to design at least two very good reverberation devices using the basic spring as the transmission medium. One of these spring systems is generally referred to as the *torsional* transmission line system. The other is the Master Room system which utilizes networks of specially designed "springs," with the outputs being essentially summations of numerous interconnected and digitally tuned sections.

### ELECTRONIC REVERBS

Because of its cost, the electronic delay line has not yet achieved the popularity of the more common reverberation device. However, there is probably not a person alive who, having the availability of a digital delay line, has not tried to duplicate some reverberation effect by making the line recycle itself. What is soon discovered, though, is that the recycled delay line is even more "boingy" than its electro-mechanical counterpart. The reason for this rather weird fact is that the electronic line is a precision comb filter and exhibits *no* diffusion. The electro-mechanical device is not as precise in its physical design and therefore has some inherent diffusion which tends to reduce the "boing" properties.

Since diffusion is the name of the game to a very great extent in reverberation, and it is this property which breaks up sound into the multiplicity of random echoes that please the ear, it will take a lot of design effort to make an electronic reverb that is as good as our present electro-mechanical systems. New concepts will have to be developed to provide diffusion in a digital system, since the obvious multi-tapped delay line can sound worse than even the automobile "reverberators" which were popular a few years ago.

There will soon be on the market a formidable array of analog delay line units based on the bucket brigade devices (BBD's). This type of delay line, like its digital counterpart and the electro-mechanical systems, will still have to follow the same set of laws, however, when set for a recycling mode of operation. In the recycling mode, the delay time determines the primary resonance, while the method of feedback determines whether the reflections are odd or even multiples of the primary resonance. Various configurations of these systems are responsible for the "flanger" and other electronic sound modifiers. The comb filter which is formed by a recycled delay line can have two basic modes, depending upon the sign of the output summation. FIGURE 2 illustrates this effect.

The primary resonant frequency is determined by  $F = 1/T$ , where  $T$  is the delay time. A delay time of one millisecond in a delay line would result in a primary resonant frequency of  $F = 1/0.001 = 1,000$  Hz, with additional resonances occurring at all multiples of  $T$  ( $2T$ ,  $3T$ , etc.) to the bandwidth of the system. If the delay line was 50 milliseconds long, the primary resonance would be at 20 Hz.

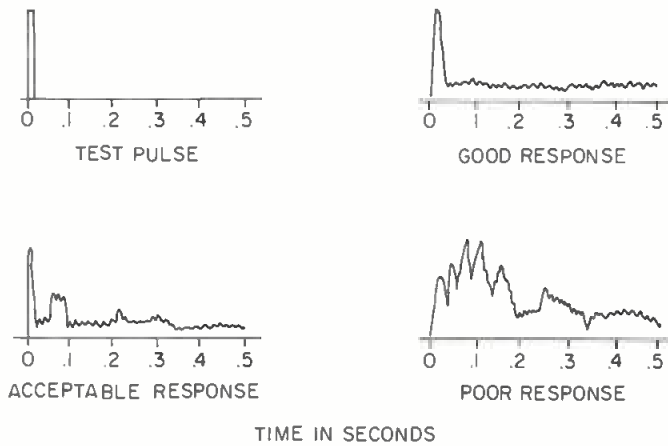


Figure 3. A good reverberation system will have only small variations in amplitude due to standing waves created when tested with a sharp pulse signal. The first 500 msec. of reverberation time are the most significant in this test.

### PULSE TESTING

Any transient in the recycled line can shock excite the system to ring at the primary and/or at harmonic resonance points. These resonances are interpreted as *boing* when the frequency is within the range of approximately 50 Hz to 3,000 Hz, and as *flutter echo* when the resonance is below the lowest frequency that the ear can resolve. It is this property of the basic delay time, not the material used, that has given the simple spring reverb its bad name and sound.

At MICMIX Audio Products, we developed (or at least significantly improved) another technique for room and reverberation device analysis which is similar to radar and sonar technology. With this system, a sharp narrow pulse is transmitted and the resulting echo pattern describes the time domain characteristics of the structure or device being tested.

FIGURE 3 illustrates this system as applied to an auditorium. The test pulse is transmitted and the resulting echoes are displayed on a storage type oscilloscope. The timing pattern displayed is capable of being interpreted as the result of a good or bad reverberation system; the frequency of any trouble points can be located by the  $1/T$  formula. It was from this type of studies that the parameters for the Master Room reverberation chambers were determined.

One interesting aspect regarding these studies of both live rooms and artificial chambers is that all good reverberation systems have a common sound when pulse-tested and monitored aurally. While I cannot readily describe this type of sound in print, it is possible for anyone to become familiar with its character after just a little experience, and thereafter to be able to quickly spot a poor reverberation system. The pulse test also has the ability to shock excite any resonances in the reverberation system which color the resulting echo pattern.

Pulse testers for this purpose are extremely simple devices, FIGURE 4 is a schematic of one circuit using a uni-junction transistor which can be built for just a few dollars' worth of parts and which delivers a very usable pulse with more than adequate amplitude. Care must be taken with this circuit in not using too much amplitude. Because the output has such a low duty cycle (manually operated pushbutton) and a very sharp pulse, it is quite easy to use

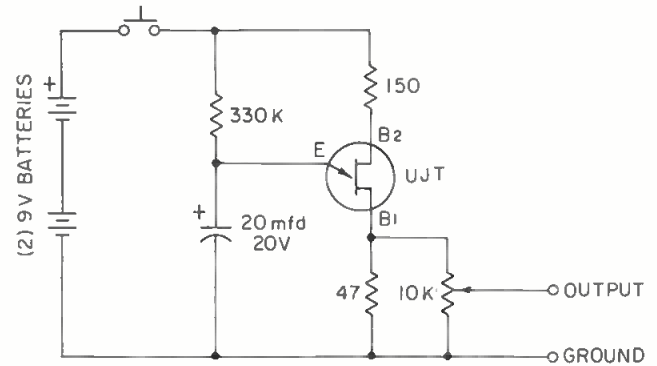


Figure 4. A simple test circuit. Typical UJTs are 2N4851, HEP 210, or ECG 6401. A pair of standard 9-volt transistor batteries in series provides the power supply. The unit is operated by depressing the momentary switch until a pulse occurs. Set the output level low enough to avoid overloading the system being tested.

too much output and overload the input amplifier of the system being tested, whether it is a speech input system or an artificial reverberation device.

Such overloading will totally defeat the purpose of the test. A little experimentation with the pulser will soon give an idea of the proper pulse amplitude. From use of the pulse test, one can learn a substantial amount about reverberation devices and become a good judge of quality rather quickly. As an additional benefit, the pulse tester is an excellent aid in tweaking up EMT and AKG units to obtain best performance.

### APPLYING CRITERIA

The purpose of this article is to try and clear up a little of the witchcraft that has surrounded reverberation devices for a number of years, and to provide a simple test method whereby one can have a standard for comparing not only artificial chambers, but acoustic systems as well.

In the near future there will be many models of electronic delay lines and space expansion type systems. Some no doubt will be very good while others will be of questionable value to the professional. With these, as with existing devices, I would like to reiterate one point; i.e., reverberation is considerably different than a speech input system and the human ear is very sophisticated in the type of reverberation it likes to hear. It pays to evaluate a reverb system before spending one's cold hard cash, and thereby eliminate the oft-repeated lament that what was bought was not satisfactory for the desired effect.

The electronic reverb is somewhat in the future and it is probably safe to say that all of us in the manufacturing business have several systems running in development for evaluation. Other than as a novelty, however, the professional quality all-electronic reverb at a somewhat reasonable price may be quite some time in the future because it is so much more difficult to achieve our present quality in reverberation electronically than it is electro-mechanically. The electro-mechanical (passive) delay line is not a "noise" generator and can be more easily produced on a cost-effective basis to achieve the diffusion that is so necessary for good reverberation quality.

New technology usually wins out in the end, but during the interim it is always wise to let quality be the determining factor in making a decision, rather than novelty or price. ■

# Sound Technology 1710A Distortion Measurement System



*The Sound Technology 1710A analyzer with the intermodulation distortion and auto level set options installed. As shown the total price would be \$3495.00. The breakdown is \$2635 for the basic 1710A, \$210 for the set level option, and \$650 for the intermodulation distortion option.*

**E**SENTIALLY, the Sound Technology 1710A is an all-purpose total harmonic analyzer combined with a pushbutton low-distortion sine wave generator. There are two options available, both of which were on the unit tested: one adds an intermodulation distortion analyzer using the SMPTE method, and the other is an automatic level system.

It's quite easy to become totally dependent on this unit once it is installed in the lab. My lab was falling into obsolescence with distortion analyzers that could not reliably indicate below 0.1 per cent. These days much audio equipment, both consumer and professional, is more than an order of magnitude better.

*(continued)*

## WHAT THE 1710A DOES

As a lab tool, the unit is interfaced via banana plug jacks that are fully balanced and floating (with ground available and no loss of output involved if an unbalanced signal is sent out). The audio generator section is operated by pushbuttons. Three rows cover the full range from 10 Hz to 110 kHz. Those buttons do something else. They shift the filter tracking of the distortion analyzer to the selected frequency so there is no balancing required and a distortion indication on the meter is a matter of seconds.

A separate switch chooses between *fast response* (of the filter system's tracking) and *low distortion*. In the fast response mode, the auto tracking will not achieve the lowest distortion indication, but the results are virtually instantaneously achieved. For testing tape machines, this is as good as needed.

The low distortion setting of the switch takes a bit under five seconds to settle down, but it will achieve the full low distortion the system is capable of. How good is that? The 1710A will reliably indicate distortion within the 10-20,000 Hz range as low as 0.002 per cent. Above that frequency range distortion remains low—to wit: 0.015 per cent at 50 kHz, and at the limit of 110 kHz, total floor distortion was 0.22 per cent. Just how much of this residual is part of the distortion analyzer and how much is part of the generator is hard to say, but most is, I suspect, the generator. In other words, a better generator, if it exists, might show up even better on the analyzer.

The distortion measurement capability is not limited to the use of the internal generator. Any generator or test tape/disc could be measured. To adjust the filter, you must punch up the frequency being fed into the unit. There are two led's under the nomenclature *notch* that will light

if the filter frequency is set too high or low. The objective, when using an outside source, is to get both lights out. Then the notch is correctly set for the frequency at hand.

The unit submitted for test had the option of automatic level set built in. This feature is immensely useful in tape recorder testing where different levels used to determine the saturation point, 3 per cent distortion point, etc., are achieved with no further adjustment of input gain. If the input signal is raised too much, another led will ignite to tell you to reduce the input level switch of the unit.

You can also set input level of the analyzer manually, but there is hardly a reason to do so.

## OTHER FEATURES

The analyzer is also a wide range a.c. voltmeter. As such it can range from full scale indications of 100  $\mu$ V to 100 volts. Accuracy is spaced at 2 per cent full scale.

That scaling on the input switch will also measure noise from full scale indications of -80 dB to +40 dB. In use, the 1710A is patched to the unit under test and its several features make it easier to make quick tests. A push button just to the left of the meter switches the meter between *input* and *generator output*. Just one quick push and you know the voltage of the signal going into the unit under test. Release the button by pushing it again (the button has a position indicator built in) and you are measuring the output of the unit under test.

Another nice feature are two input filters that operate only for distortion or dB ratio testing. A 400 Hz filter cuts everything below that frequency at an 18 dB/octave rate so that 60 Hz hum is over 40 dB down. The second and independent noise switch cuts frequencies above 30 kHz at the same rate. My tests indicate that the filters are exactly correct in their action.

The generator output is derived through a three knob attenuator that will make 10 dB, 1 dB, and 0.1 dB level changes respectively. Source impedance of the generator can be switched between 150 or 600 ohms. With the 600 ohm load on, the attenuators directly indicate dBm.

A vernier knob with a -1, 0, +1 range can be used to further trip the generator output. And finally, a push button will shut off the generator, while maintaining the load impedance, thus making signal-to-noise measurements a matter of quick achievement.

## INTERMODULATION DISTORTION

An available option at the time of ordering adds SMPTE—method i.m. distortion capability to the unit. Merely switching in the section by pushing the correct button will automatically convert the unit. Now, the pre-determined signal is at the generator output. It will be the standard 60 and 7000 Hz, which can be mixed in fixed ratios (switch selected) of 4:1, or 1:1. In addition, variable ratios of the two frequencies can be set manually with a knob anywhere between 1:1 and 100:1.

Tests indicate that reliable intermodulation distortion measurement can be made to a residual floor of 0.0015 per cent when the 4:1 ratio is used.

## SUMMARY

The foregoing covers the bare bones of operation of this system. What is not fully conveyed is the simplicity and utter reliability of the day-to-day use of this system. In particular, I found the automatic level set something that once used, can not be dispensed with. The ability to monitor input and distortion products output separately on meters and 'scopes (via bnc-type connectors) is a further advantage. In fact, I know of no other analyzer that can indicate lower, and operate with such total convenience, and in so compact a package as can the 1710A. L. Z. ■

# Perfect Timing

## console mount clocks and timers

Reliable ESE clocks and timers are now available in compact (2" x 3.7" x 3.6") console mount enclosures with bright easy to read .33" red LED's. Provided with rear solder pins for connection to your own switching or the optional remote connector, 6' cable and pushbutton set. Other options include: BCD Output; Crystal Timebase; 220V-AC-50Hz; and Kit Form.

ES-172 12 Hour Clock	\$134.
ES-174 24 Hour Clock	\$134.
ES-370 100 Min. Up/Down Timer	\$171.
ES-371 100 Min. Up/Down Timer with leverwheel preset	\$267.
ES-570 60 Minute Timer	\$134.
ES-572 12 Hour Clock/Timer	\$160.
ES-574 24 Hour Clock/Timer	\$160.



Write, Wire or Call: (213) 674-3021  
505 1/2 CENTINELA AVENUE • INGLEWOOD, CALIFORNIA 90302



# Tune-up, Preset and Change Scenes. In Real Time.

The Series 20A offers great flexibility in theatre sound mixing, television production, and concert sound reproduction.

The Series 20A is totally modular. That means you can have custom convenience at off-the-shelf prices. Because modularity lets you purchase only the modules you need. As your needs expand, you simply plug in more modules.


And you can customize the arrangement for a particular show. Just plug the modules into any position on the chassis. No tools required.

The Series 20A simplifies your real time operation by allowing you to predetermine program content and distribution. Designed with human engineering in mind, the following features are provided.

- 4 chassis/enclosure sizes: 2½' with 21 module positions, 4' with 31, 5' with 39, and 6' with 47 positions.

**Cetec**  
**audio**

For the educated ear.

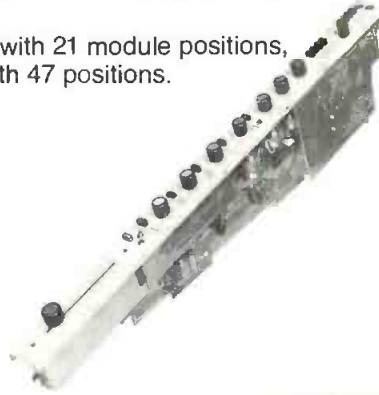

- Up to 37 input channels, each switch selectable for mic and line level signals. Optional switching modules for selection of up to 48 additional remote inputs.
- Presettable (mute) circuit for each of four independent pre-sets. Any input can be assigned to any combination of the four muting circuits. Allows instantaneous changeover from one "scene" to another.
- Two complete foldback buses having level and switching controls at each input, with sub master controls.
- 3-Knob equalization on every input channel—with boost or cut.
- Unique datacable and roadmap configuration to interconnect Cetec's all solid-state printed circuits. Straightforward design provides simple plug-in module positioning.

For further information, contact Cetec Audio

A division of Cetec Corporation.

13035 Saticoy Street

No. Hollywood, CA 91605


Phone: (213) 875-1900 TWX: 9104992669

A division of Cetec Systems LTD.

U.K. Sapphire House, 16 Uxbridge Rd., Ealing,

London W52BP

Phone: 01-579-9145 Telex: 837329

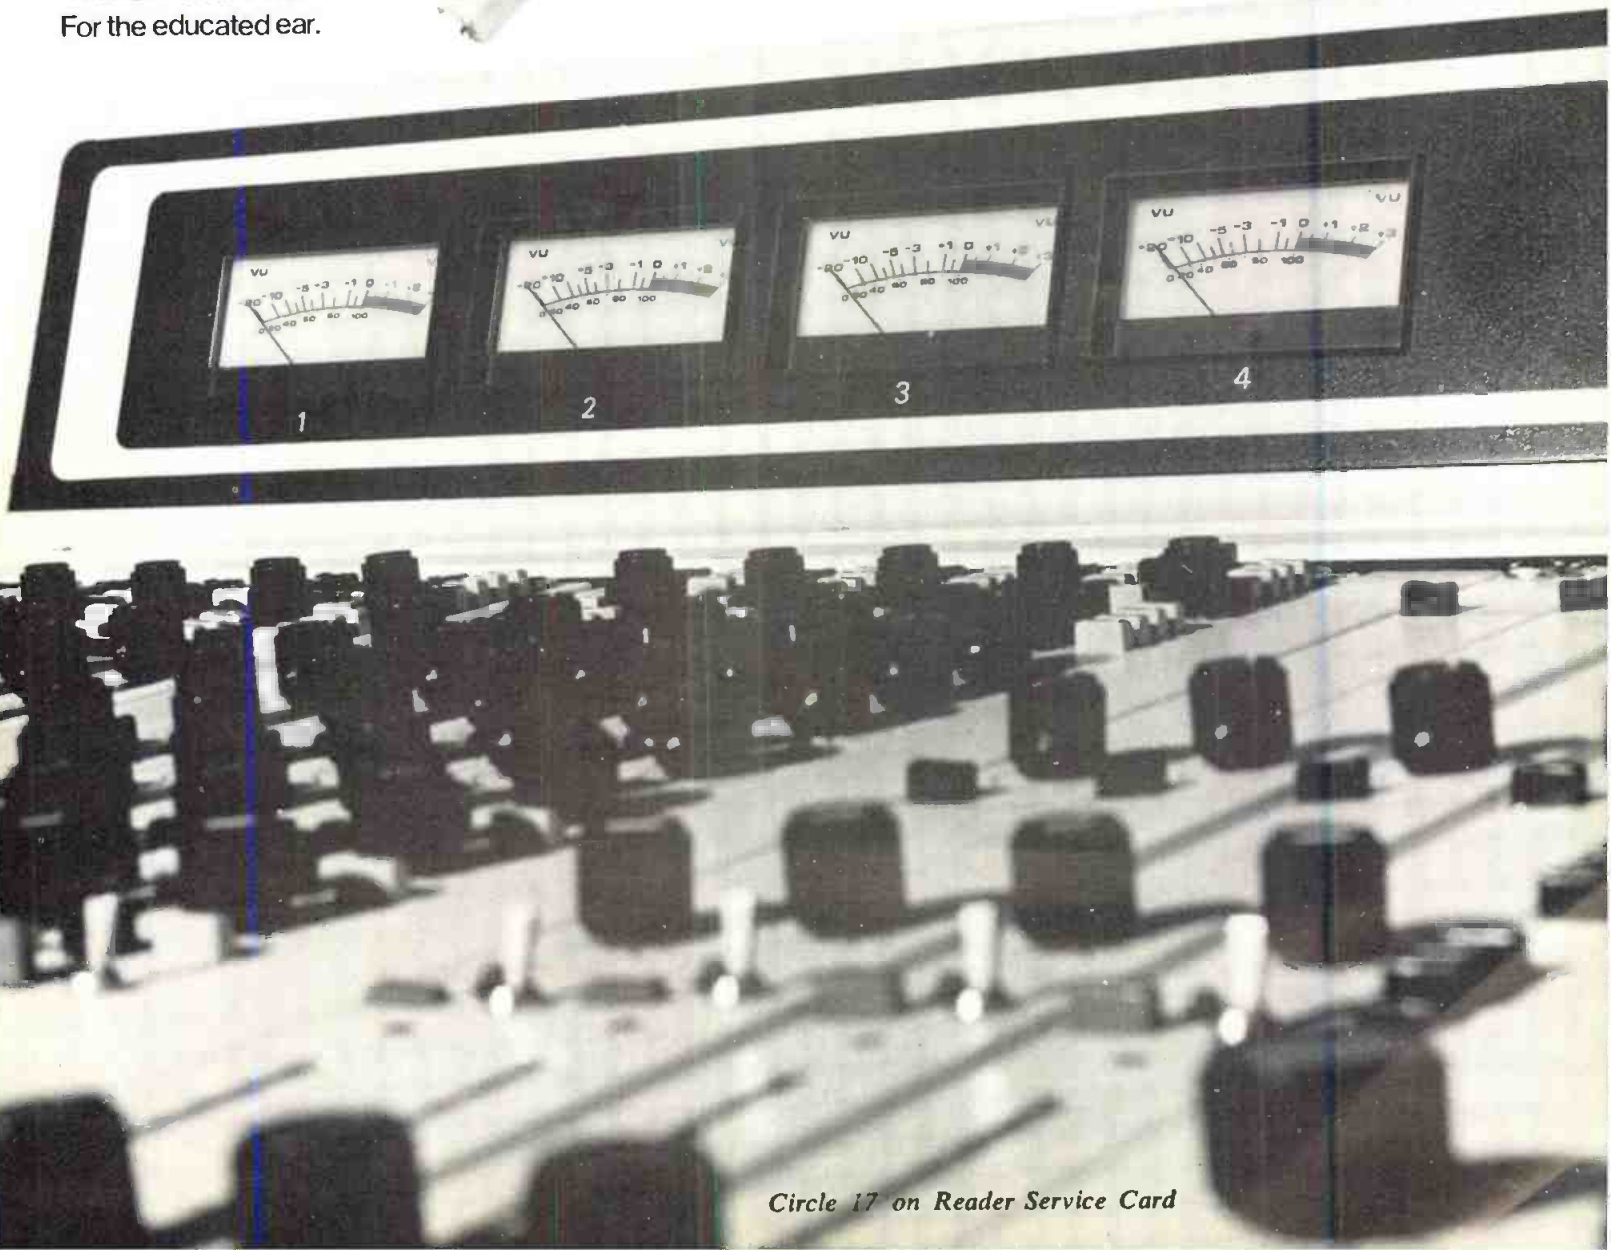

Circle 17 on Reader Service Card

# A Simple Utility Oscillator


*For under \$10, you can create a single frequency low distortion oscillator for quick checks, ringing out lines, and other studio duties.*

**M**OST SIMPLE OSCILLATORS that are small enough to be practical suffer from an overabundance of distortion which precludes their use in many studio applications. The unit described here is small enough to plug directly into a patch panel, (don't forget where you left it); it will deliver a minus 6

vu all day, and do it at less than 0.8 per cent distortion. Typical distortion measurements are in the area of 0.4 per cent. It is possible to get the distortion down to less than 0.1 per cent but it isn't practical to keep it there. The intended purpose was to make a single frequency low distortion oscillator for quick distortion checks, ringing out lines, and other general studio uses.

In designing the device, the parallel tee phase shift oscillator depicted in FIGURE 1 looked like a good place

**Technical Review**  
To Advance Techniques in Acoustical, Electrical and Mechanical Measurement  
No. 2 1976



Request your copy of this new report describing use of an accelerometer as a vibration generator to test high frequency and impulse response of phonograph cartridges. Provides absolute calibration of cartridges up to 50 kHz. Eliminates errors normally encountered in conventional test methods.

**B&K Instruments, Inc.**  
Bruel & Kjaer Precision Instruments  
5111 W. 164th Street, Cleveland, OH 44142 / Phone: (216) 267-4800


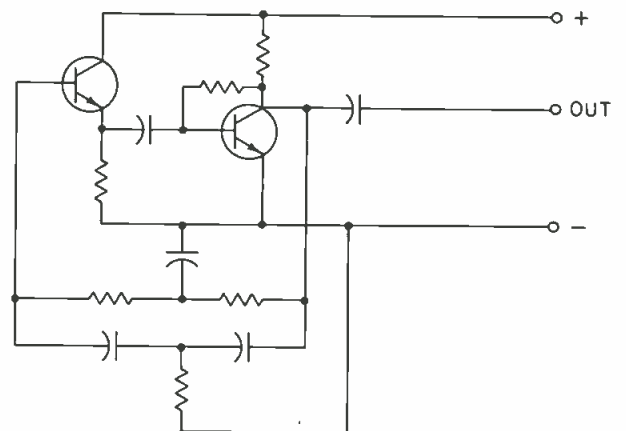


Figure 1. Basic phase shift (parallel tee) oscillator approx. 15 per cent distortion, must see high Z load. (See Figure 4 for values.)



Evert Fruitman is an engineer at KOOL Radio & T.V., in Phoenix, Arizona.

Circle 38 on Reader Service Card

## FREE LITERATURE

### MISLEADING MEASUREMENTS

Loudspeaker measurements are covered in a newsletter, *Keftopics*, volume 1, no. 3. Included are a number of graphs. Mfr: KEF Electronics Ltd.

Circle No. 80 on R. S. Card.

### SUPPRESSORS

Selenium surge suppressors for protection of power semiconductors are described in an 8-page data sheet. Mfr: International Rectifier

Circle No. 81 on R. S. Card.

### PROFESSIONAL PRODUCTS DIRECTORY

Not exactly free, but of importance is Martin Audio's new 48-page Product Directory. Price of \$2.00 will be refunded on the first purchase of \$25.00 or more. Mfr: Martin Audio-Video Corp.

Circle No. 82 on R. S. Card.

### MEASUREMENT COMPUTATION NEWS

Topics discussed in the November/December newsletter are "Full ASCII Code in New Matrix LED Display," "Recorders & CRT Displays for the OEM," and "14.9 Mbytes of Memory for HP 9825A." Mfr: Hewlett-Packard.

Circle No. 83 on R. S. Card.

### CUSTOM AUDIO CONSOLES

A booklist detailing information on the BC-50 audio system, informs the user how to custom design his own console. Mfr: RCA

Circle No. 84 on R. S. Card.

### ELECTRONIC PARTS & EQUIPMENT

An extensive 210-page booklet lists wire, cable, solid state devices, test equipment, resistors, trimmers and potentiometers, transformers, switches, timers, connectors, relays, tools, capacitors, solar energy products, CB test equipments, and other electronic parts. Included is an index of manufacturers and their products. Free to readers of *db*. Mfr: Allied Electronics.

Circle No. 85 on R. S. Card.

## Copies of *db*

Copies of all issues of *db*—The Sound Engineering Magazine starting with the November 1967 issue are now available on 35 mm. microfilm. For further information or to place your order please write directly to:

University Microfilm, Inc.  
300 North Zeeb Road  
Ann Arbor, Michigan 48106

# KLARK-TEKNIK EQUALS THE SOUND OF TODAY

*Up until now, whether you tried to equalize your control room or contour your sound system for a concert hall, the end result was an increase in distortion. That was yesterday. Klark-Teknik equalizers are built for today, for tomorrow. Uncompromised. Unequaled. If your livelihood depends on good clean sound, depend on us. After all, if you're using yesterday's equipment, will you be ready for tomorrow?*

#### SPECIFICATIONS:

Input Impedance: Unbalanced, 10K ohms nominal.

Output Impedance: Unbalanced, less than 10 ohms, short circuit protected.

Operating Level: -20 dBm to +24 dBm; input protection 60V RMS.

Center Frequency Accuracy:  $\pm 2\%$ .


Calibration Accuracy:  $\pm 0.5$  dB.

Frequency Response (controls flat):  $\pm 0.5$  dB : 20Hz to 20kHz.

Output Clipping Point: +22 dBm into 600 ohms load.

Distortion: Less than 0.01% ... 1kHz at +4 dBm into a 600 ohm load;  
less than 0.05% ... 20Hz to 20kHz at +18 dBm into a 600 ohm load.

Equivalent Input Noise: Less than -90 dBm unweighted, 20Hz to 20kHz.

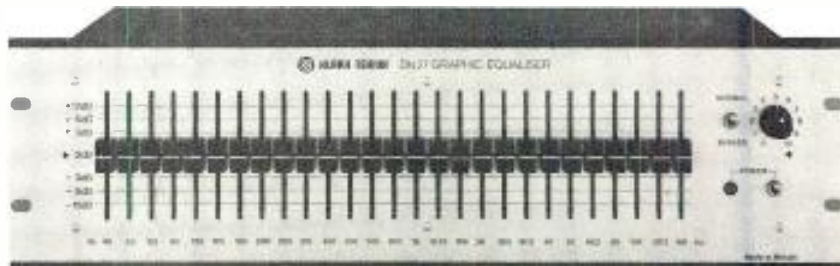

# KLARK-TEKNIK

# THE SOUND OF TODAY

For more information write or call:

Hammond Industries Inc., Klark-Teknik Division  
155 Michael Drive, Syosset, New York 11791 (516) 364-1900

Circle 29 on Reader Service Card


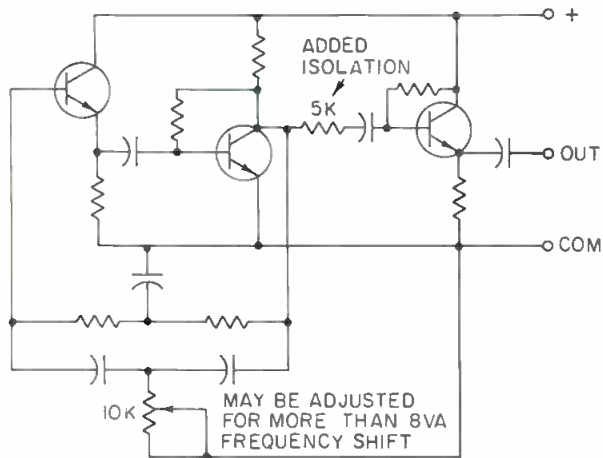


Figure 2. Basic phase shift oscillator with emitter follower. Will drive medium Z load. May be adjusted for more than 8 VA frequency shift.

to begin since it was supposed to be fairly stable and have a reasonable level of distortion. Before the stability or distortion could be measured, it was necessary to reduce the output impedance to a usable level because any change in load resistance at the collector of  $Q_2$  shifted the frequency. This was neatly resolved by using an emitter

follower for isolation. (A J fet would have been better, but wasn't handy when this was put together.)

The next thing that became evident was the fact that there was about 18 per cent distortion in the 3-stage system. The usual quick cure-all consisting of bias and voltage juggling didn't do enough, and a mathematical analysis

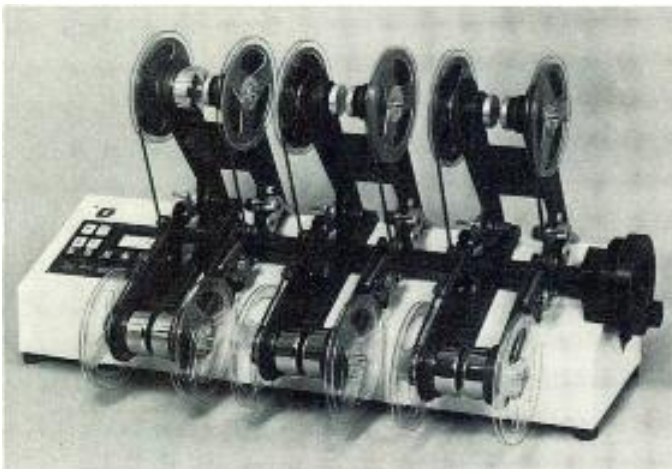

## The fast, sure way to professional quality dubs

Garner Model 1056 is the professional's answer to low-cost, high-quality, fast dubbing. Here's why: Five 1200' copies in four minutes. Single capstan drive provides constant speed. Solid-state electronics and custom-made head guarantee uniform frequency response ( $\pm 1$  db max. of master from 50 Hz to 15 KHz). 30 or 60 ips. Rewinds in 60 seconds. Built to last for years.

Garner Model 1056 is the best duplicator buy today. Costs less than half of some competitors. We'd like to prove to you just how good it is. Write or call today for a brochure and specifications.



**GARNER INDUSTRIES**  
4200 N. 48th St. - Lincoln, NE 68504 - 402-464-5911

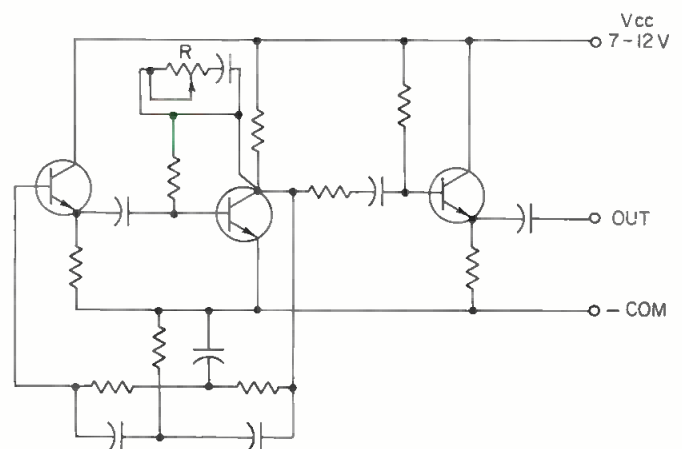


Figure 3. Low distortion oscillator with negative feedback, suitable for use with fixed voltage supply. R is adjusted for low distortion.

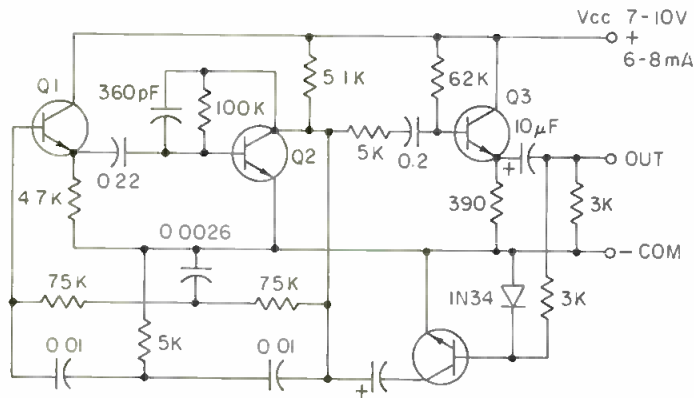


Figure 4. Low distortion oscillator with negative feedback and agc approx. 1 kHz. For balanced output use MT 26FB. 2N2926 may be used for Q<sub>1</sub>-4. 2N1171, 2N2102, 2N3053.

wasn't all that practical or helpful either


If a balanced output is required, it is a simple matter to add a small 1:1 transformer. However, there have been no difficulties encountered in using the units without a transformer at studio or transmitter.

The values shown in the diagrams are those that were

sive utility oscillator with long battery life, reasonable frequency stability, and low distortion. ■

#### REFERENCE


1. Terman, F. E. *Radio Engineers' Handbook*, McGraw-Hill, New York, 1943.

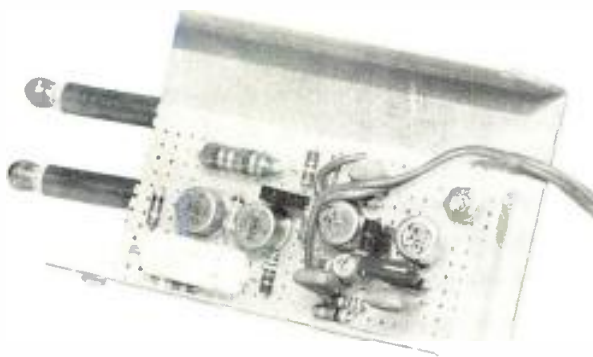

actually used; standard values will work equally well. It will probably cost less than \$10.00 to build one of these if all of the parts (except the transformer) are purchased new.

The net result of this effort has been a small, inexpen-

## Wipe tapes clean in record time.

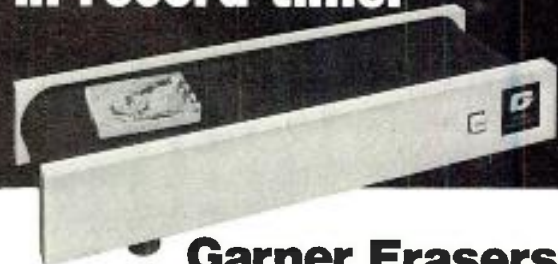

### Garner Erasers

provide clean erasures in only four seconds—with no noise residue. Tapes are wiped cleaner than new. Our simple, safe, continuous belt operation handles all sizes of reels, cartridges and cassettes from 10½" on down.

**Garner Erasers** are now fulfilling the exacting requirements of many major organizations around the world... yet are so low priced that the smallest studio or station can afford one.

#### User reports...

"It is a big improvement over what we used to use, or anything else on the market today."

— Ric Hammond  
KNX Radio (CBS)  
Hollywood, Calif.



See us at the NAB Show  
at Booth 616 (Shorham)

**GARNER INDUSTRIES**

4200 N. 48th St., Lincoln, NE 68504  
Phone: 402-464-5911

# The New Yorkers Who Hustle the Wind.



Street life in a metropolitan area often inspires genius. And that genius can be funneled two ways—good or bad.

The 11th Street Movement in Manhattan's Lower East Side has funneled their genius on the good side with a unique energy saving project involving windmills and solar panels.

This project is just part of the Emergency Energy Conservation Program operated by the Community Services Administration. CSA has established many demonstration programs designed to find new and better ways to help the poor and elderly cope with what for them is a continuing energy crisis.

The program has a broad base, covering everything from development of low cost solar heating and wind generators to experiments with energy conserving farming technologies.

But helping people help themselves isn't an easy task. Simply put, it demands community support—Your support and the support of local and state governments.

If you think this effort is worthwhile, take action, contact your local Community Action Agency or Community Services Administration Washington, D.C. 20506.

There are thousands of people who want to help themselves. Like the 11th Street Movement—they learned how to catch the wind, so they'll no longer be a victim of the elements.



Closing date is the fifteenth of the second month preceding the date of issue.

Send copies to: Classified Ad Dept.

db THE SOUND ENGINEERING MAGAZINE

1120 Old Country Road, Plainview, New York 11803

Rates are 50¢ a word for commercial advertisements.

Frequency discounts: 3 times, 10%; 6 times, 20%; 12 times, 33%.

db Box number: \$1.00 per issue.

All classified ads must be prepaid. Frequency discount advertisements are to be prepaid in advance.

## FOR SALE

**STUDIO SOUND**—Europe's leading professional magazine. Back issues available from July '73 through June '75. \$1 each, postpaid. **3P Recording, P.O. Box 99569, San Francisco, Ca. 94109.**

**BURWEN PRO PRODUCTS:** Model 1100, Model 1500A, Model 1500D, dynamic noise filters. Model SP 5200 stereo pre-amp. New units—below cost. **J. B. Parent Co., 5188 Wedgewood Rd., Medina, Ohio 44256. (216) 725-8871.**

**PROFESSIONAL SOUND COMPONENTS** from Crown, TAPCO, Soundcraft, Eventide, Community, dbx, Gauss, Soundcraftsmen, Spider/Peavey, Sound Workshop, Neumann, and many more. Hear it all at **Gary Gand Music, 172 Skokie Valley Rd., Highland Park, Illinois 60035. (312) 831-3080.**

**CUSTOM CROSSOVER NETWORKS** to your specifications; a few or production quantities. Power capacities to thousands of watts; inductors and capacitors available separately; specify your needs for rapid quotation. Also, **PIEZOELECTRIC TWEETERS**—send for data sheet and price schedules. **TSR ENGINEERING, 5146 W. Imperial, Los Angeles, Ca. 90045. (213) 776-6057.**

**MEASURE REVERB TIME IN REAL TIME**—instantly! New, easy-to-use RT-60 delivers precise, instant real time digital readout. Eliminates chart recorder analysis. Only \$460. Write: **Communications Company, Inc., 3490 Noel St., San Diego, Ca. 92110.**

**ARP SYNTHESIZERS:** Strlngs, \$1,385; 2600, \$2,190; Axxe, \$700; Prosoloist, \$875, Odyssey, \$1,165. **Dickstein Distributing, 1120 Quincy, Scranton, Pa. 18510.**

**FOR SALE:** 24-channel sound reinforcement mixer; 100 ft. snake; balanced input; 3-band eq.; 3 submixers; monitor; echo solo. **BC & G Enterprises, P.O. Box 1036, Littleton, Colorado 80160. (303) 751-5991.**

**DUPLICATOR REPAIR CENTER** for all brands of in-cassette duplicators. Factory-trained technicians. Work warranted. Also big selection of new and used duplicators. **Tape and Production Equipment Company, 2065 Peachtree Industrial Court, Atlanta, Ga. 30341.**

A FEW competitively priced used Revox A77 and A700 decks available. Completely reconditioned by Revox, virtually indistinguishable from new and have the standard Revox 90-day warranty for rebuilt machines. Satisfaction guaranteed. Write requirements to **ESSI, Box 854, Hicksville, N.Y. 11802. (516) 921-2620.**

### AUDIO and VIDEO

*On a Professional Level*

Lebow Labs specializes in equipment, sales, systems engineering, and installation—full service and demonstration facilities in-house. We represent over 200 manufacturers of professional and semi-professional equipment for recording, broadcast, sound reinforcement, and commercial sound. Call or write for information and pricing (attention Peter Engel).

**LEBOW LABS, INC.**  
424 Cambridge St.  
Allston (Boston), Mass. 02134  
(617) 782-0600

### NAGY SHEAR-TYPE TAPE SPLICERS

FOR CASSETTE ¼ & ½ IN. TAPES

- HAND-CRAFTED
- FIELD PROVEN
- FAST, ACCURATE
- SELF-SHARPENING



**NRPD Box 289 McLean, Va. 22101**

URIE, Sennheiser, Crown, Emillar, Cetec, Yamaha, Otari, Shure, AKG, etc.

electro-acoustic  
systems

P.O. Drawer 1923 150 N. Hull St.  
Athens, Ga. 30601 (404) 353-1283

**BI-AMPING** is the best. Use the new "Quanics" 18 dB/oct. X-over. It's easier and works better than the others. Write and find out how today. **Quanics, 103 N. 143rd, Seattle, Wa. 98133.**

**CASSETTES AND REEL TAPES**, bottom prices. Name brands or custom-loaded with Scotch or BASF. Super mastering computer cassettes loaded with AGFA-GAVAERT. Prepaid shipments. Duplicators, accessories, supplies. Write **Stanford International, Box 609D, San Carlos, Ca. 94070.**

**AMPEX TAPE.** Ampex Audio studio mastering tapes; 631-641, 406-407, and "Grand Master" in stock for immediate shipment; ¼", 1" and 2"; factory fresh. Best prices. **Techniarts, 8555 Fenton St., Silver Spring, Md. 20910. (301) 585-1118.**

**TEST RECORD** for equalizing stereo systems. Helps you sell equalizers and installation services. Pink noise in ⅓ octave bands, type QR-2011-1 @ \$20. Used with precision sound level meter or B & K 2219S. **B&K Instruments, Inc., 5111 W. 164th St., Cleveland, Ohio 44142.**

**AUDIOARTS ENGINEERING** parametric equalizer, electronic crossover, disco mixer, stage mixers. **Audioarts Engineering, 286 Downs Rd., Bethany, Conn. 06525.**

**ONE STOP  
FOR ALL YOUR PROFESSIONAL  
AUDIO REQUIREMENTS  
BOTTOM LINE ORIENTED  
F. T. C. BREWER CO.**  
P.O. Box 8057, Pensacola, Fla. 32505

## FOR SALE

REELS AND BOXES 5" and 7" large and small hubs; heavy duty white boxes. **W-M Sales, 1118 Dula Circle, Duncanville, Texas 75116. (214) 296-2773.**

THE RESONATOR is more than a reverb. Designed for use with any console, including Tascam. \$359.00. **Dyma, Box 1697, Taos, N.M. 87571.**


DYNACO RACK MOUNTS for all Dynaco preamps, tuners, integrated amps. \$24.95 postpaid in U.S., \$22.50 in lots of three. **Audio by Zimet, 1038 Northern Blvd., Roslyn, N.Y. 11576. (516) 621-0138.**

NEW YORK'S LEADING DEALER specializing in semi-pro and professional recording and p.a. equipment. Teac, Tascam, Sound Workshop, Nakamichi, dbx, MXR, Dynaco, Ads, Frazier, Eventide, Electro-Voice, Shure, Scotch, Maxell, Otari, Ampex, and more. We go both ways: lowest prices in sealed factory cartons, or complete laboratory check-out and installation. All equipment on display. **AUDIO BY ZIMET, 1038 Northern Blvd., Roslyn, L.I., New York 11576. (516) 621-0138.**

TEXAS STUDIO SUPPLY. Lowest prices anywhere! dbx, Sennheiser, Speck, TAPCO, etc. Write for list. **2036 Pasket, Houston, Texas 77092.**

AMPEX 300, 352, 400, 450 USERS—for greater S/N ratio, replace first playback stage 12SJ7 with our plug-in transistor preamp. For specifications, write **VIF International, Box 1555, Mountain View, Ca. 94042. (408) 739-9740.**

MCI 24-TRACK recording console with producer's desk; matching equipment rack; plus extras. \$19,500. **(312) 225-2110, Paul.**

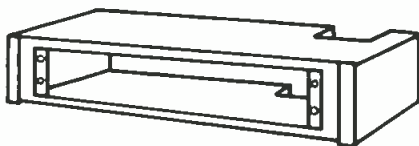

### Scully 280 add-ons . . .

Accepts a pair of Dolby 361s or any 19" x 3 1/2" electronic panel. Only \$49.95 FOB Bridgeport. Send check with order.

### Rus Lang Corporation

247 Ash St., Bridgeport, CT 06605  
Telephone: 203 384 1266

DECOURSEY ACTIVE ELECTRONIC CROSSOVERS. Model 110 dividing network; complete with regulated power supply, for bi-amp, tri-amp, or quad-amp. Custom assembled to meet your specifications. Monaural, stereo, or with derived third channel. Plug-in Butterworth (maximally flat) filters; 6, 12 or 18 dB per octave at any desired frequency. OPTIONS: Summer for single woofer systems, VLF hi-pass filters for elimination of subsonic noise, derived third channel. FOR OEM OR HOME ASSEMBLERS: Model 500 or 600 dual filters. Regulated power supplies. Write for new brochure. **DeCoursey Engineering Laboratory, 11828 Jefferson Blvd., Culver City, Ca. 90230. (213) 397-9668.**

3M M79's, 16-, 8-, 4-, and 2-track; Helios recording consoles; Tascam 80-8's and 25-2's; dbx n-r; AKG reverb; E-V, Shure, Sennheiser, & AKG microphones; Crown amplifiers, overstocked. Call Ben today at **Rowton Professional Audio, Route 4, Box 5, Paducah, Ky. 42001. (502) 898-6203.**

AMPEX, SCULLY, TASCAM, all major professional audio lines. Top dollar trade-ins, 15 minutes George Washington Bridge. **Professional Audio Video Corporation, 342 Main St., Paterson, N.J. 07505. (201) 523-3333.**

MCI 528 RECORDING DESK, perfect condition, factory maintained, custom meter panel w/phase meter. \$46,000. **Criteria Recording Studios, 1755 N.E. 149th St., Miami, Fla. 33181. (305) 947-5611.**

TRACKS!! The complete semi-pro recording center. Get our low prices on Tascam, TEAC, Neotek, Multi-Track, dbx, MXR Pro, Shure, BGW, Tapco and many others. Complete studio packages available. Tracks!! from **DJ's Music Ltd., 1401 Blanchan, La Grange Park, IL 60525. (312) 354-5666.**

### DISCOVER A NEW DIMENSION IN SOUNDS THROUGH FREQUENCY SHIFTERS

Featuring professional models 735 and 750 Bode Frequency Shifters for creative sound production, and anti-feedback model 741 for p.a. systems. Also featuring POLYFUSION synthesizer modules and systems. For details contact:

**Harald Bode  
BODE SOUND COMPANY  
1344 Abington Pl.,  
N. Tonawanda, N.Y. 14120  
(716) 692-1670**

RACK LABS STEREO active crossovers and 40 Hz hi-pass filters for hi fi or p.a. Write **Rack Laboratories, 136 Park St., New Haven, Conn. 06511.**

AST: THE PROFESSIONAL SOUND STORE. Full line of ALTEC and CROWN professional audio, commercial, and musical sound equipment; GAUSS and CERWIN-VEGA speakers; factory authorized service on most speakers. Large stock of ALTEC replacement diaphragms available. **AST, 281 Church St., New York, N.Y. 10013. (212) 226-7781.**

FOR SALE: MCI JH-416 recording console, 16-in/16-out, wired for 24-in/out, excellent condition, \$15,000 or best offer. AKG BX-20E stereo reverb, \$2,500 or best offer. **(614) 663-2544.**

EDCOR PM-1 wireless mic and St-3 "Sensatuner," excellent condition, \$375 or best offer. Two Sennheiser cardioid condenser microphones, MKH-406U, 48 volt Phantom version, mint condition, \$750 or best offer. **David Satz, (617) 492-2263.**

THE LIBRARY . . . Sound effects recorded in STEREO using Dolby throughout. Over 350 effects on ten discs. \$100.00. Write **The Library, P.O. Box 18145, Denver, Colo. 80218.**

AUTHORIZED AMPEX sales and service; electrical/mechanical manufacturing and design of studio equipment; motor rebuilding. **F. R. Dickinson, Jr., Inc., P.O. Box 547, Bloomfield, N.J. 07003. (201) 429-8996.**

CROWN INTERNATIONAL. Complete repair, overhaul, and rebuilding service for current and early model Crown tape recorders and amplifiers. New and reconditioned recorders in stock for immediate delivery. Used Crown recorders purchased and accepted for trade in. **TECHNIARTS, 8555 Fenton St., Silver Spring, Md. 20910. (301) 585-1118.**

**FREE CATALOG & AUDIO APPLICATIONS**



CONSOLES  
KITS & WIRED  
AMPLIFIERS  
MIC, EQ, ACM,  
LINE, TAPE, DISC,  
POWER  
OSCILLATORS  
AUDIO  
TAPE BIAS  
POWER SUPPLIES

**OPAMP LABS, INC.**  
1033 N. SYCAMORE AVE.  
LOS ANGELES, CALIF. 90028  
(213) 934-3546



FREE MUSIC INDUSTRY CATALOG of the most comprehensive list of entertainment publications ever compiled. Write: Talent & Booking, Dept. db-1, P.O. Box 3030, Los Angeles, Ca. 90028 or call toll free (800) 421-4100.

FOR SALE: R-R DUPLICATOR. Mint condition Infonics RR-2; makes 3 copies at 30 in./sec.; complete; \$800.00. Cook Consultants, Inc. 2510 SW Third Ave., Ft. Lauderdale, Fla. 33315.

FOR SALE: PRESTO R-11 professional tape recorder; 7½/15 in./sec.; \$300.00. (212) OR 4-3060.

CLASSES IN MUSIC RECORDING, record production, publishing, disc mastering, film recording, taught by famous engineers and producers; held in 16/24-track recording studios. Contact: University of Sound Arts, 2040 Ave. of the Stars, Suite 400, Century City, Ca., 90067. (213) 553-4742.

BIGGIES SELLS FOR LESS. SP-10MK11, \$594.96. Shure M-67 mixer, \$160.85. Revox A77, \$815.15. All new, fully guaranteed. Top Brands for Less. Biggie's Discount Audio. P.O. Box 1708, Phoenix, Arizona 85001. (602) 271-9397.


MCI JH-110 2-track w/mono head assembly; return to zero; cabinet; less than 100 hours. Thompson CSF 4440A Audimax, like new. \$575. Cooper Time Cube, make offer. UREI 1176LN limiter, \$385. Fisher-Burke. (602) 257-0225.

ELECTRO-VOICE SENTRY PRODUCTS: In stock—Sentry IV-B, Sentry III, and Sentry V monitor loudspeaker systems for professional monitoring and sound reinforcement. Immediate air freight shipment to any N. American destination. Florida dealer inquiries invited. National Sound Company, Inc. Ft. Lauderdale, Florida. (305) 462-6862.

TECHNIARTS, professional audio equipment: AKG, Ampex, Crown International, dbx, Malatchi, Orban Parasound, Sescam, in stock. Professional audio services: audio and acoustical analysis, narrow band equalization, reverberation time, frequency response, and noise level measurements, broadcast and recording systems design, fabrication, and installation. TECHNIARTS, 8555 Fenton St., Silver Spring, Md. 20910. (301) 585-1118.

AMPEX 354. \$950.00. (305) 299-1299.

3M 4-TRACK, 15-30 i.p.s., \$3,900; phase shifter, \$190.00; VSO, \$400.00; 2 Studer A-80 electronics, \$800 each; AKG-BX reverb, \$2,500; J.B.L. 4350 speakers, \$1,050.00 (213) 461-3717, ask for Brian.



IMMEDIATE  
DELIVERY

ALTEC  
604E

The all-time studio monitoring favorite is still available . . . brand new and factory fresh from Audiotechniques for only \$345 each, prepaid, and that includes shipping. Order 4 and deduct 5% from total. We'll accept checks, money orders or cash. (Do not send peanuts.)

**audiotechniques, inc.**

142 Hamilton Ave., Stamford, CT 06902  
Telephone: 203 359 2312

FOR SALE: 100 empty 10 in. reels for ½" tape. Glen Morgan, Music Dept., Lycoming College, Williamsport, Pa. 17701.

CROWN DC-300A, one year old, \$575.00; UREI 560, mint, \$250.00. W/RM-S.A.E. MK2700 equalizer, new with warranty, \$400.00. Frank Sargeant III, Colthurst Farm, Charlottesville, Va. 22901.

INFONICS 204CM 4-track cassette master, brand new, \$750.00. Ancha Electronics, Inc. 189 Gordon St., Elk Grove, Illinois 60007. (312) 437-7712.

MODERN RECORDING TECHNIQUES by Robert E. Runstein. The only book covering all aspects of multi-track pop music recording from microphones through disc cutting. For engineers, producers, and musicians. \$9.95 prepaid. Robert E. Runstein, 44 Dinsmore Ave. Apt. 610, Framingham, Mass. 01701.

FREE CATALOG of studio kits, consoles, p.a., discrete opamps. QCA, Box 1127, Burbank, Ca. 91507.

STAGE & STUDIO AUDIO EQUIPMENT. Turn-key design, permanent, mobile, wiring/switching networks, flight cases, component sales. AKG, BGW, dbx, Eventide, JBL, Orban/Parasound, Otari, SAE, Sennheiser, Shure, Soundcraft, Sound Workshop, Tascam, and UREI. Midwest Sound, 4346 W. 63rd St., Chicago, Ill. 60629. (312) 767-7272.

NAB ALUMINUM FLANGES. We manufacture 8", 10½", & 14". For pricing, write or call Records Reserve Corp., 56 Harvester Ave., Batavia, N.Y. 14020. (716) 343-2600.

## WANTED

WANTED: INVESTMENT CAPITAL for sound equipment rental company. Pays 20% interest; minimum investment, \$5,000. Return principal and interest monthly within two years. Serco, 6820 Santa Monica Blvd., Los Angeles, Ca. 90038. (213) 461-2961.

WANTED: TRANSCRIPTION discs, any size, speed. Radio shows, music. Box 724-db, Redmond, Wa. 98052.

WANTED: Three Neumann U-87 microphones; AKG BX-20E reverb. Call (201) 359-5520 after 6:00 p.m.; ask for Bernie.

## EMPLOYMENT

POET/ARTIST/AUDIO ENGINEER seeking work—graduate IAR, member AES, research experience; multidisciplinary: audio, language, visual, plastic, theater arts — in communications, language, music, and theater arts; wherein multi-track recording techniques, theory/experimentation are utilized in research/production/performance situations. Resume & references. Richard Chandler, Director, Ginnungagap Audio-X Group, 356 Maple Ave., Hartford, Ct., 06114. (203) 524-5504.

DESPERATE ENGINEER looking for employment. Seven years' experience on East Coast in multi-track, remixing, and video teleproduction. Recently relocated to Los Angeles area and will accept any offer; full time, part time, nights, weekends, anything. Extremely hard worker, will work for next to nothing to get established. Good references and, as an added bonus, I'm a commercial pilot with access to many planes. Call or write. Please. (213) 346-6461. 6331 Glade Ave., Apt. H314, Woodland Hills, Ca. 91367.

YOUNG GENERAL ELECTRONIC TECH, Recording Institute of America I & II, studio experience; desires studio work; very willing to work hard. Kevin R. Clock, 1263 Meade, Denver, Colorado. (303) 825-0743.

COMMON SENSE—manufacturing position: Want to learn what makes audio audible? Do you have a minimal electronics background? If you do and are willing to grow with us—call (212) 875-0336.

### EXPERIENCED MUSIC MIXER

For major N.Y.C. studio, expanding staff. Send resume to Dept. 72, db Magazine, 1120 Old Country Rd., Plainview, NY 11803.

● The question of whether the Betamax videocassette player/recorder violates the federal copyright law or is merely a device to make existing programs available to a larger audience is being tested in a lawsuit brought by **Universal City Studios and Walt Disney Productions, Inc.** against the **Sony Corporation**. Sony takes the position that the Betamax is a time-shift machine, which simply permits consumers to see programs they might have missed on their television sets.

● Announcement has been made of the appointment of **L. R. Dongelewicz** as manager for eastern European sales for **RCA** broadcast equipment. Mr. Dongelewicz is based in Sunbury-on-Thames, Middlesex, England. He has been with RCA since 1952.

● Four new reorganizational appointments have been announced by the **Memorex Audio Division**. **Al Pepper** and **Jim Aldrich** have been named product managers for the division. Former managers **Jim McBurney** and **Carl Yankowski** have undertaken new responsibilities, Mr. McBurney moving to London to direct marketing efforts in Europe, Africa, and the Middle East, and Mr. Yankowski to take charge of new products and acquisitions.

● A new service center facility has been opened at Rockland Rd., S. Norwalk, Conn. by the **Philips Audio Video Systems Corp.** The new facility will include warehousing, shipping, and receiving for **AKG Acoustics**, **Philips Audiocom**, and **Philips CCTV** products, formerly serviced in Long Island City.

● **Edmond A. May** has been appointed to the position of vice president, speaker engineering for **Superscope, Inc.** of Chatsworth, Ca. Mr. May will be responsible for both the Marantz and Superscope speaker lines. He comes to Superscope from **James B. Lansing Sound**.

● **Wayne Freeman** has been appointed national sales manager at **BGW Systems**, of Sherman Oaks, California. Mr. Freeman, who comes to BGW from the **Telesco International Corporation**, has a background in electronics and marketing management.

● Supervision of the national sales force of the **Fanon/Courier** line of CB radios, accessories and personal communication products is in the hands of newly appointed **Dick Lask**. Mr. Lask was previously with **Boman Industries** and his own company, **Evergreen Electronics**.

● Stepping up from the position of general manager of **Superscope's** international division, **Steve Rand** has been named as vice president and general manager of **Superscope Canada, Ltd.** In his previous capacity, Mr. Rand devoted a good deal of time to Canadian outlets and is well known to Canadian audio people.

● Occupying the entire second floor of New York City's famed Brill Building, **Soundmixers, Inc.**, a **Sound One Corp.** subsidiary, will provide facilities for major recording sessions in its three 24-track studios, large control rooms, and experimental 16-track studio. In addition to sound recording, the complex will provide videotape screening facilities for feature motion pictures and t.v. commercial scoring. President of the new enterprise is **Harry Hirsch**, who produced gold records for prominent entertainers and recorded for several prime commercial accounts during his period with his own studio, **Media Sound**.

● **Robert J. Anderman** has been appointed broadcast sales manager at **McMartin Industries, Inc.** of Omaha, Nebraska. Mr. Anderman comes to McMartin from the **Harris Corporation**.

● **Howard Webster Town**, audio engineering section manager for the **Ampex Corporation** of Redwood City, California, died on November 21. Mr. Town had been with Ampex since 1969. He was responsible for the ACR-25, the world's first quadruplex cassette vtr. While working as director of engineering of **WTTW**, Chicago, he was instrumental in installing WTTW's television transmitting station on the Sears Tower.

● Expansion of its plant facilities to include a new factory building in Sullivan, Illinois, has been announced by **Switchcraft, Inc.** of Chicago. The plant will be used for the production of switch assemblies, telephone components, and audio connectors. The firm recently took over two switch lines from **Chicago Dynamic Industries**, a factor that has led to the expansion.

● Burgeoning interest in direct-to-disc phonograph recordings, which bypass the tape recording stage of production, is evidenced by the decision of **Audio-Technica**, of Fairlawn, Ohio to import the discs from **Nimbus 9 Products**, of Toronto, Canada. Under the label "Umbrella" the discs will retail for \$12.95. The hefty price stems from the fact that discs produced this way cannot be pressed on a mass basis; in fact, each album will be a limited edition with its own serial number.


● **William J. Overhauser**, founder of **Sparta Electronic Corporation**, has formed a new company, **Corinthian Marketing**, at Incline Village, Nevada. The firm will function as sales representatives and as consultants to firms needing broadcast expertise. Of particular interest is the representation of firms offering products or services to the broadcast industry.

● **Sonab Audio** of Sweden has been purchased by loudspeaker designer **Olle Mirsch. Roland Olvinger**, formerly with **Philips**, has been appointed managing director. In the U.S., **Brian Firestone** has been appointed eastern regional sales manager for **Sonab Electronics, U.S.**, based at Foster City, Ca.

● Newly appointed vice president/general manager of the audio video systems division of the **Ampex Corporation**, **Donald V. Kleffman**, will be handling the professional market. Mr. Kleffman has been with Ampex since 1959, serving as an applications engineer, and lately as marketing manager.

● Responsibility for **Sharp Electronics'** two factory service branches has been assigned to **Thomas F. Rossiter**, new manager of national service administration. Mr. Rossiter comes from **RCA**.

**Now  
available  
in  
paperback  
too!**

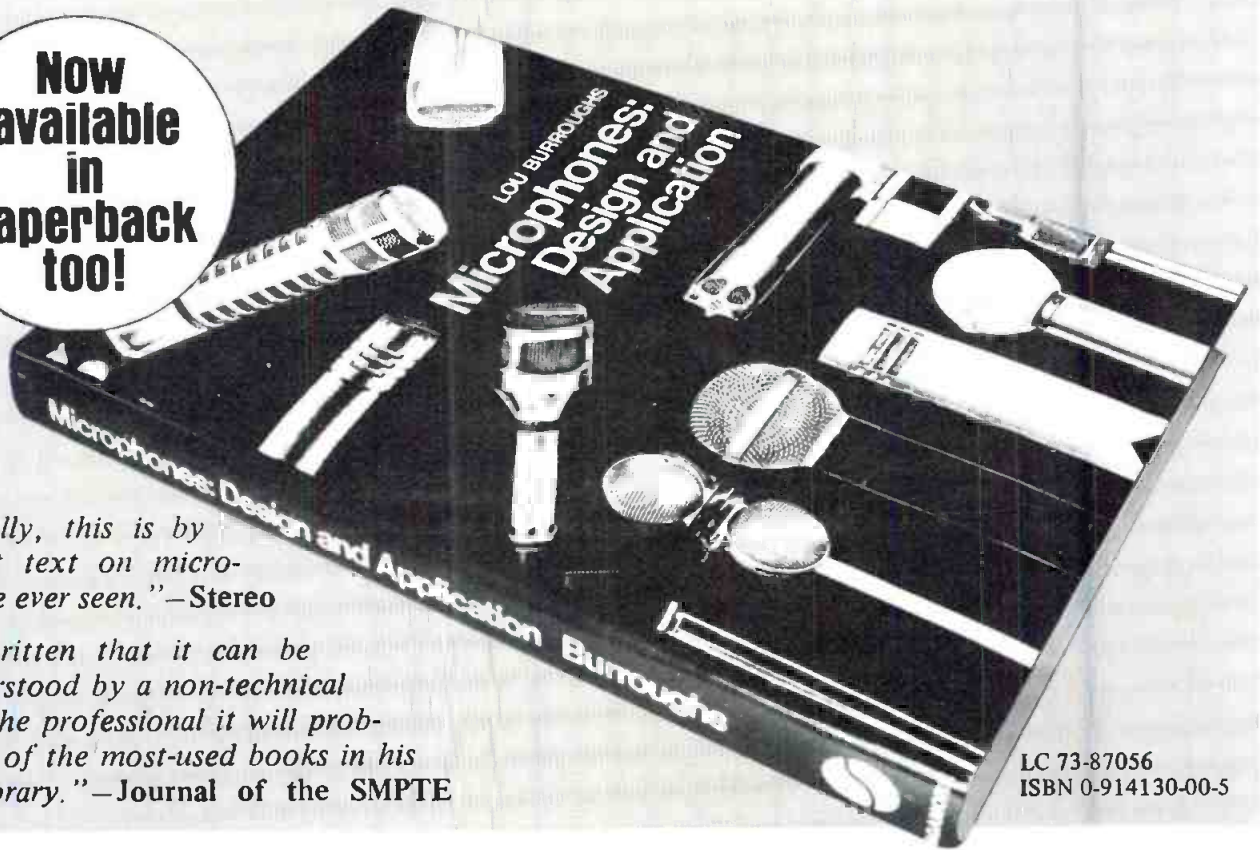

*"Unequivocally, this is by far the best text on microphones we've ever seen."*—Stereo

*"So well written that it can be clearly understood by a non-technical person; for the professional it will probably be one of the most-used books in his reference library."*—Journal of the SMPTE

LC 73-87056  
ISBN 0-914130-00-5

And the rave reviews go on and on. "At last... a decent book on microphones," said David Lane Josephson in *Audio*. "Excellent chapters on various aspects of microphones, which are discussed in great detail," said Werner Freitag in *The Journal of the AES*.

They're applauding **Microphones: Design and Application**, by Lou Burroughs, who has written this practical, non-theoretical reference manual for everyone involved in the application of microphones for tv, motion pictures, recording and sound reinforcement.

Twenty-six fact-packed chapters cover the field of microphones from physical limitations, electro-acoustic limitations, maintenance and evaluation to applications, accessories and associated equipment. Each chapter is crammed with experience-tested, detailed information, and clear, precise diagrams and illustrations that complement the text.

Along with down-to-earth advice on trouble-free microphone applications, Lou Burroughs unfolds dozens of invaluable secrets learned during his more than three decades of achievement in the field. He solves the practical

"The chapter headings give a clear idea of the down-to-earth contents of the book... each chapter contains advice, direction, suggestions and warnings couched in the clearest and most unambiguous language possible." (*Journal of the SMPTE.*) Here are all 26 chapters.

**Microphone Techniques**  
**The Polar Response of a Microphone**  
**Microphone Types**  
**Microphone Loading**  
**Rating Microphone Sensitivity**  
**Microphone Overload**  
**Proximity Effect**  
**Temperature and Humidity Extremes**  
**Microphones Electrically Out of Phase**  
**Microphone Interference**  
**Acoustic Phase Cancellation and the Single Microphone**  
**Microphone Maintenance (this chapter alone "is worth the price of the book" said D.F. Mikes in *Audiovisual Instruction*)**  
**Comparing Microphones with Dissimilar Polar Patterns**  
**The Monitor Speaker**  
**Wide-Range vs. Controlled-Range Frequency Response**  
**Choosing Between an Omni-Directional and a Cardioid Microphone**  
**The Omni-Directional Microphone for Orchestral Pickups**  
**Assembling a Superior Bi-Directional Microphone**  
**The Two-to-One Ratio**  
**Miking for the Drama**  
**Miking the Theatre for Audience Reaction**  
**Wind Screens**  
**Microphones on Booms**  
**Acoustic Separators and the Omni-Directional Microphone**  
**The Hand-Held Microphone**  
**The Lavalier Microphone**

problems you meet in everyday situations, such as:

- When would you choose a cardioid, omni-directional, or bi-directional mic?
- How are omni-directional mics used for orchestral pickup?
- How does dirt in the microphone rob you of response?
- How do you space your microphones to bring out the best in each performer?

**Microphones: Design and Application.** As *Stereo* put it, "It's a hard book NOT to learn from." Order your copies today.

Sagamore Publishing Co., Inc.  
 1120 Old Country Road,  
 Plainview, N.Y. 11803

Yes! Send **MICROPHONES: DESIGN AND APPLICATION.**

\_\_\_hardcover edition(s) @ \$20.00  
 \_\_\_paperback edition(s) @ \$12.95

Name \_\_\_\_\_

Address \_\_\_\_\_


City/State/Zip \_\_\_\_\_

Total Amount \$ \_\_\_\_\_

N.Y.S. Residents add 7% sales tax \$ \_\_\_\_\_

Enclosed is check for \$ \_\_\_\_\_  
 Outside U.S. add \$1.00 for postage.

# Professional Performance at Popular Prices!

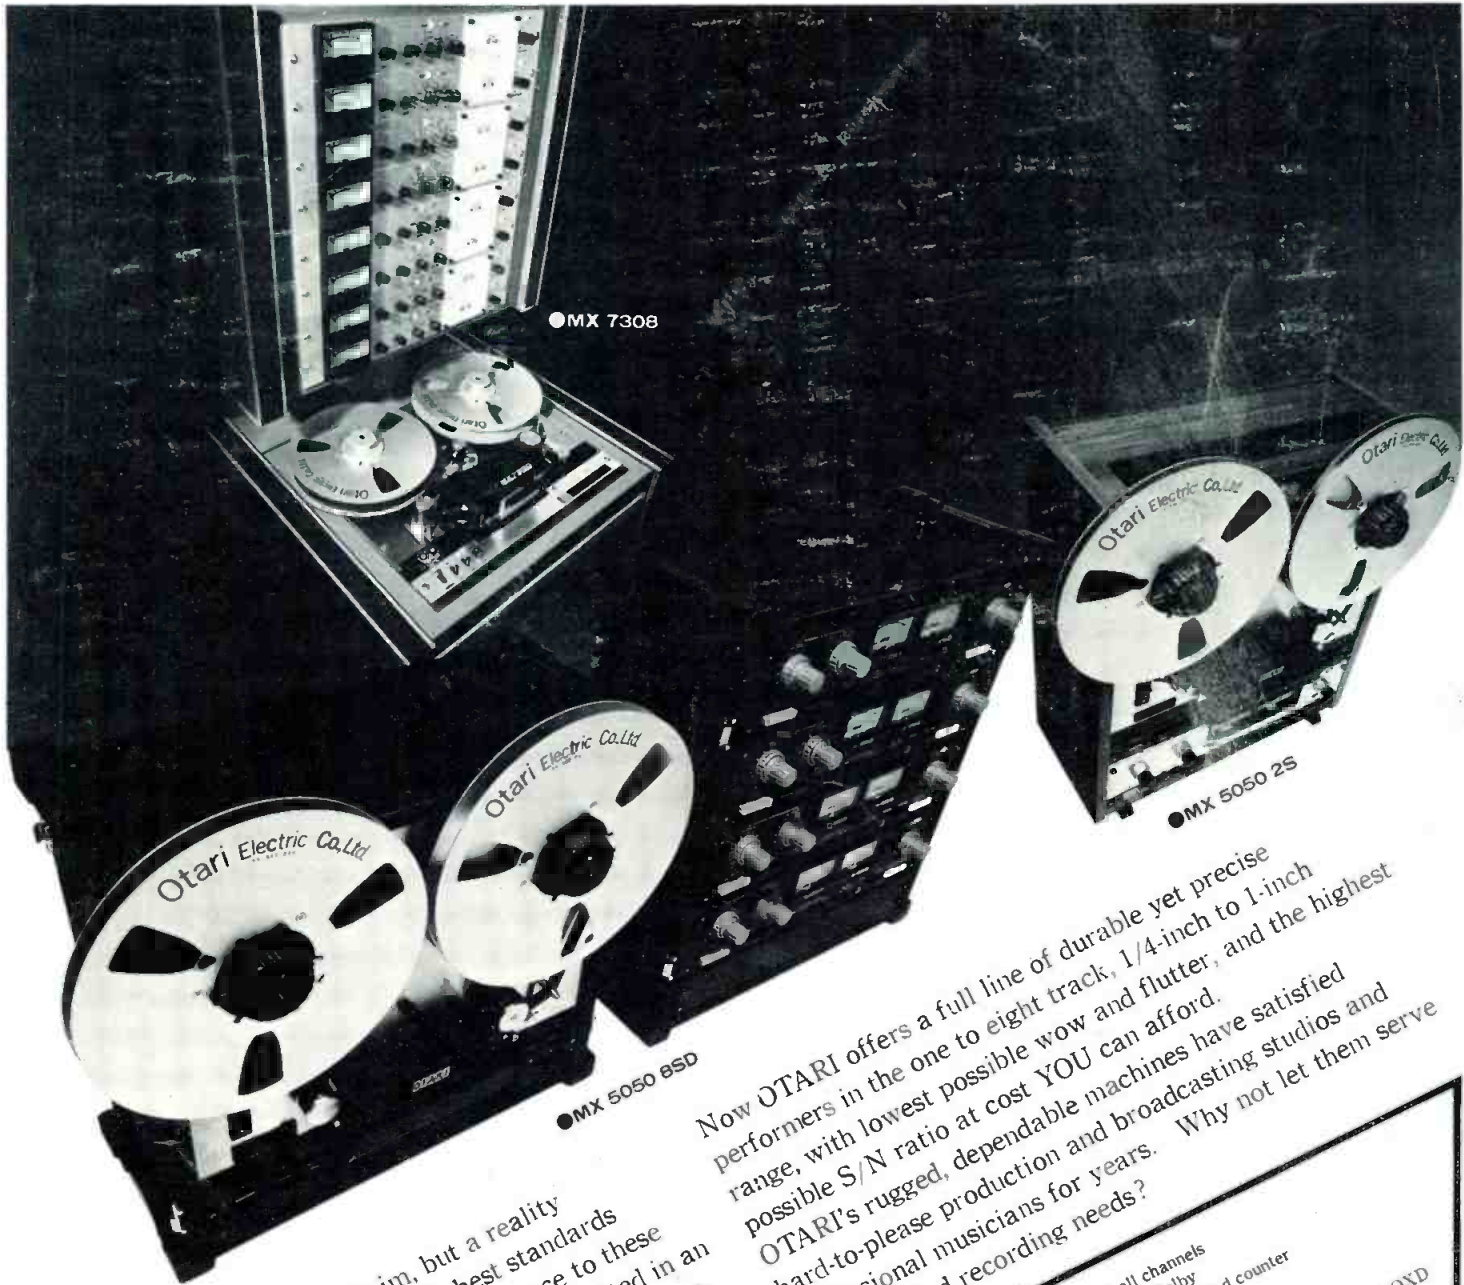

At OTARI, this is not just a claim, but a reality brought by the application of the highest standards of technology and precision. And adherence to these even greater lineup of full capability, professional tape recorders in compact packages with all the performance, features, and reliability you expect from more expensive machines.

Now OTARI offers a full line of durable yet precise performers in the one to eight track, 1/4-inch to 1-inch range, with lowest possible wow and flutter, and the highest possible S/N ratio at cost YOU can afford. OTARI's rugged, dependable machines have satisfied hard-to-please production and broadcasting studios and professional musicians for years. Why not let them serve YOUR sound recording needs?

- MX 5050 2S
- \* Exceptional S/N ratio and crosstalk
- \* Motion sensing control logic prevents tape damage
- \* Selective reproduce for overdubbing (standard)
- \* Front accessible bias, EQ, and operating level
- \* Built-in test and cue oscillator
- \* Professional 600 ohm + 4 dB outputs and XLR connectors.
- \* Front panel edit and cue controls
- \* DC servo capstan option

- Four heads
- Bias adjustable for new high energy master tapes
- MX 5050 BSD
- \* 1/2-inch eight channel recorder
- \* XLR line input and output connectors
- \* Test and calibration oscillator
- \* Variable speed DC servo capstan
- \* Plug-in card electronics and head assembly
- Motion sensing control logic prevents tape damage

- Selective reproduce on all channels
- Interface jack for dbx and Dolby
- Accessible heads, minute and second counter
- Front adjustable cue and edit control
- Easily accessible electronics adjustments
- Also available in four channel 1/4" and 1/2" MX 5050 QXD
- \* Exclusive OTARI features



Contact OTARI today for full information

Otari Electric Co., Ltd., Otari Bldg., 4-29-18, Minami Ogikubo, Sugiyama-ku, Tokyo 167, Japan. Phone: (03)333-9631

U. S. A. : Otari Corporation, 981 Industrial Road, San Carlos, California 94070, Phone: 415 593-1648

- Canada: Noresco Manufacturing Co., Ltd., 100 Floral Parkway, Toronto, Ontario M6L2C5 Phone (416) 249-7316
- U. K. : C. E. Hammond & Co., Ltd. 105/109 Oyster Lane, Byfleet, Surrey KT14 7LA, Phone: Byfleet 4 1131
- France: Reditec 62-66, Rue Louis Ampère (Zone Industrielle des Chanoux), 93360 Neuilly-Plaisance, Phone: 935-9786
- Belgium: Trans European Music S. A. Koeivijverstraat 105, 1710 Dilbeek, Phone: (02) 569 1823
- Netherlands: Selectronic B. V. Sluisplein 3-4, Ouderkerk aan de Amstel, Postbus 28, Phone: 02963/4838/4966
- Australia: Klarion Enterprises (Pty.) Ltd. Regent House, 63 Kingsway, South Melbourne, 3205, Phone: 61 3801
- Singapore: Otari Electric Co., Ltd., Singapore Representative Office, 2701-A 27th Floor, International Plaza, Anson Road, Singapore (2)