

498105KUJGWA325COMI1 1083 9999
KUNW RADIO
D S 50 UNIV OF WASH
325 COMMUNICATIONS PLDG
SEATTLE WA 98105

LOCATION, 1100 ... GR 5600 N. CALDWELL.

JEFFREY MO ...



The broadcast microphone with hidden talents for all your talent. The SM7.

To help broadcast engineers contend with a wide variety of voices, the Shure SM7 is really four microphones rolled into one. That's because the SM7 Unidirectional Dynamic Microphone features two frequency-tailoring switches that provide a choice of four different response curves—to best suit each individual voice and situation.



Depending on the switch settings, the SM7 can provide an extremely wide-range flat frequency response, add presence and crispness to speech, boost vocal clarity, roll off low frequencies to provide natural closeup miking, or help reduce sibilance.

At the same time, a tight cardioid pattern effectively rejects unwanted background noise and minimizes off-axis coloration.

Beneath the SM7's integral foam windscreen is a rugged steel cage that


surrounds and protects the cartridge from damage. And Shure's patented air suspension shock mount offers uncompromising isolation, cutting down on the effects of mechanical vibration in the studio.

Engineers will also appreciate the built-in humbucking coil that guards the SM7 against electro-magnetic interference.

With so many talents, it's no wonder the SM7 is following in the successful footsteps of Shure's legendary SM5. And that's quite an act to follow.

For more information on the complete line of Professional Broadcast Products, call or write Shure Brothers Inc., 222 Hartrey Ave., Evanston, IL 60204. (312) 866-2553.

SHURE®

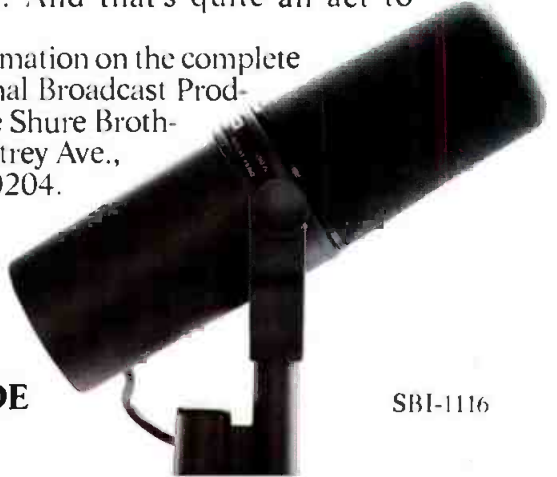

THE SOUND OF THE PROFESSIONALS...WORLDWIDE

Circle 10 on Reader Service Card

SBI-1116



OCTOBER 1983 VOLUME 17, NO. 9

Publisher
Larry Zide

Associate Publisher
Elaine Zide

Editor
John M. Woram

Managing Editor
Mark B. Waldstein

Associate Editor
Ricki Zide

Technical Editor
Linda Cortese

European Editor
John Borwick

Layout & Design
Kathi Lippe

Advertising Coordinator
Karen Cohn

Book Sales
Lydia Calogrides

Circulation Manager
Eloise Beach

Graphics
K & S Graphics

Typography
Spartan Phototype Co.

FEATURES

IN MY OPINION 6	Norman Crowhurst
THE MUSIC GOES ROUND AND ROUND 28	Carole B. Davis
A JOURNEY THROUGH TIME 32	Diane Collins
A db CONVENTION REPORT: THE 74th AES CONVENTION 36	Ken Pohlmann

DEPARTMENTS

LETTERS 2	EDITORIAL 27	CLASSIFIED 55
THEORY AND PRACTICE 10		Ken Pohlmann
SOUND REINFORCEMENT 19		John Eargle
SOUND WITH IMAGES 22		Len Feldman
DIGITAL AUDIO 25		Barry Blesser
NEW PRODUCTS AND SERVICES 48		
PEOPLE, PLACES, HAPPENINGS 57		

db, the Sound Engineering Magazine (ISSN 0011-7145) is published monthly by Sagamore Publishing Company, Inc. Entire contents copyright © 1983 by Sagamore Publishing Co., 1120 Old Country Road, Plainview, L.I., N.Y. 11803. Telephone (516) 433-6530. db is published for those individuals and firms in professional audio-recording, broadcast, audio-visual, sound reinforcement, consultants, video recording, film sound, etc. Application should be made on the subscription form in the rear of each issue. Subscriptions are \$15.00 per year (\$28.00 per year outside U.S. Possessions; \$16.00 per year Canada) in U.S. funds. Single copies are \$1.95 each. Editorial, Publishing and Sales Offices: 1120 Old Country Road, Plainview, New York 11803. Second class postage paid at Plainview, NY 11803 and at an additional mailing office. POSTMASTER: Send address changes to db Magazine, 1120 Old Country Road, Plainview, NY 11803.

ONE PASS

**The Only Four-Second
Tape Erasers**

**That's Garner...
The Quality Eraser**

You're recording on a machine that costs hundreds or thousands of dollars, and you're recording on recycled tape. Can you guarantee that tape is absolutely clean? You can if you're using a Garner Audio Tape Degausser.

Garner is the standard of the industry...designed to the specifications of leading tape manufacturers. Garner is a conveyor-belt tape eraser. It can erase in less than five seconds what most degaussers take up to a minute to erase, and Garner erasers do a better job.

Time savings, ease of operation, quality of erasure, and rugged construction make Garner the most cost-effective eraser available.

Garner has established a reputation as the "Eraser People" because we manufacture a complete line of both audio and video erasers. Call and let us show you what a Garner eraser can do for you.



Dependability...Guaranteed



4200 N. 48th Street Lincoln, NE 68504
Phone: (402) 464-5911 Telex: 438068

Circle 13 on Reader Service Card

Letters

Index of Advertisers

Altec	13
Amber Electro	22
Ampex	11
ANT Telecommunications	23
DeltaLab	19
Duncan	38
EFX Library	59
Garner	2, 14
GRD	6
JBL	5
Klark-Teknik	12
Lexicon	16-17
Microtran	24
Neve	9
Orban	4
Otari	3
Polyline	33
Shure Bros.	Cover II
Studer Revox	Cover IV
Sound Ideas	33
STL	31
Telex	8, 21
UREI	Cover III

LOST IN SPACE

TO THE EDITOR:

I am a regular follower of John Eargle's column on Sound Reinforcement, and have suddenly found myself in a dilemma from which I cannot rest without an explanation. In the September issue, Eargle's column is entitled, "Microphones in Sound Reinforcement, Part 3." Have I been in the twilight zone for parts 1 and 2, or is this some kind of cruel joke? Earth to db...please respond.

JANET SORENSON
Houston, Texas



db replies:

Boy it's tough to fool db readers! Skip two measly columns and they jump down your throat. No, you're not in the land of Rod Serling. For the full story behind this unfortunate incidence (makes it sound like international politics, doesn't it?), see John Eargle's column on page 19.

WE'VE COME NOT TO PRAISE

TO THE EDITOR:

After all the published articles and test reports praising or castigating the development and acceptance of the CD, I found Michael Tapes' article on CDs (for once) refreshing. I think Compact Disc technology is a great concept that still needs a bit of debugging in the area of recording techniques and perhaps in the electronics themselves. The product holds much promise; the *lack of noise* sounds great, but to say that the music sounds great is ludicrous. However, I haven't closed my mind. It's a great idea—to be listened to at a later date. Thanks, Michael.

MAX FOLEY
Max's Recording
Toledo, Ohio

COMING NEXT MONTH

• In November, db celebrates its 16th birthday! To mark the occasion, we'll be featuring a special insert commemorating our first issue, complete with ads and "new products" from 1967. We'll also be featuring articles updating ones that appeared in that first issue. In addition, our new feature "In My Opinion" returns, along with articles on Bearsville Studio, audio/musical designs for animated shows, and more. Of course, our regular columnists and departments will also be on hand. All this—and more—in November's db—**The Sound Engineering Magazine.**



OTARI THE FASTER MASTER
 7 1/2 ips MASTERED
 The DP-80 High Speed Audio Tape Duplicator
 480 ips

Otari just raised the quality of pre-recorded cassettes.

The new DP80 "Faster Masters" high-speed audio duplicating system: Quality comes up to speed. The new DP80 Master Reproducer runs 7½ ips masters at an amazing 480 ips. By doubling the old, marginal standard which relied on 3¾ ips masters plugging along at 240 ips, we've just taken the music cassette out of the early seventies and raised its quality to a higher level. The new DP80 will produce the kind of cassettes the discriminating new music buyers of the 80's want.

High production yields are still an essential aspect of the new DP80. This 64:1 system may be expanded up to 20 slave recorders and has been engineered with advanced design electronics and


these important features:

- Normal and chrome tape capability.
- Front accessible, plug-in modular electronics.
- Advanced dual capstan, D.C. servo drive for reduced tape skew and wear.
- Long-life Sendust ferrite heads.
- Status monitoring (optional).

Contact Mike Pappas, Otari Industrial Products Manager, for complete information on the duplicator that can bring your business up to speed — in both product and profits.

OTARI Industrial Products Division, 2 Davis Drive, Belmont, California 94002, (415) 592-8311 TWX: 910-376-4890

The 480 ips Master Reproducer: the heart of the "Faster Masters" DP80 system.

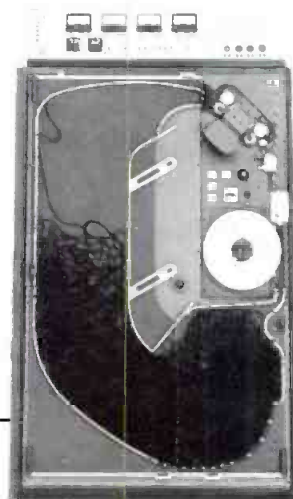

OTARI

Technology You Can Trust

Audio Tape Duplicators & Video Tape Loaders

Proven Performers. Improved.



EMILAR

1365 N. McCan St. • Anaheim, CA 92806 • 714.632.8500 • 800.854.7181 • TWX 910.591.1191

Circle 70 on Reader Service Card

WE WANT MORE TO THE EDITOR:

I found Greg Hanks' article on modifying the recording process for film production very informative and am looking forward to Part II. Knowing little about audio as it relates to film production, I find this type of article particularly interesting and encourage **db** to publish more of this kind of information. I would also like to see more computer-related articles, as computers are being used more and more in the audio world. Thanks for a magazine that I still learn a great deal from.

GENE BAXTER
Philadelphia, PA

db replies:

Your letter comes at just the right time for us to tell you and all our readers that what you want is happening! We will be having many more articles about audio in video and on film. We also will have a regular column on computers in the pro audio world. It's already in the works.



It speaks for itself.


We thought about hiring an expensive superstar to extoll the virtues of the famous Orban 622B Parametric EQ. After all, there are 622B's backing up superstars worldwide in recording studios, arena shows, broadcast facilities... you name it! But we decided not to. Because ultimately, the Orban 622B speaks for itself—it's the most widely used, popular professional Parametric in the world.

The 622B combines full, four-band Parametric equalization with tunable notch filtering to offer extraordinary versatility and control. Our "constant-Q" design provides -40dB attenuation while allowing gentle, musically-useful broadband EQ too. This makes the 622B ideal for critical sound reinforcement chores as well as studio production work.

Call your local Orbandealer for further information.

orban Orban Associates Inc. 645 Bryant St.
San Francisco, CA 94107 (415) 957-1067
TLX: 17-1480

High Technology. JBL.

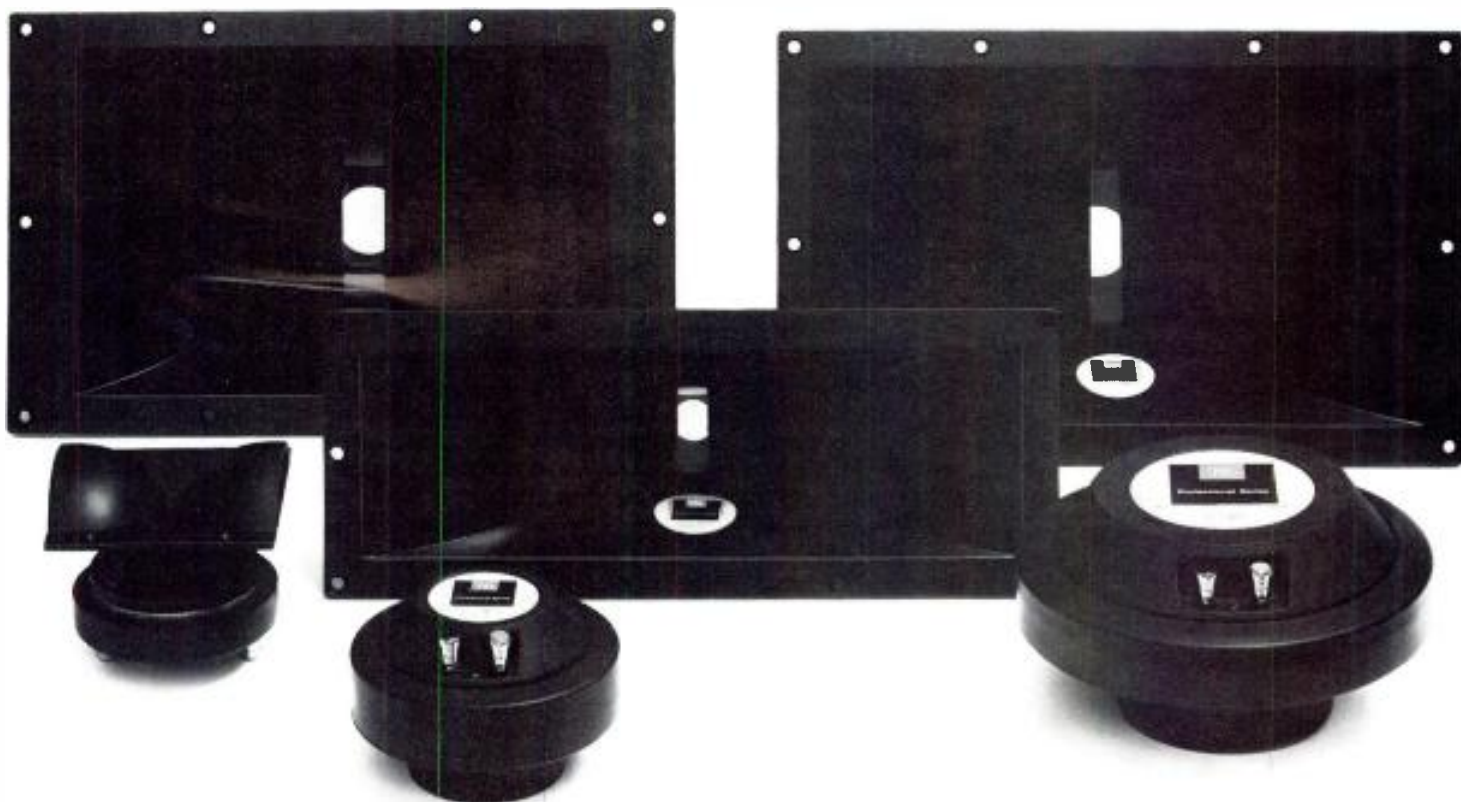

Until now, buying advanced technology high frequency components could be both a pleasure and a problem. A pleasure because of the improved performance these devices can provide. A problem because exotic designs can often be less than reliable. Or easy to use. Or cost effective.

At JBL, we don't think you should have to give up practicality to get the performance you need. And to prove it we're introducing a new generation of high frequency components that combine unsurpassed frequency response, high reliability, and surprisingly affordable prices.

The secret behind this rare blend of features lies in the use of new engineering technologies that not only improve performance, but actually reduce manufacturing costs.

Our latest 1- and 2-inch throat diameter compression drivers, for example, utilize a pure titanium diaphragm with JBL's patented diamond-pattern

surround. The exceptionally high stress limit of titanium together with the stronger surround allows this design to match the reliability of phenolic and composite type diaphragms. At the same time, the design's improved




JBL's titanium-diamond diaphragm combines performance with reliability.

flexibility and light weight provide the extended frequency response of more expensive, fragile, exotic metal diaphragms. Finally, the drivers feature a newly developed, high-flux ferrite magnetic structure for maximum efficiency and extended response.

And the drivers are only part of the story. Because JBL engineers have also developed a complete new line of compact,

Bi-Radial™ constant coverage horns. Designed for flush cabinet mounting or compact cluster applications, the horns provide precise pattern control. The horn's highly consistent horizontal dispersion eliminates the problems of midrange narrowing and high frequency beaming associated with conventional horn designs.

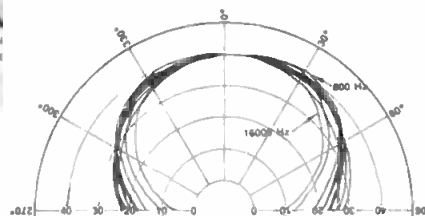

Composite 1/3-octave polar responses of a 2380 horn from 800 Hz - 16 kHz in the horizontal plane.

So if you're looking for advanced high frequency components that combine real world practicality with unmatched performance, ask your local dealer about the new generation of high technology. From JBL.



Professional
Products
Division

JBL/harman international

JBL Incorporated,
8500 Balboa Boulevard, P.O. Box 2200,
Northridge, California 91329 U.S.A.

In My Opinion

Patents, Copyrights and "Pirating"

This month db inaugurates a new feature. "In My Opinion" is intended (surprisingly enough) to be a forum for ideas on the state of the audio industry. If you've got something to say that's more than a letter but not quite an article, we've now got you covered.

Kicking off the proceedings this month is Norman Crowhurst, a former db columnist.

So, don't forget. If you're happy, sad, confused, mad, etc. about something audio, write it down, send it in, and let all of us know what's on your mind.

• People, both lay and professional, seem confused by the controversy over this subject. It's being referred to the Supreme Court, but is it really a legal problem? Howard Russell, in a letter to the editor in April's db, suggested that it was a moral problem. I suggest the problem is really one of perspective.

More than half a century ago I came into electronics which was then a rapidly advancing industry (and you'll say we hadn't seen anything then!). Companies had scores of attorneys working up patent applications on every advancement the company made, to protect their "inventions."

Patents and copyrights were introduced at a time when not many inventions were being made—compared with today, that is. But when I started, the electronics field was already advancing at a pretty good clip. It didn't take young engineers long to realize that by the time most new inventions

got patented—a process that could take from one to five years—we were already moving on to something that made that invention obsolete.

So, rather than following the big companies' example, we didn't patent every new thing that looked to be patentable. Of course, the question, "Can the idea or development be patented, anyway?", was something that patent attorneys and patent office examiners have always kicked around—and made a pretty handsome living doing it. But we saw another criterion for deciding whether or not to apply: How central to possible future developments does this new device seem to be?

This criterion caused us to reject a considerable portion of the items for which tradition would have had us apply for patents as not worth the time, effort or expenditure. If the patent was likely to be obsolete by the time it issued, if not before, then why apply

for it? Before it issued someone might copy it, true, but we'd have to wait on its issuance to sue for infringement, by which time we'd probably have fresher eggs to fry!

Look at it another way. The whole purpose of patent law is to protect an inventor's investment. He/she spends, or his company spends, a lot of resources developing this invention. Getting a patent is intended to prevent some "rip-off" artist from copying an invention and making it cheaper, thus robbing the true inventor of the rewards for the labor and resources put into developing it, unless royalties are paid that fulfill that purpose.

Okay, so now suppose the expected useful life of an invention is, at the outside, two years. The original reason for applying for a patent is no longer quite valid, although I'm sure someone will argue with me about that! Really good "copy artists" out there may get into production to steal a little bit of the market before it's obsolete. It certainly isn't going to be worth protecting for the relatively long time that's automatic when a patent is granted.

The real time when protection *could* help is before the patent issues, and the patent doesn't really give protection until it issues. It's true the words "Patent Applied for" on a product can be a bit of a deterrent. But certainly not as much of a deterrent as it was in the days when the patent had considerable promised "life" ahead of it. So my company then adopted the following policy.

First, we never resorted to stealing other people's ideas. That would be a waste of time: they were already in production, and by the time we geared up, the thing could well be obsolete. The better way was to be first with the new ideas and inventions, so we could exploit them before moving on to newer things. We realized that using patents to protect an investment of time and resources in producing inventions had become somewhat out of date. There are exceptions to this, of course, but the days when companies printed 50 to 100 patent numbers on their products are, or ought to be, gone. That practice no longer makes any sense. The protection it affords isn't worth what it costs.

The same is largely true about copyright. Any author will confirm this. One book in a hundred may go on selling through decades. The other 99 sell

Exquisite Sound
Modest Cost

GRD
AMERICA'S MOST
EXPERIENCED
REAL TIME DUPLICATOR

HIGH QUALITY PRINTING
AND ASSEMBLY

CUSTOM LOADED BLANK
AGFA CASSETTES, CHROME

(602) 252-0077
P.O. BOX 13054
PHX, AZ 85002
Canada Division
(403) 283-8068

THE RECORDERS Quartz lock, Auto Bias,
30-20,000 Hz, 0.25% w.r.m.s., Dolby B -
more than 67 db S/N ratio

Circle 16 on Reader Service Card


Updated Recording Studio Handbook

A must for every working professional... student... audio enthusiast

Features latest state-of-the-art technology of creative sound recording.

21 Fact-Filled Chapters

- | | |
|--|--|
| <p>I. The Basics</p> <ol style="list-style-type: none"> 1. The Decibel 2. Sound <p>II. Transducers: Microphones and Loudspeakers</p> <ol style="list-style-type: none"> 3. Microphone Design 4. Microphone Technique 5. Loudspeakers <p>III. Signal Processing Devices</p> <ol style="list-style-type: none"> 6. Echo and Reverberation 7. Equalizers 8. Compressors, Limiters and Expanders 9. Flanging and Phasing <p>IV. Magnetic Recording</p> <ol style="list-style-type: none"> 10. Tape and Tape Recorder Fundamentals 11. Magnetic Recording Tape 12. The Tape Recorder <p>V. Noise and Noise Reduction</p> <ol style="list-style-type: none"> 13. Tape Recorder Alignment 14. Noise and Noise Reduction Principles | <ol style="list-style-type: none"> 15. Studio Noise Reduction Systems <p>VI. Recording Consoles</p> <ol style="list-style-type: none"> 16. The Modern Recording Studio Console <p>VII. Recording Techniques</p> <ol style="list-style-type: none"> 17. The Recording Session 18. The Mixdown Session <p>Three all-new Chapters</p> <ol style="list-style-type: none"> 19. The In-Line Recording Studio Console
(The I/O Module. The Basic In-line Recording Console. Signal flow details.) 20. An Introduction to Digital Audio
(Digital Design Basics. Digital Recording and Playback. Error Detection and Correction. Editing Digital Tapes.) 21. Time Code Implementation
(The SMPTE Time Code. Time-Code Structure. Time-Code Hardware.) |
|--|--|

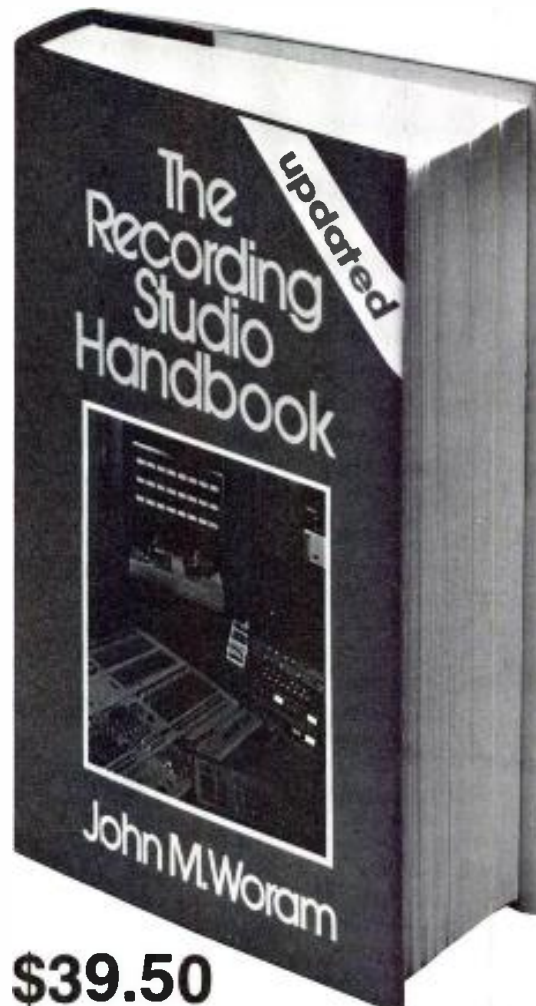

\$39.50

Easy to Order

You can enclose a check with your order or charge it to Master Charge or BankAmericard/Visa. Use the coupon below to order your copies of the new updated *Recording Studio Handbook* (\$39.50).

ELAR PUBLISHING COMPANY, INC.

1120 Old Country Road, Plainview, N.Y. 11803

Yes! Please send _____ copies of THE RECORDING STUDIO HANDBOOK. \$39.50. On 15-day approval.

Name _____

Address _____

City/State/Zip _____

Total payment enclosed \$ _____
(In N.Y.S. add appropriate sales tax)

Please charge my Master Charge
 BankAmericard/Visa

Account # _____ Exp. date _____

Signature _____

(changes not valid unless signed)

Outside U.S.A. add \$2.00 for postage.

Checks must be in U.S. funds drawn on a U.S. bank.

The *Recording Studio Handbook* is an indispensable guide with something in it for everybody. It covers the basics beautifully. It provides in-depth insight into common situations and problems encountered by the professional engineer. It offers clear, practical explanations on a proliferation of new devices. **And now it has been expanded with three all-new chapters... chapters on the in-line recording studio console, digital audio and time code implementation.**

Sixth printing of industry's "first" complete handbook

The *Recording Studio Handbook* has been so widely read that we've had to go into a sixth printing to keep up with demand (over 30,000 copies now in print). Because it contains a wealth of data on every major facet of recording technology, it is invaluable for anyone interested in the current state of the recording art. (It has been selected as a textbook by several universities for their audio training program.)

Highly Acclaimed

Naturally, we love our book. But don't take our word for it. Here's what others have to say:

"John Woram has filled a gaping hole in the audio literature. This is a very fine book... I recommend it highly." *High Fidelity*

"A very useful guide for anyone seriously concerned with the magnetic recording of sound." *Journal of the Audio Engineering Society*

5-Day Money-Back Guarantee

When you order *The Recording Studio Handbook* there's absolutely no risk involved. Check it out for 15 days. If you decide it doesn't measure up to your expectations, simply send it back and we'll gladly refund your money.

well for the first few months, maybe even a year, then taper off as reader interest turns to something newer. Isn't the same true for records—maybe even more so?

This whole question of copyrighting is probably sparked by the enormous amounts of money that have hitherto been possible from such things as a succession of gold and platinum records. This has run into millions, only because the protection afforded by copyright has made rather inordinately large royalties possible. So when someone records a "hit," everyone associated with it makes a killing which they want to protect with copyright law.

When you think about it, you'll realize that this is being a little unrealistic. Could not the argument we applied to the use of patents and patent law, half a century ago, equally apply here? People always buy what's available. If someone with a "hit" record has a good distribution network and floods the market quickly, thus making what would still be a tidy sum from a relatively narrow markup, the "copy artists" wouldn't be able to get started in time to make any money off that item in most instances.

All right, let's say the really big question is movies and video tapes. People in that industry should resign themselves to the fact that the "grave train" days are over. Quite incidentally, recognizing that as a fact of life may

well prove to be an incentive to producing quality entertainment once again, instead of the garbage that so-called entrepreneurs have been struggling to make a fast buck with lately.

Obviously, whichever field we consider, the original producer of something is in the best position to make large quantities of it before anyone else has time to copy it. That means he can set the price low enough, and still make a profit, effectively keeping the copy artists from making any money from their relatively smaller runs of any individual item. Isn't that the logical way of striking a balance in this situation?

Go back to inventions for a moment. Even when patent protection was more valid than it is today, many companies made a more or less regular practice of "stealing" inventions, regarding the cost of being sued for infringement as a cost of doing business. Howard Russell may regard that as a moral question. But in reality it is a fact of life. There is nothing criminal about it: all it leads to is civil suits. If the court ruled it was infringement, they paid! Big deal!

Maybe there's an argument for a reverse psychology. As an author, I've always believed that imitation is a form of flattery (sincere or not). So all I ask from someone who wants to reprint something I wrote is to give me credit for having written it first. That way, if someone wants to read the original

material, he/she would know what to ask for. Isn't that fair?

Now, if copying does become a federal crime, who's going to put a notice on whatever it is he copies that says, in essence, "We stole this from ..."? But if on the other hand it's legal to copy, then it would be logical to define a different crime: that is, to copy something *without* acknowledging where it came from. Doesn't that make a lot more sense, and avoid all the conflicts presently raging?

It seems perfectly logical to me. If someone wants to say Crowhurst says... and then quotes me—thank you for the exposure! He's not stealing, and he may benefit me as well as himself by doing that. On the other hand, if he takes my material and pretends it's his, I would call that stealing!

Yet it is true that a lot of work goes into mastering, working up ideas, and all of that, which the copy artist doesn't have to support. But isn't it conceivable that this copyright and patent protection has encouraged what has really become an extortion racket for that kind of work? It seems to me that what is happening is that the greatly simplified copying processes have brought about a natural way of restoring balance to a situation that has gotten a little "out of hand" in a different direction.

At least, that's my contention. What do you have to say? ■

TELEX

AUDIOCOM

For Communications Behind The Scene

AUDIOCOM. The closed circuit intercom for small, large, portable or fixed installations at concerts, stage productions, film or TV studios, stadiums or race tracks, industrial or public safety applications. AUDIOCOM belt packs or wall mount stations can be "daisy-chained" by the dozens over five miles without degradation in signal quality or strength. AUDIOCOM interfaces with other sound systems and telephone circuits. AUDIOCOM includes headsets, mics, cables, switchboards, signalling kits, even battery packs for remote locations; the complete intercom system for communications behind the scene.

Quality products for the audio professional.



TELEX

TELEX COMMUNICATIONS, INC.

9600 Aldrich Ave So Minneapolis MN 55420 U S A

Europe: Le Bonaparte—Office 711, Centre Affaires Paris-Nord, 93153 Le Blanc-Mesnil, France

Circle 17 on Reader Service Card



Capture sound at its purest.

Hold a seashell to your ear and hear nature's pure and natural sound. Compare it to the final sound produced by a Neve. You'll begin to understand why Neve is far and away the most respected name in audio mixing.

The Neve sound is so pure and natural, one might suspect that nature herself had a hand in the design. Perhaps.

Not every engineering achievement can be explained away. There are mysteries in nature, just as there are mysteries man-made.

Some suggest that Neve's unique Formant Spectrum Equalizers account for its unparalleled sound by taking into account the psycho-acoustic properties of voice and music while satisfying the critical demands of balance engineers. Others claim it's superior technical performance, novel circuitry, or high quality components.

All agree on one thing: To capture sound at its purest, aspire to Neve.

For further information, call us, or write.

Aspire to **Neve**

RUPERT NEVE INCORPORATED: Berkshire Industrial Park, Bethel, Connecticut 06801 (203) 744-6230 Telex 969638 • 7533 Sunset Blvd., Hollywood, California 90046 (213) 874-8124 Telex 194942 • RUPERT NEVE OF CANADA, LTD. represented by: Manta Electronics Group, 204 King St. East, Toronto, Ontario M5A 1J7 Canada (416) 868-0513 Telex 06-986766 • Sonotechnique, 2585 Bates, Suite 304, Montreal, P.Q. H3S 1A9 Canada (514) 739-3368 Telex 055-62171

NEVE ELECTRONICS INTERNATIONAL, LTD: Cambridge House, Melbourn, Royston, Hertfordshire, SG8 6AU England Phone (0763) 60776

RUPERT NEVE GmbH: 6100 Darmstadt Bismarckstrasse 114, West Germany Phone (06151) 81764.

Circle 18 on Reader Service Card

Theory & Practice

The Secret of Flux Reversal

• Right off the bat. I can unequivocally state that there wasn't any money involved—I mean, am I some kind of cheap barroom hustler? Rather, it was my undeniably intense urge to correct misconceptions, my desire to clearly point out what is true and what is not, and my compulsion to educate and enlighten the populace. That, and my exasperation at the loudmouth jerk sitting at the next table.


I was at the Rathskeller, in deep consultation with the members of the Greater Miami New Wave Opera, an organization dedicated to the principles of convolution in relation to subhuman behaviorism. Their latest production, the metaphysical video "Studio Police," had broken new ground in the study of

visual/verbal abuse with its vivid scenes of death and destruction symbolizing the impact of out-of-calibration tape machines on young minds. The members were also formulating a new theory of heuristic thinking as applied to the question of measuring the significance of auto-location against mutual coupling, to determine which was the most powerful tool. Clearly, they represented a startling new breed of social philosophers.

Meanwhile, our iconoclastic discussion was suffering from the effects of a blabbermouth at a nearby table. He was one of those know-it-all types—surrounded by admiring freshman girls—spouting this incredible nonsense on whatever technical topic came

to mind. We listened with disgust as he launched into a discussion of digital recording—explaining all of these gee whiz things about digital—how all the Beatles' recordings could be stored in a space no larger than a period at the end of a sentence, how the cost would be so low that every man, woman, and child could own a complete library of every piece of recorded music, etc. The GMNWO members were shaking their heads. They hold a healthy respect, and contempt, for current digital methods; they realize that digital is far from perfect, they understand that with digital recording and reproduction we have merely begun a new phase of evolution. Then the Mr. Know-It-All launched into a fantasy description of

Do You Know Where?

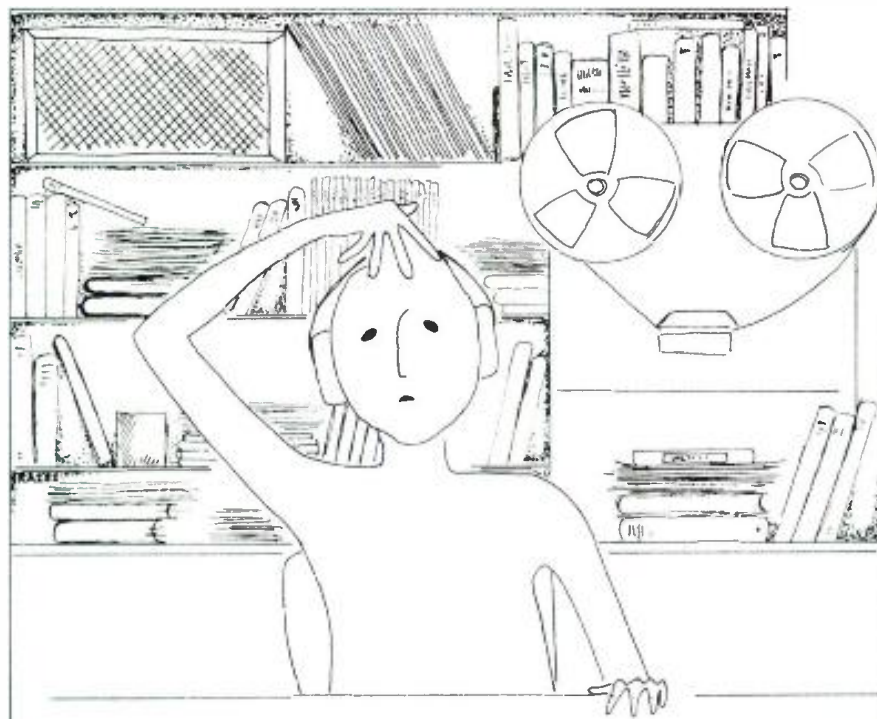

Have you misplaced your db again? Our high quality, royal blue vinyl binders keep 12 copies of db neat and handy for ready reference.

Just \$9.95, available in North America only. (Payable in U.S. currency drawn on U.S. banks.) ORDER YOURS NOW!!

Sagamore Publishing Co., Inc.

1120 Old Country Road
Plainview, NY 11803

YES! Please send _____ db binders @ \$9.95 each, plus applicable sales tax. Total amount enclosed \$ _____

Name _____

Company _____

Address _____

City _____

State/Zip _____

AMPEX GRAND MASTER® 456

Consistency is what you get with Ampex Grand Master® 456. Consistency you can count on, reel after reel, case after case, year after year.

Consistency that begins with manufacturing. Every reel of Grand Master 456 Studio Mastering Tape is made from the finest raw materials—base films, oxides, and binders. And they're inspected for quality and consistency every step of the way. Consistency that is assured by over 118 stages of inspection.

Consistency proven by testing. For example, every reel of 2" Grand Master 456 is tested end-to-end and edge-to-edge, to make certain you get virtually no tape-induced level variations from one reel to the next. The strip chart in every box of 2" 456 proves it.

But, consistency is what you expect from the audio quality leader. That's why more recording professionals have more confidence in Ampex tape than in any other studio mastering tape.

AMPEX

Ampex Corporation • One of The Signal Companies



consistent

Ampex Corporation, Mastering Tape Division, 401 Broadway, Redwood City, CA 94063, (415) 367-3809

Circle 19 on Reader Service Card

how floppy disk digital recordings are comprised of 1s and 0s. I couldn't take it—something inside of me snapped. I pulled a floppy disk from my inside pocket and flicked it over to his table. He stopped in mid-sentence.

THE UNVARNISHED TRUTH

"Listen, you, that's a floppy disk—digital data—and there are no 1s and 0s on there, none at all. There never were and there never will be. Anyone who says there's 1s and 0s on there is full of dither."

"What are you talking about? I know what's digital! And every digital recording has bits in it, and every digital tape is just a lot of 1s and 0s. If you don't know that, you better get your batteries recharged."

He made a stupid face and all the freshman girls laughed. It was tragic to see someone so eagerly hang a "kick me" sign across their backside. One of the GMNWO members bloodthirstily thrust a piece of chalk into my hand. That supreme symbol of exposition pushed me over the edge.

"No, you're wrong about that. The technique used for digital recordings is called saturation recording, and it is considerably different from the way you have been representing it. The format of the data recorded on the

medium is a function of the host system and varies from system to system, but the essence of saturation recording is current flow, not voltage levels as you imply. Let me show you how it works—we'll take this floppy disk as an example. The data is recorded in terms of bit cells in which the data is interleaved with clock pulses. By definition, each bit cell is the period between leading edges of clock pulses. Here's what a bit cell looks like." (See FIGURE 1.)

"That's just what I said! See—it's 1s and 0s."

"Control yourself. This is what the computer interprets, but the actual recording is something quite different. Can I continue? Each data bit has its own clock bit. Thus we refer to this type of recording as a frequency modulation (FM) recording. Data is written and read from the disk in serial form, and eight consecutive bit cells comprise a byte. The first cell is numbered 0, and the last is numbered 7. Therefore, when reading or writing, the most significant bit is transferred first. Look, here's a part of a bit stream, representing 10001001." (See FIGURE 2.)

"It still looks like 1s and 0s to me."

"Don't be naive. The standard FM encoding format can be altered to obtain modified, modified frequency

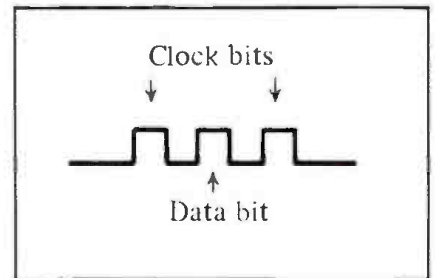


Figure 1. A bit cell, defined as the period between leading edges of clock pulses.

modulation (M²FM), which results in a doubling of the data transfer rate, to around 500 KBS. Error rate performance can be maintained through the use of phase locked loop data separators and write precompensation; most systems already incorporate these provisions. I'll explain that later, but first look at an M²FM data word, the same 10001001 as above (FIGURE 3). For FM, the data bits are always written in the cell center, and a clock bit always leads the cell. For M²FM, data bits are still written at the cell center, but there isn't always a clock bit. Specifically, a clock bit is written only if there isn't either a data bit or clock bit written in the previous cell or there is no data bit written in the

The next step in digital delay—434 m sec.

Introducing the DN700 from Klark-Teknik Research. This is the first of a new series of innovative microprocessor-controlled Digital Delay Lines with new and better price-performance ratio — bringing true professional performance in delay circuitry within reach of more users than ever before.

DN700 is a rack mounted 1-in 3-out unit giving easily adjusted delays up to 434 milliseconds, primarily for sound reinforcement applications. Features include non-volatile memory, an auto-diagnostic facility, and tamperproof lockout — with a minimum resolution of 26.5 microseconds.

Specification includes:
Frequency response +0.5 - 1.0dB 20Hz-15kHz
Dynamic range 20Hz-20kHz (unweighted). Better than 85dB
Distortion (THD) @ 1kHz + 10dBm <0.05% for any delay length.

The Klark-Teknik promise — a bigger investment in the future with:

1. Greater R&D investment, with 12% of all company personnel directly involved in new product development.
2. Consistent attention to production economies for professional performance at 'breakthrough' prices.
3. Effective Reliability Control during manufacture.

3 2 5
11 6 4



KLARK TEKNIK



British designed, British made



Manufactured by Klark-Teknik Research Limited
 Coppice Trading Estate, Kidderminster DY11 7JJ,
 England. Telephone: (0562) 741515 Telex: 339821

Klark-Teknik Electronics Inc.
 262a Eastern Parkway, Farmingdale,
 NY 11735, USA. Telephone: (516) 249-3660

Omnimedia Corporation Limited
 9653 Côte de Liesse/Dorval, Quebec H9P 1A3
 Canada. Telephone: (514) 636 9971

Circle 20 on Reader Service Card

THE BEST-DRESSED RACKS GO BY THE BOOK.

ALTEC LANSING— the choice of sound professionals for over 50 years.

1674—4-Channel Automatic Microphone Mixer shares gain among individual mics in multi-mic set-up. Increases gain of in-use mics, lowers others for hands-off mixing.

1678—8-Channel Automatic Microphone Mixer with same features as 1674.


1689—2-Channel Mono/Stereo Mixer/Preamplifier. Includes phantom power, mic and line level inputs.

1651—Single Channel Graphic Equalizer with 10 1-octave, active filter sections. Up to ± 12 dB boost/cut with center detented slide controls.

1652—Stereo Graphic Equalizer with same features as 1651 for each channel.

1268—Stereo Power Amplifier. 60+ watts/channel into 8 ohms 20 to 20kHz at less than .03% THD. 200 watts/mono. Optional line transformers for balanced input. Computer protection of amp and load.

1269—Stereo Power Amplifier. 120+ watts/channel, 400/mono, with same performance and features as 1268.

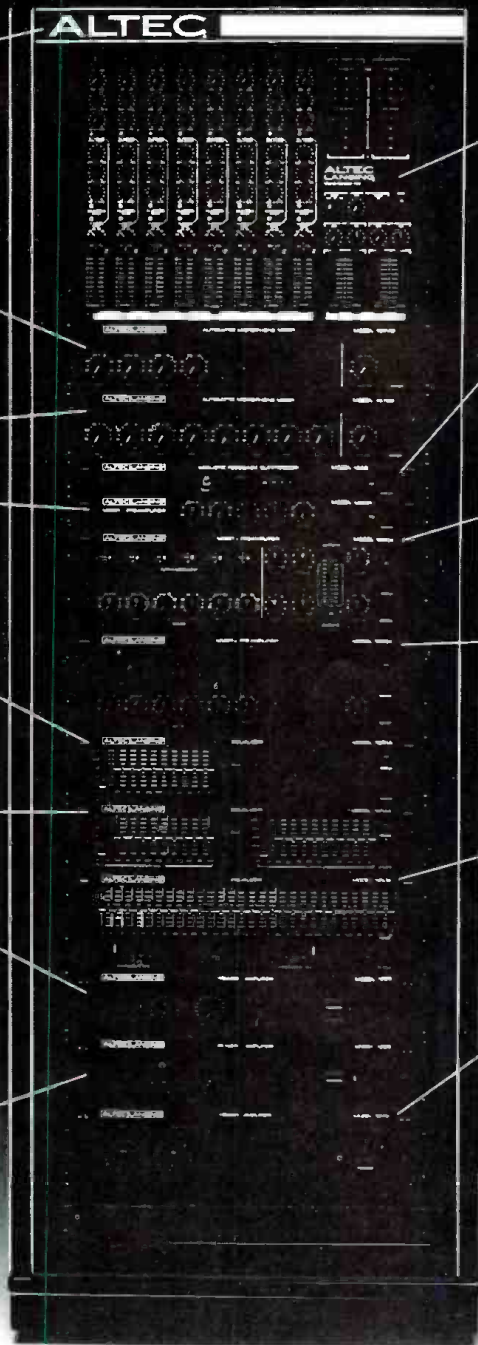

1690—8-Channel Stereo Mixer/Preamplifier for sound reinforcement, recording and mixdown. Linking connectors allow coupling additional 1690s for expanded versatility.

1620—Acoustic Feedback Suppressor automatically detects feedback oscillations, lowers gain and adjusts system to optimum level for hands-off feedback control.

1692—6 in, 2 out Mixer/Preamplifier. Each input with volume, gain, high pass, phantom power and optional remote volume control.

1699—6 in, 2 out Mixer/Preamplifier/Mixer Extender. "Link out" feature provides 12 independent channels when paired with 1692.

1653— $\frac{1}{3}$ -Octave Graphic Equalizer with 29 active filter sections, 25 to 16kHz. 18 dB/octave continuously variable high and low pass filters.

1270—Stereo Power Amplifier. 400+ watts/channel into 4 ohms, 800 into 8 ohms/mono. Computer circuits protect amp and speakers. Fan cooled. VI limiter helps the 1270 handle the toughest loads.

Altec Lansing's Black Rack Book—featuring Altec's new line of power amps, mixers, equalizers and related electronics. Precision-matched for optimum sound power and control, Altec's components work together for increased system efficiency and performance. For the ultimate in custom-tailored sound for your system, send the coupon to:

**ALTEC
LANSING**

Black Rack Book
P.O. Box 3113
Anaheim, CA 92803

Name _____

Address _____

City, State, Zip _____

Occupation _____

DB

Circle 21 on Reader Service Card

© Altec Corporation

previous cell. The phase locked loop data separator is synchronized to the data transfer rate and used to generate clock and data windows. Finally, in M²FM, the write oscillator is doubled, so the bit cell size is halved. A 77 track floppy disk would contain 41,300 bits per track with FM, and 82,600 bits per track with M²FM. That's a lot of data, but only enough for a few seconds of music. That's why digital audio machines use spools of tape, hard disks or video transports—more storage room. For example, the 3M digital machine records about 890,000 separate bits of

"The next question is that of the head itself. Shugart drives use a single element read/write ceramic head with straddle erase elements to provide erased areas between data tracks. When writing, the erase head erases the outer edges of the track to maintain the track width of .012 inch; this improves signal-to-noise ratio and helps disk interchangeability. Data itself is never actually erased—it is merely written over. The head is mounted on a carriage, perpendicular to the disk, and moved along the disk surface by a three phase stepper motor, logically

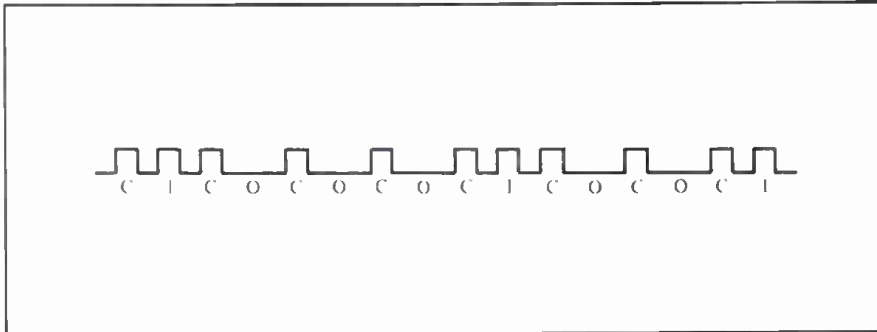


Figure 2. Part of a bit stream, representing 10001001.

information on every square inch of magnetic tape. At a speed of 45 inches per second, a transfer rate of 40 million bits per second is achieved.

controlled to access each of the data tracks on the disk. The head is loaded against the disk by a head load solenoid. The read/write head contains three

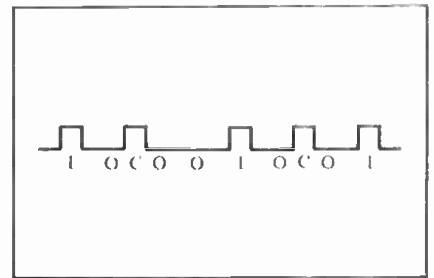


Figure 3. An M²FM data word, using the bit stream represented in Figure 2.

coils, the read and write coils are wound on a single center-tapped core, and the erase coil is wound around a yoke spanning the track. They are connected something like this (FIGURE 4).

"In the write mode, the erase coil is energized to trim the track and each bit is written to alternate read/write coils.

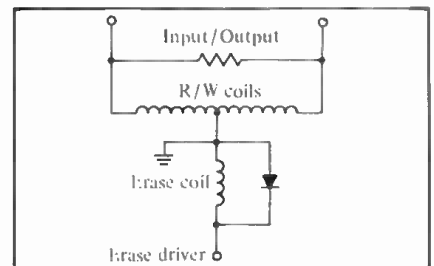


Figure 4. Read/Write head of a Shugart drive.

In times like these
it's good to know

**The first
duplicator
Garner sold
is still at
work...20
years later.**




4200 N. 48th Street Lincoln, NE 68504
Phone: (402) 464-5911 Telex: 438068

And It Looks Like It's Going to Work Another 20

Twenty years ago, Garner Industries manufactured their first high-speed professional dubbing machine. Twenty years later, that machine is still at work making hundreds of dubs a day. In times like these when every dollar counts, it's nice to know that Garner is still building duplicators to last, and we've made some improvements along the way. The Garner 3056 and Garner 4056 cost much less, take up less space, use less power and require far less maintenance than other duplicating machines on the market today. And the new Garner duplicators offer advantages that our first duplicator didn't have:

- Fast 60 ips speed
- No wow/flutter added because of a common capstan drive
- Simplified tape loading
- Long-life modular electronics
- Solid-state modular electronics
- Smooth, quiet operation
- Three-year mechanical warranty.

When you consider the cost of a duplicator, consider what you'll be getting for your dollar. If you want all of the state-of-the-art features in a product that's practically indestructible, then Garner has your machine. The only problem is, if you buy one of our duplicators, you may never need another duplicator.

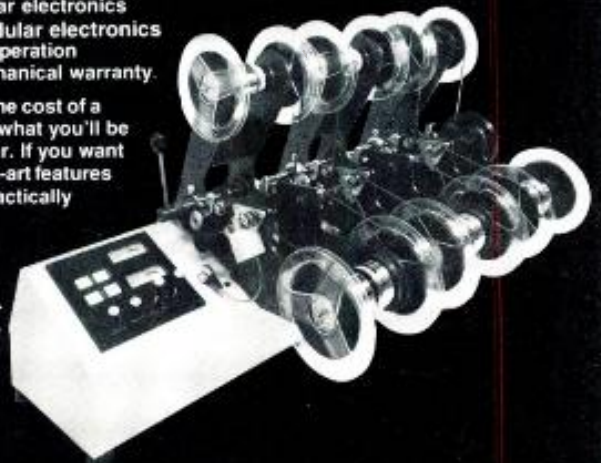

Dependability... Guaranteed

MICROPHONES!

At long last, all the questions you ever asked...all the problems you ever grappled with...are answered clearly and definitively!

The Microphone Handbook

In 256 fact-filled pages, liberally sprinkled with over 500 illuminating photographs, drawings and diagrams, John Eargle covers virtually every practical aspect of microphone design and usage.


Completely up to date, this vital new handbook is a must for any professional whose work involves microphones. Here are just a few of the topics that are thoroughly covered:

- Directional characteristics—the basic patterns.
- Using patterns effectively.
- Microphone sensitivity ratings.
- Remote powering of capacitors.
- Proximity and distance effects.
- Multi-microphone interference problems.
- Stereo microphone techniques.
- Speech and music reinforcement.
- Studio microphone techniques.
- Microphone accessories.
- And much, much more!

THE MICROPHONE HANDBOOK. You'll find yourself reaching for it every time a new or unusual problem crops up. Order your copy now!



JOHN EARGLE, noted author, lecturer and audio expert, is vice-president, market planning for James B. Lansing Sound. He has also served as chief engineer with Mercury Records, and is a member of SMPTE, IEEE and AES, for which he served as president in 1974-75. Listed in *Engineers of Distinction*, he has over 30 published articles and record reviews to his credit, and is the author of another important book, *Sound Recording*.

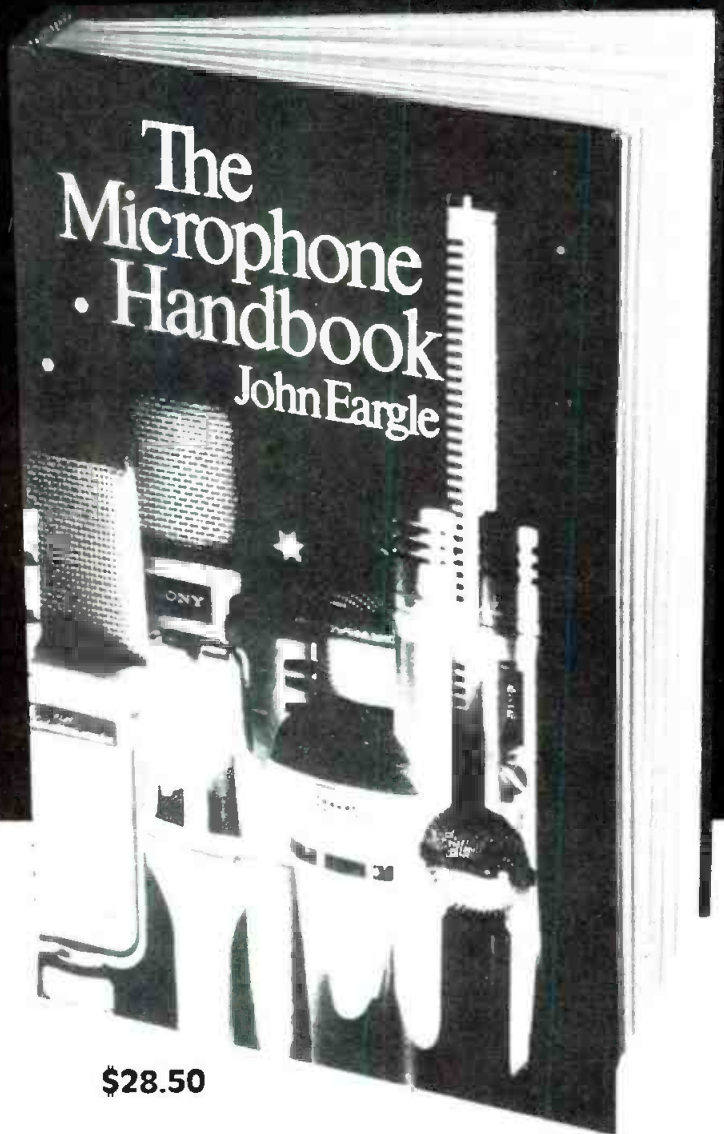

\$28.50

ELAR PUBLISHING CO., INC.

1120 Old Country Road, Plainview, NY 11803

Yes! Please send _____ copies of **The Microphone Handbook** @ \$28.50 per copy. (New York State residents add appropriate sales tax.)

Payment enclosed.

Or charge my MasterCard Visa

Acct. # _____ Exp. Date _____

Name _____
(please print)

Address _____

City _____

State/Zip _____

Signature _____

Outside U.S.A. add \$2.00 for postage. Checks must be in U.S. funds drawn on a U.S. bank.

If you aren't completely satisfied, you may return your copy in good condition within 15 days for full refund or credit.

FEEDBACK

BANK 1

HALLS

BANK 5

SPLITS



CHORUS & ECHO
BY PROGRAM 1

DELAY



POWER

LEXICON's NEW 224X with LARC Its only limit is your imagination

Only Lexicon's 224X does it all. And now the 224X comes with LARC—the key that gives you easy access to the *total* capabilities of the most powerful processor in the world.

LARC (Lexicon Alphanumeric Remote Console) tells at a glance where you're at . . . which *family* of programs you're into . . . the *specific* program selected . . . plus the variations *within* the program. They're all spelled out on LED displays. And, with LARC, you can now store your setups on audio cassettes.



Unique Split Reverb/Effects

Achieve two levels of effects *simultaneously*—either two reverberations or reverberation combined with effects.

Each input can be processed independently, with different effects, and for each input there are stereo outputs. Split reverb puts the processing capabilities of two systems into one. Only Lexicon has it.

Unparalleled Sound Quality

Unquestionably the best! Lexicon digital reverberation programs are the most mature in the industry, repeatedly acclaimed by users and reviewers.

Full 15-kHz bandwidth, 84-dB dynamic range, and less than 0.07% distortion.

Unmatched Versatility

Hall, Plate, and Room/Chamber algorithms, including a Small Room program for subtle acoustic enhancements and film/video work. More than 30 preprogrammed variations (with more to come).



Superior controls. Decay time in two frequency bands . . . crossover . . . high-frequency rolloff . . . apparent listener position . . . predelay . . . internal chorus . . . diffusion. And early reflections provide exceptional control over the initial sound.

Dynamic decay. Special signal processing capabilities can change reverb time in response to program dynamics.

Comprehensive delay effects. The most extensive set of time-delay functions available. Put in a vocal track and get out six independent voices. Create phasing, flanging, and, repeats in a single pass. Put in a rhythm track and get out syncopated chords. Use up to six separately adjustable delay taps, with up to 1860-ms delay, each with high-cut and low-cut filters tunable from 170 Hz to 19 kHz.

36 nonvolatile memories. All parameters of setups can be stored in memory for instant recall—and can be archived on cassette tape.

An Investment in the Future

Your investment in a 224X with LARC is an investment that will pay big dividends today—and tomorrow. Your initial purchase price buys you all software updates, subject only to a small media charge.

Look into the Lexicon 224X digital reverb/effects system with LARC*. Compare it with anything else on the market. You'll find this superb system is, by far, the most powerful of them all.

*Field conversion is available for owners of existing 224X systems. Contact Lexicon.

lexicon

Lexicon, Inc., 60 Turner Street, Waltham, MA 02154/(617) 891-6790/TELEX 923468
Export: Gotham Export Corporation, New York, NY 10014

Circle 23 on Reader Service Card

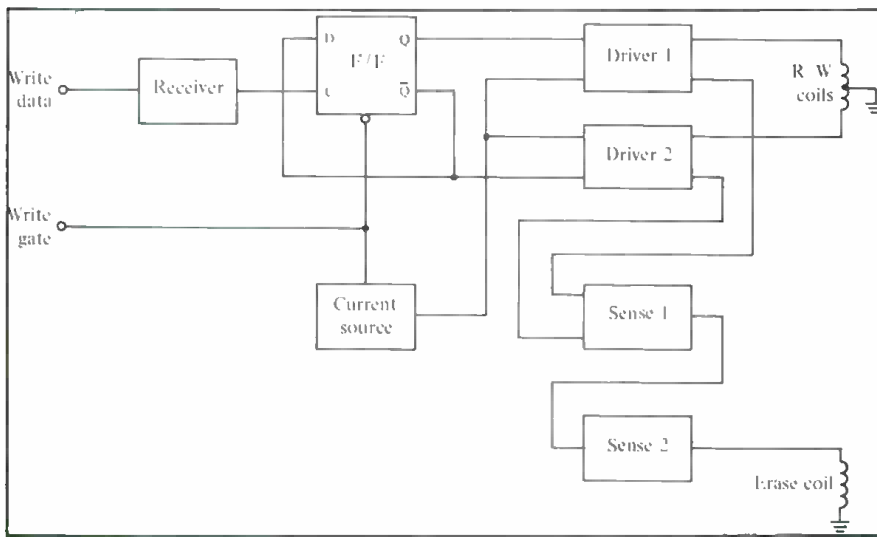


Figure 5. Write circuitry.

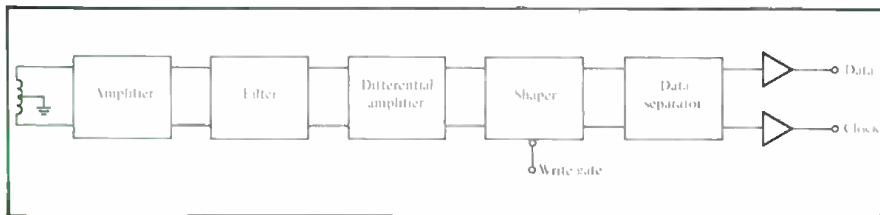


Figure 6. Read circuitry.

thus changing the direction of current flow through the head. As I mentioned before, this also erases old data. Look at this drawing (FIGURE 5). Write data cells are supplied by the host system and cause the write data trigger flip flop to toggle between the two write drivers. Thus current is alternately applied to each half of the read/write head. The write gate, from the host, clocks the flip flop and subsequently supplies write current; when write current is sensed flowing to the write drivers, a signal is generated to provide erase coil current.

"In the read mode, current is induced into the gap and one of the coils of the read/write head as the disk passes underneath, thus generating a voltage.

When the next bit passes by, a current is induced in the other coil, causing another voltage pulse. The read circuitry looks like this (FIGURE 6). When the head is loaded, and the write gate is inactive, the read signal is amplified, de-spiked, and fed to a differential amplifier. With FM, a clock pulse occurs every four microseconds, and once every two microseconds when logical one data is present. Thus, the frequency of the read data varies. Specifically, the read signal decreases as the frequency increases. The shaper squares the sine waves from the head into equal amplitude pulses. The data separator, referencing two time constants, creates two data windows to distinguish between clock and data

pulses. When the previous bit cell had a data pulse, a short window of 2.9 microseconds is used; the long window of 3:1 microseconds is used when the previous cell had no data. The clock window takes up the remainder of the cell time, 1.1 or 0.9 microseconds. The separated clock and data pulses are fed to drivers, and back to the host computer.

"Finally, the essence of the recording method can be explained. Shugart and other floppy manufacturers use the non return to zero (NRZI) ASCII recording technique. Its simplicity is beautiful. The read/write head is a ring with a gap and a coil; in the write mode, current flows through the coil, flux induced in the ring fringes at the gap, and this flux magnetizes the magnetic surface passing underneath. During a write operation, a bit is recorded when the flux direction is reversed by reversing the current in the coil. Hence the flux on the disk magnetic surface instantaneously changes polarity. It is this flux reversal that represents a bit on the disk.

"When reading, the disk flux reversal reverses the ring flux, and therefore the current induced into the coil. The gap first passes over an area that is magnetized in one direction, and a constant flux flows through the ring and coil. When a recorded bit passes underneath, the flux in the ring and coil makes a 180 degree reversal. It is this flux reversal in the coil which ultimately causes the voltage output pulse. Look—it's obvious when you look at a head, and its timing diagram (FIGURE 7). You see, there's no carrier, no bias signal, just the signal itself at any given instant in one of two states—full positive or full negative. The current flow through the head alternates direction, and we pass enough current through the head to magnetize the medium as much as it can be; the magnitude of the recorded signal is that corresponding to saturation of the medium. The data is stored in terms of zones of constant magnitude, and it's the reversals between zones which actually embody the data. It's totally obvious—but not at all like you were describing it."

A PYRRHIC VICTORY

I put down my chalk, still hot from my professorial high, and looked up from the table's scribbled diagrams. The members of the GMNWO were slumped over the table, blitzed, surrounded by empty dark Beeks' beer bottles. The girls were gone. The know-it-all had moved on to another table; over the hubbub I could hear him explaining to somebody how EPROMs work—his description was totally off the wall. But I was vindicated; I felt secure in the knowledge that I had stated the facts. It isn't 1s and 0s. It's + and -. That's a big difference. ■

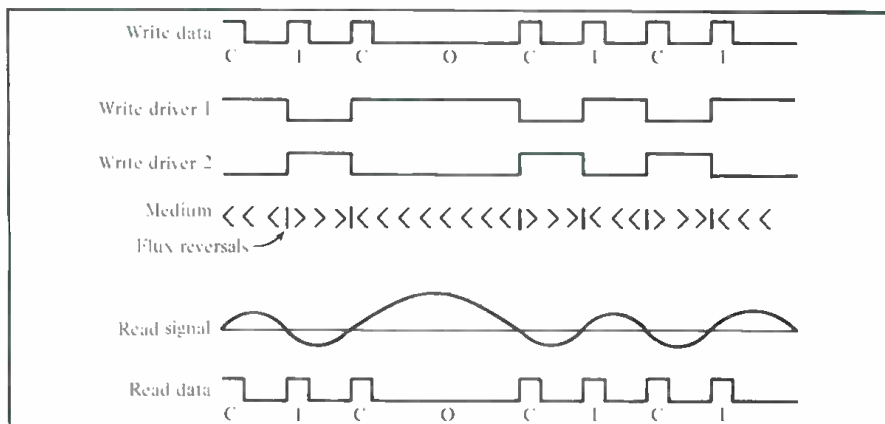


Figure 7. Read/Write data and timing diagrams showing the effects of flux reversal.

Sound Reinforcement

Microphones in Sound Reinforcement

Ed. Note: Due to an editorial lapse (read a few too many three martini lunches), Part III of John Eargle's column on microphones ran before Parts I and II. Therefore, disregard everything you read in last month's column until December. At that point, take your September issue out of your db binder (you do have one, don't you?) and voila, you're in sequence. Sounds simple, huh?

• Thus far in our coverage of sound reinforcement, we have concentrated on loudspeakers and environmental conditions. In this and the next couple of columns we will deal with that very important first element in the electro-acoustical system, the microphone. This month, our discussion will cover microphone specifications, including sensitivity, noise floor, dynamic range and operating impedances.

SENSITIVITY RATINGS

Unfortunately, there are quite a few ways of indicating the sensitivity of a microphone—many of them going back to a much earlier era in our industry.

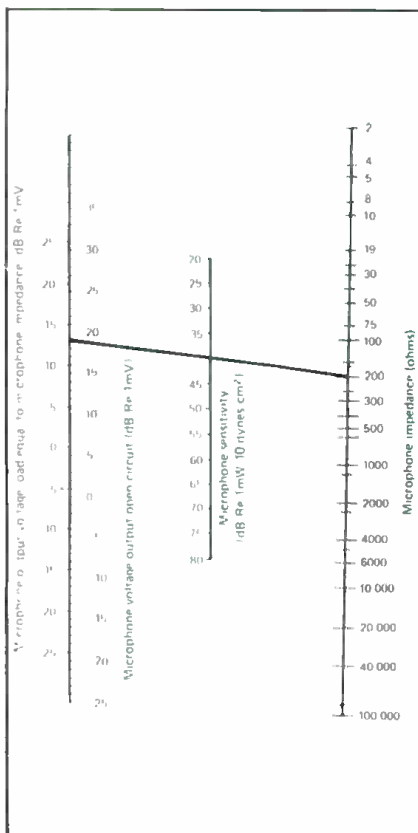


Figure 1. Nomograph of microphone impedance, output power, and voltage level.



“Now You Can Afford to Delay . . .”

by Deltalab

The ADM 310 unit offers 310ms in 10ms increments at *full power bandwidth* (20Hz to 20KHz) with greater than 90dB dynamic range.

A true digital delay product with exceptionally natural sound quality, for applications where one or even a dozen delays, via serial and parallel coupling, are needed. Unobtrusive sound reinforcement in churches, theatres, and function rooms; pre-reverb delay in studios, and special effects such as simple doubling and echo. **SUGGESTED RETAIL. \$599**

For more information, contact:



DeltaLab Research, Inc.
27 Industrial Ave.
Chelmsford, MA 01824

The Audible Difference!

Perhaps the simplest method is that which has been adopted by many of the European manufacturers.

Taking an example from a Neumann specification sheet, the sensitivity of the KM 83i capacitor microphone is given as:

$$7 \text{ mV/Pa} \pm 1 \text{ dB.}$$

What this means is that when the microphone is placed in a sound field of one Pascal, which is 94 dB SPL, the open-circuit output voltage is 0.007 volts, ± 1 dB. Since most microphones operate essentially unloaded, this value will be quite accurate in any subsequent calculations of system gains and losses which might be made.

Now, let us look at the sensitivity rating of the Electro-Voice 635A dynamic microphone. It is given as

$$-55 \text{ dB} \text{ (} 0 \text{ dB} = 1 \text{ mw/10 dynes/cm}^2\text{)}.$$

Since this specification gives us the power output of the microphone in a given sound field, we must relate that power to a particular impedance if we are to find the actual voltage output. The published impedance is 150 ohms.

First, let us look at the sound field the microphone is placed in. Fortunately, 10 dynes/cm² is the same as one Pascal. (Note that the Europeans have converted to SI units, while EV, and many other US companies, still make use of CGS units.)

The power (P) corresponding to -55 dB can be solved for from the following equation:

$$10 \log P/.001 = -55 \text{ dB.}$$

Rearranging and solving for P, we get:

$$P = 3.16 \times 10^{-9} \text{ watts.}$$

This is a very small power indeed, and now we wish to find the voltage across 150 ohms which gives us this power:

$$E = \sqrt{(3.16 \times 10^{-9} \times 150)},$$

Solving:

$$E = 0.6 \text{ mV.}$$

This is the voltage which exists when the microphone is loaded with 150 ohms and placed in a sound field of one Pascal.

Now, let us unload the microphone so

that we can compare it directly with the KM 83i. When we remove the load, the output voltage will increase 6 dB in level; that is, it will double to a value of 1.2 mV. It is not as sensitive as the capacitor microphone, since it is a passive device. On a voltage basis, it is some 15 dB lower in output than the capacitor microphone.

The nomograph shown in FIGURE 1 will enable the user to make the above calculation by inspection. Note, however, that the output voltages, loaded as well as unloaded, are given in dB levels relative to one millivolt.

In using sensitivity specifications, the designer takes into account the maximum levels that will exist at the microphone and calculates the voltages which will correspond to these. The overload voltage to the input stage is noted, and care must be taken that the voltage from the microphone will not exceed it. If there appears to be a problem here, then some kind of input padding must be used to cut down on the microphone's output voltage. Many capacitor microphones have switchable pads, usually 10 or 15 dB, that effectively reduce their voltage to the same range as that of a dynamic microphone, and the problem is usually avoided.

We will not discuss here the rather archaic EIA method of rating microphone sensitivities, since it is not encountered often these days.

MICROPHONE NOISE RATINGS

Normally, the effective noise level of a dynamic microphone will not be stated. On occasion, you will see a rating which states the hum susceptibility of a dynamic microphone when it is placed in a reference magnetic field. Such ratings are rare, since good shielding is almost taken for granted these days.

All professional-grade capacitor microphones will have a noise rating. Most of these state the equivalent level that would be generated if the microphone were placed in a stated A-weighted

sound field. For example, a noise rating of 17 dB(A) indicates that the microphone has an electrical noise floor equal in level to that of a perfect (noiseless) microphone placed in a sound noise field of 17 dB as measured on the A-scale of a precision sound level meter. FIGURE 2 shows the A-weighting curve used for these measurements.

A knowledge of the noise floor of a microphone will determine its applicability in certain kinds of work. For example, the recording of fairly quiet instruments in very quiet environments at some distance may tax the noise performance of many otherwise good capacitor microphones. Typically, those microphones with smaller diaphragms will have higher noise floors than those with larger diaphragms. As a rule, we will not encounter these problems in sound reinforcement.

DYNAMIC RANGE OF MICROPHONES

The dynamic range of a microphone is set by the noise floor at one end and by some arbitrary distortion rating at the other end. A distortion rating of 0.5 percent Total Harmonic Distortion is usually taken as the upper limit. Thus, if a capacitor microphone has a noise floor of 17 dB(A) and reaches a distortion of 0.5 percent at a level of 120 dB SPL, then its overall dynamic range will simply be the difference between these ratings, or 103 dB. Thus, a good microphone will have a dynamic range greater than even the best digital recording systems in use today.

Since they are active devices, capacitor microphones will overload rather abruptly when the maximum rated level is reached. Dynamic microphones, on the other hand, do not usually carry a maximum sound pressure rating, since their linearity extends well beyond the normal sound levels they are expected to be used in. Certainly for most applications in sound reinforcement, they will be picking up sounds that lie well within their useful dynamic range.

IMPEDANCES

Nobody interested in professional sound reinforcement work should bother with high-impedance microphones. The term *low impedance* usually implies that the microphone has a source impedance anywhere from 50 to 200 ohms. In most mixer inputs encountered today, these microphones will see an input impedance usually about ten times that of their source impedance, and thus we can say that they are effectively operated "open circuit."

Most capacitor microphones will state the minimum impedance into which the microphone should work. Dynamic microphones can of course be operated into a matching load. ■

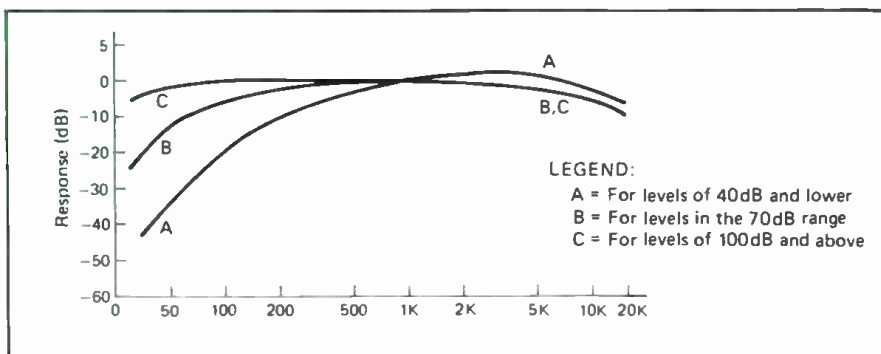


Figure 2. Weighting curves for sound level measurements of (A) 40 dB and lower, (B) in the 70 dB range, and (C) 100 dB and higher.

Sound With Images

Stereo and High Definition TV Update

• It's been almost a year since I reported to you on the status of stereo TV broadcasting in the United States. I stress the word *broadcasting* since, for some time now, cable operators have been supplying high-quality stereo sound to their subscribers using a variety of systems, most of them involving the use of an FM stereo receiver or tuner as an adjunct to the TV set. Cable operators, after first receiving the audio signals from satellite downlinks, translate the left and right recovered audio signals to a composite stereo multiplex signal similar to that used in stereo FM broadcasting. They then use that signal to frequency-modulate a carrier that is piped down their cable to subscribers. The frequency selected for this carrier is one which falls in the regular FM fre-

quency band, between 88 and 108 MHz. In short, from the subscriber's point of view, TV stereo today is no different from simulcast broadcasts which are initiated by some TV stations in partnership with existing FM stereo stations, where both a TV receiver and an FM stereo tuner or receiver are required to receive the programs in stereo sound.

It is now nearly five years since Japan began broadcasting TV stereo using a system developed by NHK, the Japanese broadcasting authority. That system uses (L + R) and (L - R) matrixing, in which the (L + R) (mono equivalent) is transmitted on the regular main audio RF carrier, using FM modulation, while the difference information (L - R) is used to *FM modulate* a sub-carrier which is set at twice the hori-

zontal line frequency, or at around 31.5 kHz. In this country, that same system has been proposed by the EIAJ (Electronic Industries Association of Japan). A Multi-Channel Sound Committee, under the administration of the Electronic Industries Association (EIA), has been working for several years to develop a technical record concerning the performance of this basic system as well as of two other transmission systems: one by Zenith Radio Corporation, the other by a small Chicago firm called Telesonics, Inc. Both of these latter systems employ an *AM Sub-carrier* rather than the frequency-modulated sub-carrier proposed by EIAJ and used in Japan. Furthermore, all three U.S. proposals make provision for a so-called S.A.P. (secondary audio program) channel, which might take



UNCOMPROMISING WIRELESS MICROPHONES

Finally, you can choose a wireless mic to fit the application. The Telex WHM-300, the electret wireless transmitter mic for uncompromising speech clarity. Or a Telex WHM-400 dynamic wireless transmitting mic for vocal entertainment with rich, full bodied audio quality. Both elegantly tapered and without trailing antenna wires. Or select the miniature electret WLM-100* lavalier mic (or any standard dynamic mic) with our belt-pack transmitter.

Combined with the superb Telex dual diversity* FM receiver, you'll have a wireless system that is as good as any hard wired mic, and at a reasonable price. Write us today for full details.



Quality products for the Audio Professional



TELEX COMMUNICATIONS, INC.

9600 Aldrich Ave. So. Minneapolis, MN 55420 U.S.A.
Europe: Le Bonaparte Office 711 Centre Affaires Paris Nord 93153 Le Blanc Mesnil France

*U.S. Patent No. 4293955 Other patents applied for.

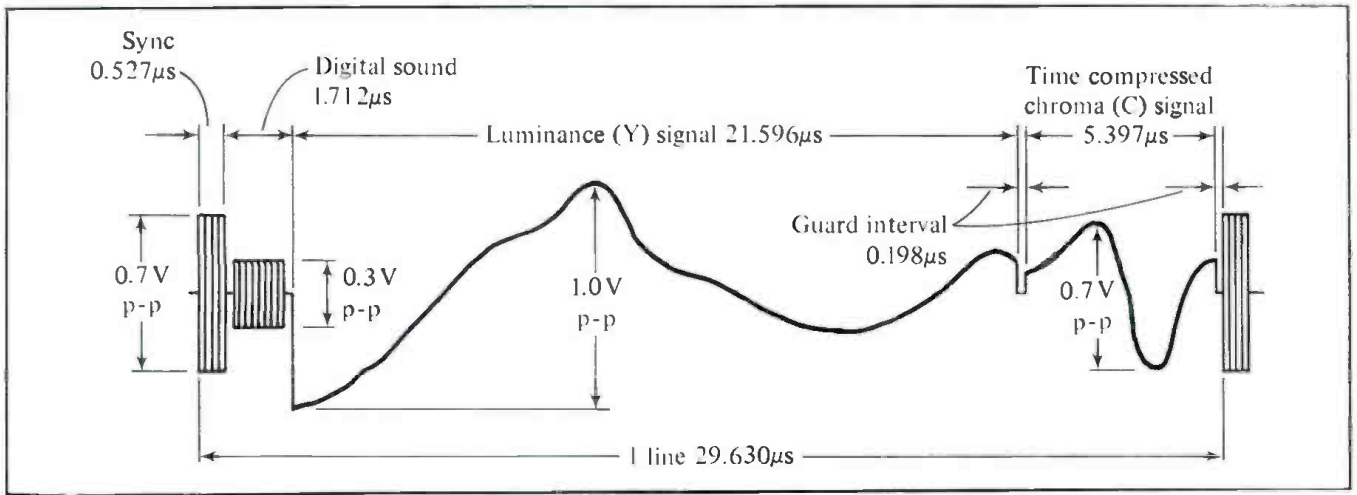


Figure 1. The method NTT and NHK propose to compress high-definition video and digital audio signals into a limited bandwidth channel of 15 to 20 MHz.

the form of a second-language transmission in metropolitan areas that are heavily populated by non-English speaking minorities, or might be used for totally unrelated audio material.

Further complicating the selection process is the established need for some form of companding to compensate for the degradation in signal-to-noise (for all three transmission systems) when stereo audio is transmitted. In the

case of FM stereo, this loss of S/N can amount to as much as 23 dB under weak-signal conditions. The situation is not quite as bad in TV audio; an average loss of S/N amounts to 15 dB when the switch is made from mono to stereo. However, it must be remembered that TV audio has a 10 dB disadvantage to begin with, since maximum frequency deviation of the main audio channel in the NTSC

system of TV transmission is 25 kHz, as opposed to the maximum modulation of 75 kHz in the case of FM stereo.

There are now five separate proposals for companding (noise reduction) systems to compensate for this loss of signal-to-noise ratio. These, too, must be thoroughly tested by the committee, who are going about their task by conducting a series of listening tests using experienced auditors.

Looking for a Distortion Measurement System?

The Amber model 3501 is quite simply the highest performance, most featured, yet lowest cost audio distortion and noise measurement system available.

It offers state-of-the-art performance with THD measurements to below 0.0008% (-102dB), maximum output level to +30dBm and noise measurements to below -120dBm.

It has features like automatic operation, optional balanced input/output and powerful IMD measurement capability. It includes comprehensive noise weighting with four user changeable filters. Unique features like manual spectrum analysis and selectable bandwidth signal-to-noise measurements.

The 3501 is fast, easy to use and its light weight and small size make it very portable. It can even be battery powered.

And the best part is that it is 20% to 50% below what you would pay elsewhere for less performance. The Amber 3501 starts at \$2100. Send for full technical details.



Amber Electro Design Inc.
4810 Jean Talon West
Montreal Canada H4P 2N5
Telephone (514) 735 4105

amber

Circle 25 on Reader Service Card

PRESENT TIMETABLE FOR TV STEREO

If all goes according to plan, a final report should be available for submission to the FCC by late fall of 1983—perhaps even by the time you read this. The hope is that this report will recommend a single, specific system—that is, a combination of one of the three proposed transmission systems and one of the five proposed companding systems. This will be a departure from previous EIA Committee practices which, in the past, have simply presented comprehensive data to the FCC and waited for that regulatory body to choose “the best system.”

In recent years, the FCC has done a complete about-face and is now in a mood of deregulation. This was amply demonstrated when the FCC refused to choose one of five proposed AM stereo systems, preferring instead to “leave it up to the marketplace.” This so-called “marketplace” decision has resulted in a failure of AM stereo to get off the ground, much to the disappointment of AM broadcasters and receiver manufacturers. To forestall such an event from occurring in the case of TV stereo, the Committee hopes that by sending a specific recommendation to the FCC, the system chosen will become a de facto standard even if the FCC goes “marketplace” again—as they are expected to do.

The timetable is very critical, however, from a legal point of view. Once the FCC opens a Docket in the matter (expected, at the latest, in September 1983), there may be a response period of as little as 90 days. Shortly after that, the FCC might well issue its report-and-order, setting broad parameters for TV stereo audio and, again, leaving the choice of a final system up to the marketplace and the competitive free-enterprise system. As of that moment, it would become illegal for the various proponents to sit together in committee as they are now doing; that would constitute a violation of the anti-trust laws of the United States. It's for this reason that the EIA MTS Committee is pushing hard to complete its work before the end of 1983; and that need to complete the multi-channel TV report in short order could hasten the day when TV stereo broadcasting is finally initiated in this country.

HIGH DEFINITION TV IS MAKING PROGRESS, TOO

While we get ready to improve the sound quality of TV broadcasting, Japan is off on another project aimed at improving the picture quality of TV. For at least three years now, several Japanese companies have successfully demonstrated so-called high-definition TV, which generally involves pictures having 1125 lines and an aspect ratio that's closer to that used in wide-screen

motion pictures. The pictures are literally as sharp as those projected from 35 millimeter film, which means that they particularly lend themselves to large screen projection TV displays. Such large screen TV, of course, would fit in very nicely with the coming of stereo audio for video, since there are still many who feel that wide separation in audio for TV, coupled with relatively small-screen viewing, may prove disconcerting to many viewers.

While closed-circuit demonstrations of high-definition TV have been extremely effective and impressive, the problem remained as to how to trans-

mit such video information from the TV studio to the viewer's home receiver. Once again, NHK of Japan seems to be at the forefront of research—this time directly aimed at solving the bandwidth problem involved in HDTV. The network had originally hoped to get on the air using transmission channels in the 12 GHz band, but so far such allocations have not been granted to it. Had NHK been able to transmit in that frequency range, the full 30 MHz bandwidth (per channel) needed for 1125 line TV would have been no problem. As matters stand, NHK is working on various approaches to squeezing down the

ANT Telecommunications, formerly AEG-TELEFUNKEN Telecommunications, is pleased to announce a special promotional loaner program for qualified disc mastering facilities. For more information, please contact Martin Munzer at Solway, Inc.*

The Analog Bytes Back...

The telcom challenge to Professional Digital Recorders

telcom c4 challenges professional digital recording systems to offer for the same price:

- half the dynamic range of telcom c4,
- comparable servicability,
- similar standardisation,
- interchange ability and
- last but not least the telcom quality of natural sound.

Take an existing analogue recorder (two track or multi track), add telcom c4 and listen to the results! telcom c4 is the exceptional compander. Only this noise reduction system surpasses digital without the cost of completely new equipment and problems usually associated with implementation. New technology. telcom c4 creates improved headroom, and high frequency resolution; lower distortion from tape, better crosstalk attenuation plus a 30dB gain in dynamic range.

\$650.00 per card*

telcom c4 is used in connection with ATR's, VTR's, line and satellite transmissions. telcom c4 in its new format will fit your standard noise reduction frame. Find out more about telcom and how you can make the telcom test.

*Price is subject to change

Contact: Solway Inc., P.O. Box 7647, Hollywood, FL 33081. Tel: (305) 962-8650, Telex 467257

ANT
Nachrichtentechnik
Lindener Str. 15 D-3340 Wolfenbüttel
Phone (05331) 83-1 Telex 95651 ant d

*This is a limited offer subject to cancellation at any time.

Circle 26 on Reader Service Card

LOW LEVEL INPUT TRANSFORMERS

For Microphones/ Transducers



Control and Instrument Amplifier Applications
Excellent magnetic ESS shielding
Response 30-20 KHz +1db
Turns Ratio 1:1 thru 1:20

Single Threaded Stud Mounting

MICROTRAN S101-Sp

Equivalent to Imported European Studio Grade Transformers



COMPLETE SPECIFICATIONS AND PRICE SHEET AVAILABLE

Complete Catalog line of

AUDIO-POWER COMMERCIAL-MIL TRANSFORMERS

IMMEDIATE DELIVERY FROM DISTRIBUTORS



IMMEDIATE DELIVERY FROM DISTRIBUTORS

MICROTRAN
COMPANY, INC.

145 E. Mineola Ave., Box 236, Valley Stream, N.Y. 11582

Circle 27 on Reader Service Card

you write it

Many readers do not realize that they can also be writers for **db**. We are always seeking meaningful articles of any length. The subject matter can cover almost anything of interest and value to audio professionals.

You don't have to be an experienced writer to be published. But you do need the ability to express your idea fully, with adequate detail and information. Our editors will polish the story for you. We suggest you first submit an outline so that we can work with you in the development of the article.

You also don't have to be an artist, we'll re-do all drawings. This means we do need sufficient detail in your rough drawing or schematic so that our artists will understand what you want.

It can be prestigious to be published and it can be profitable too. All articles accepted for publication are purchased. You won't retire on our scale, but it can make a nice extra sum for that special occasion.

bandwidth required. In one approach, a "frame memory" at the receiving end would convert conventional moderately-high-definition interlaced signals into line-sequential signals. Instead of using every other 1/60th of a second field to show alternate lines of the 1125 lines that make up a high definition picture, the proposed receiver would display fewer lines—perhaps 875—but would display all of them sequentially in every field scanned. It has been shown that the perceived resolution of a line-sequential video display is about one and a half times better than that of an interlaced display, given the same total number of lines.

At the transmitting end of the system, NHK would convert 1125 line high-definition video signals into the required 875 lines by using equipment similar to that employed to convert European (PAL System) 625-line pictures into 525-line pictures now seen in the U.S. and Japan. The luminance signal (brightness) bandwidth for an 875-line picture works out to be around 15 MHz. By compressing the chroma signal by a factor of four-to-one, it is possible to maintain a total bandwidth for both the luminance and color signals of no more than 15 MHz, or half the bandwidth that would have been required for a full 1125 line high-definition TV picture. This sort of compression, called time-compression multiplexing, can be done because the luminance signal occupies only about 73 percent of the time allocated to each transmitted line. Normally, the chroma signal could not fit into the remaining time on each line, because it occupies and fills the same time slot as the brightness or luminance signal. The chroma signal's maximum frequency, however, is only 5 MHz, so if its *time axis* is compressed by a factor of four-to-one, it can be appended to the end of each scanned line.

To accomplish this type of bandwidth compression, the chroma signal is first converted into a digital signal and stored in a digital memory. Then it is read out of memory at a clock rate that is four times as fast as that used for sampling the analog signal and finally converted back to the compressed analog format.

FIBER OPTICS FOR HDTV TRANSMISSION

Another quasi-governmental agency in Japan, the Nippon Telegraph and Telephone Public Corp. (NTT), has found a practical way to transmit high-definition video signals through optical fibers directly to the homes of future telephone subscribers. In one approach to such a system, all channels in a new type of "CATV system" would be switched at the local telephone exchange. While trunk transmission would be digital on the optical fiber that would connect subscribers to exchanges, transmission would be analog.

In this system, NTT engineers would squeeze the normally required 30 MHz bandwidth (luminance, chroma, sound and sync) into the 20 MHz bandwidth required by the luminance signal alone, using the time-compression multiplexing technique described earlier. In the case of the NTT system, ample time remains on each line for a time-compressed PCM (pulse-code modulated) digital audio signal with a clock rate of about 15 MHz, as well as for a sine-wave sync signal. FIGURE 1 illustrates the various signal components of a single line of compressed video and audio information.

Although the U.S. led the way in TV broadcasting, it is clear that other industrialized nations of the world are fast catching up with us and even surpassing us in the field of entertainment electronics. I can clearly remember when my good friend William Halstead, a noted consulting engineer, was called upon by the Japanese government way back in the 1950s to help them get started in TV broadcasting. For better or worse, Mr. Halstead steered NHK into the NTSC system, the same system that we are straddled with in the U.S.; Europe opted for the higher resolution PAL system. As far as I know, NHK never complained to Mr. Halstead or questioned the wisdom of his choice. Perhaps this advanced work in high-definition TV is their "inscrutable way" of getting back at us for talking them into the NTSC system in the first place. ■

Help bring
the world
together,
one friendship
at a time.



Be a host family.

Discover how you can become a volunteer host family in International Youth Exchange.

Write: YOUTH EXCHANGE
Pueblo, Colorado 81009

Ad The President's Council for International Youth Exchange and The Consortium for International Citizen Exchange.

Digital Audio

Applications of Re-sampling

• During the last two months, we have presented the basis for building a digital re-sampler. This is a device that converts a sequence of digital audio data samples from one frequency to another. We demonstrated that the basis for this approach is that of creating an internal sampling frequency which is the least common integer denominator of the two frequencies. For example, to convert from 50 kHz to 40 kHz requires us to find a frequency such that the 5:4 are integers. This would be 200 kHz. As the ratios become more irrational, the internal frequency becomes higher and higher. Thus, the conversion from 44.1 to 48 kHz results in a ratio of 147:160. The effective internal frequency is thus 7.056 MHz. This is rather high for most hardware.

A second more interesting issue is that of clock synchronization. The rate at which numbers pop out of the re-sampler is fixed based on the internal divider ratios. However, the absolute time is not fixed. In the above example, there will be 160 input numbers at 44.1 kHz for every 147 numbers at 48 kHz. This rate is unambiguous, but there is no implicit mechanism for creating the output clock. Consider the issue in the following terms. When the 1st (nominal) input sample enters at 44.1 kHz, we define the 1st (nominal) output sample at 48 kHz. The 160th input sample will enter on the 160th input clock cycle and the 147th output sample will exit at that time. The 2nd input sample will enter on the 2nd clock edge of the input clock which will be 22.6757 μ sec after the first input sample. We expect the second output sample to appear 20.8333 μ sec after the 1st input sample, corresponding to the expected 48 kHz clock period. However, we have not indicated where the 48 kHz clock information comes from. The 44.1 kHz input clock is assumed to come with the 44.1 kHz input data.

We would appear to have two choices for the 48 kHz output clock. On one hand we can assume that the re-sampler electronics could also create such a clock to appear with the output data; on the other hand we can assume that there is some master system clock at 48 kHz located in the studio. Each of these assumptions has its problems.

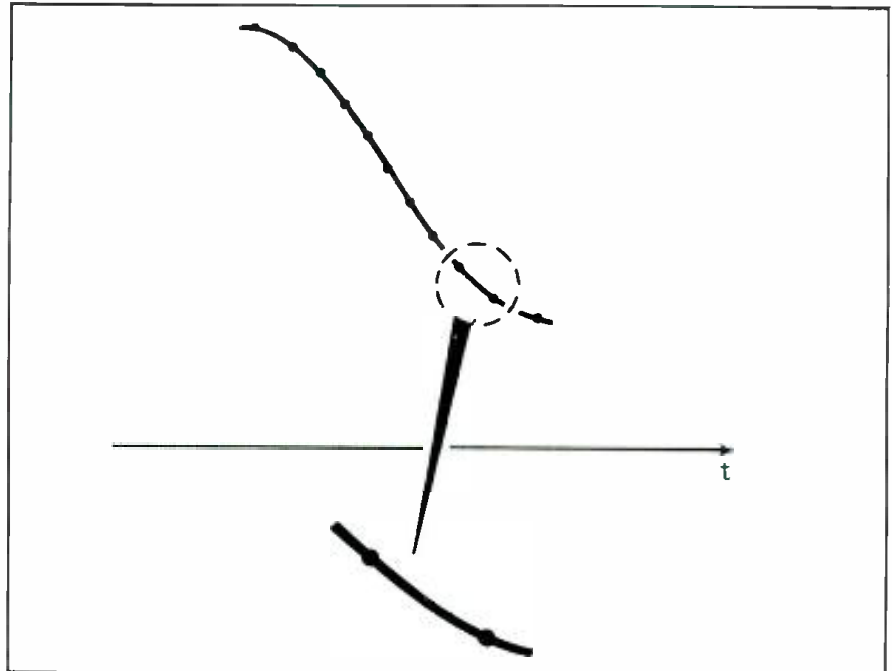


Figure 1. Segment (top) of 20 kHz audio after re-sampling at a very high internal sampling rate. Two samples (below) of the signal showing that linear interpolation is very accurate because of the low value of the higher order derivatives.

CLOCK GENERATION

We take the case of clock generation first. Who can create a 48 kHz clock out of a 44.1 kHz input clock? In a real sense this is the frequency synthesis issue, and we can refer to the techniques used for this kind of process. One such approach is to build a series of frequency multipliers that will convert the 44.1 input clock to a 7.056 MHz. Since the factor is 160, we could build a set of multipliers using factors of 4, 4, 5, and 2. A frequency multiplier is nothing more than an impulse generator running at the input frequency followed by a filter that filters for the n th harmonic. For example, if the input clock triggers a 50 nsec monostable, we will have a periodic impulse train at 44.1 kHz. A filter placed at 220.5 kHz will filter the 5th harmonic. After suitable filtering, the result will be a sinewave which can then be used to feed the next frequency multiplier. In the end we will have created the 7.056 MHz sinewave which

can then be divided digitally by a factor of 147.

Although not a trivial activity, we can see a mechanism for doing the task. The problem gets more difficult as the ratios become more irrational. Another technique for creating the clock generation is that of using a phase locked loop. This is an advanced signal processing idea which is beyond the scope of this article and may be discussed in the future. Regardless of which method is used, we should note that the allowed phase jitter on the clock must be very small if we are to preserve the required audio signal quality. Jitter on the order of 1 nsec will degrade high frequency audio energy way beyond the 98 dB of a pure 16 bit system. The technical difficulties with the jitter problem often rule out the use of simple clock synthesizers. In fact, phase jitter is a major intellectual problem in all frequency synthesizers. There is extensive literature which shows that the task is very difficult and requires a very high level

of sophistication. The average audio hacker would not want the problem.

Now that we have gotten to the point where we understand that such a converter could be built, we are left with an interesting system issue. The clock regeneration now becomes the master for all activities which relate to the output data. Assume that there was other equipment in the studio running from the studio master clock system. Its frequency is also specified at 48 kHz. The 48 kHz clock regeneration must be exactly the same as the studio 48 kHz. The two can only be made exactly the same if there is a wire between them: i.e. one is master, the other slave.

If they were independent, we would not expect them to be exactly the same. Suppose one was 48.0001 kHz and the other was 48.0000 kHz. That means that there would be 48,001 samples of one clock for every 48,000 samples of the other. We can no longer connect the audio data across this boundary because we will need to repeat one sample twice or to ignore one sample every 10 seconds. This is not a large degradation but it is one which we would like not to build into the basic structure of converting between sampling frequencies. The slippage between the systems is not ideal.

We are now stuck in an unsolvable problem. On one hand we wish to use the ultra-high quality studio clock reference because it is designed for low jitter. On the other hand, we need to make the output clock of the re-sample be an exact integer ratio to the input frequency and an exact match to the studio clock.

One of the papers at the Rye Digital convention presented by Roger Lagadec proposed a very novel approach to this problem by allowing the re-sampler to have two clocks: an input clock and an output clock. At first look this appears to be relatively simple. With a second look, we see that this is not so simple because the re-sampling is no longer done at a predetermined rate. If the system can respond to small changes in one of the clocks (desired characteristic), it could also respond to larger changes. In other words, the system provides an output sample on demand.

The exact details of this approach have not been presented publicly because of patent issues. Until such time as the patents are issued or rejected, we will not have the full story. The paper does provide some clues, however. The key revolves around the original idea of linear interpolation between samples, as discussed two months ago in this column. We rejected it at that time because linear interpolation is not very accurate except for low frequencies. At low frequencies, the errors are very small.

Thus the key to the approach is to create an internal effective sampling

frequency which is relatively high. At this high frequency, all audio information is relatively low frequency. Compared to 5 MHz, 20 kHz is very low. FIGURE 1 shows a section of a 20 kHz audio signal sampled at a very high frequency. The blow-up below shows the part of the signal between two samples. The segment connecting the two samples is almost perfectly linear. In fact, the higher the sampling frequency, the more linear the approximation in a square sense. Doubling the ratio lowers the error by 4. We can thus tolerate the error.

The final interpolator can thus be done at very high speeds and may in fact be performed analog. This is only a guess and we will have to wait for the results.

The interesting aspect of this solution is that it allows two digital systems to be interconnected without regard to the clock frequencies, phases or jitters. The result of re-sampling will be as good as the two clocks which the user provides. The need for the re-sampler in this application only comes from the fact that the industry has not standardized on a particular single frequency. There was a strong move to create a standard from the beginning, but there were very conflicting constraints.

SAMPLING STANDARDS

The arguments for sampling frequencies were extensive. One group wished a low frequency to achieve higher channel usage. The European broadcast community wished a low rate in order to get more audio channels on their digital multiplexed carrier systems. They also wished simpler and cheaper hardware that comes from lower rates. Led by the BBC and German Post Office, a series of experiments were conducted on the required audio bandwidth in order to determine the sampling frequency. The results clearly showed that 15 kHz of bandwidth was more than adequate in any real listening situation. The results are available in technical journals and in the BBC engineering reports. With this bandwidth, they selected a sampling frequency of 32 kHz.

Another group led by the Japanese Consumer Electronics Industry wanted frequencies that were compatible with TV format. They believed that digital audio would share common hardware and perhaps use the TV format for digital bits. They also considered having digital audio with video. The result of conflicting demands led them to 44.1 kHz.

Finally, the professional audio group wanted a higher frequency and one that was compatible with other references including 50 and 60 Hz. The choices eventually reduced to 50 and 48 kHz with several other possible choices. The

48 kHz was especially interesting because of the 3:2 ratio with 32 kHz. However, once the standards issue became more clear, with the professional using 48, the broadcast group considered switching. We are thus left with a consumer standard and a professional standard.

During the last 12 months there was extreme pressure placed on the consumer group to switch to 48 kHz. In the end, they elected not to switch. The public reason given for this is that the development was too far along to switch. It is unclear if this is the real reason. We may find out that there were compelling political and economic justifications. For one thing, it makes it difficult for professional equipment to be used in the consumer environment without the special re-sampler. Perhaps this makes piracy more difficult.

Any tape recorder which can record at 44.1 kHz would, presumably, only be useful for "taking" copies of copyright digital audio discs. Even a broadcast station would require either a sampling rate converter or a special issue of the audio disc in order to process it using professional equipment. The converter proposed by Lagadec is not a simple piece of equipment, with, we presume, a price of \$5 to \$10 k. Rationalism is not always the driving force in a technical industry. One may draw the analogy to the early days of long playing records where there were more than 5 different pre-emphasis standards. A typical preamplifier had a knob to select which one to use. The analogy breaks down, however, because the cost of different pre-emphasis frequencies is reduced to a pair of R-C time constants.

With digital audio, the costs are extremely high. One may hope that a long term evolution of the audio disc could result in a convergence into a single sampling frequency standard. At this time, the only possibility comes from a little known fact. The production of digital audio discs may be limited by the choice of formats. The bit size is sufficiently close to the wavelength of light that it may be very difficult to manufacture economically. This might open the door to a second standard at a later time—with a large diameter and a large bit size. Such a second standard might come when pressure in the professional end of the business results in music in the 48 kHz format.

By the time this article reaches you the reader, the situation may be much clearer. At the time of writing, I can only speculate that even the best laid plans of engineers and businessmen do not always lead to the obvious conclusion. For those of you who remain somewhat cynical, I suggest that you adopt the slogan: "Remember Quad!" ■

Conventions and Conferences— More Than Semantics

LAST MONTH after an absence of some fifteen years, the Audio Engineering Society returned to the New York Hilton to convene its 74th convention. During this interval, the Society's East Coast conventions have been held mostly at the Waldorf-Astoria, which is now a little too small to contain the show. In fact, even the Hilton proved to be a tight fit, and at least a few last-minute exhibitors were not able to be accommodated.

While this might suggest there's a market for more and/or bigger pro' shows in the future, it seems the next U.S. gathering may actually be quite a bit smaller. At the last European convention, the Society's governors voted to return to the traditional two U.S. shows a year—one each on the West and East coasts. The decision was greeted with instant hostility by many exhibitors, who were suffering from acute convention burnout. Committees were convened, letters were launched, and the phones started ringing.

After some deliberation, the Society decided to stand by its two-show decision—almost. According to the latest word, the next U.S. gathering has been reclassified, from "convention" to "conference." Exhibit space will be limited, and the emphasis will be on the technical papers instead of the hardware.

Perhaps it's about time. According to the AES's charter, its gatherings are supposed to be "Technical Meetings and Professional Exhibits." In fact, the last "Convention" was held in Paris, in 1977. Since then, the former phrase has been used on the Society's programs distributed at the conven...oops, at the technical meetings.

This little bit of semantic subtlety was often lost on those who attended these gatherings, as they were clearly hardware shows, despite what you read in the program. Yet, as hardware shows, they were in conflict with themselves. Exhibitors would spend fortunes to drag in the latest toys, sprinkle their booths with personnel, and then promise not to sell anything.

Booths and budgets got bigger, and the tail began wagging the dog, as the technical papers were all but ignored by legions of tire kickers who came to admire, but not to buy, the hardware. Something had to give, and as often as not it would be the temper of an exhibitor, caught in the middle of audio's own Catch-22; stay away and be noted by your absence, or attend in full regalia and give your accountant an ulcer.

There's no easy answer to this dilemma, as noted by the on-again/off-again convention scheduling of the last year or so. Presumably, the Society itself has no preconceived notions on all this, and is simply trying to respond to the wishes of its members—once it can get a clear reading on what's really desired.

Of course, asking the membership what it wants is a risky business, since the Society is made up of individuals, and not of companies. Most of these individuals enjoy seeing the exhibits, except perhaps for the comparative handful who gets stuck minding the booths. If it came to a vote, the members who are directly responsible for their company's financial health are heavily outnumbered by those who are simply attendees at a convention.

So maybe it is up to the Society itself to set the policy after all. (Well of course it is, but we mean doing so without a clear mandate from the membership.) And maybe the concept of one "convention" and one "conference" is the ideal solution. At the convention, exhibitors can try to outdo themselves with bigger and better displays. At the conference, the authors can do the same with their technical papers.

Who will win this kind of contest? Perhaps it will be us members. Wouldn't that be nice?

AND ON A PERSONAL NOTE...

Traditionally, Editorials and royal decrees are written in the form known to English majors as first-person plural. This conveys the impression (to third-graders, at least) that more than one person is out there pontificating. We (you see?) don't know how this helps the various monarchs out there—the only monarch we (there it is again) ever met was a butterfly, and it didn't have a thing to say.

As for editors, "we" is kind of nice (are kind of nice?), since it lets them off the hook later on. "We" can always claim that "they" wrote those offending words while "we" were off doing something terribly important elsewhere. (If only we had known.... etc.)

Well, it's time for we—I mean, me—to shift back into first-person singular for a sentence or two. Effective with next month's db, Publisher Larry Zide resumes his dual role as Editor/Publisher. He's been vacationing long enough as Publisher only, and it's time for him to go back to work. I'll be sticking around to help with some of the technical chores, but will be able to devote a little more time to some outside interests, like sleeping, and trying to make a fortune without working for it.

It's been a constant challenge trying to keep up with a field which we—sorry, I—had been told was relatively slow-moving. If pro' audio is slow, I'm glad I don't drive in the fast lane. And for the next little while, I think I'll pull off to the side, and re-read some of that stuff I passed over the last few years. If I find any errors, it was probably "their" fault. JMW



Wurlitzer's Model 1015 of 1946. Note theatre curtains—
for five cents you got a song and a show. (Photo by
John R. Davis; courtesy Judith's Jukes, San Francisco, CA.)



Rock-ola's Magic Glo-Model 1422 of 1946 is a good
example of the wooden cabinet that produced a resonant
tone. (Photo by John R. Davis; courtesy of Judith's Jukes.)



Wurlitzer's famous Peacock Model 850 of 1940 was the
first to use a polarizer to break up the liquid in the
bubble tubes into two colors. One of Paul Fuller's most
eagerly sought designs. 10,000 were made but only
1000 or so are left. (Photo by John R. Davis; courtesy of
Judith's Jukes.)



Wurlitzer's Model 950. This is one of Paul Fuller's rarest
models. Due to a shortage of materials, only 3,400
were shipped in 1942. Today it is one of the most difficult
to find. (Photo by John R. Davis.)

The Music Goes Round and Round

Interest in the venerable jukeboxes of yesteryear is making a comeback. What next, a top 40 hit for Patti Page?

A 1934 ADVERTISEMENT from the Wurlitzer Company shows a workman wielding an ax. All around him lay the smashed remains of older model jukeboxes. In those days it was common practice to break up old boxes to force the sale of new ones; a new jukebox back then sold for about \$239. Today it costs upwards of \$6,000 to restore the survivors of not only the ax but of dust, dampness and neglect as well.

THE COMEBACK TRAIL

Jukeboxes are staging a comeback, and old ones, no matter what condition they're in, are eagerly sought by collectors and investors. Yesterday's cast-offs are today's treasures, and curiously these relics of another time are prized today more as art objects than for their original use when they were "America's favorite nickel's-worth of fun." Besides, as an investment requiring many nickels, the juke's illuminated bubble tubes, with its softly swirling red, blue and green glows is a lot more fun to look at than coveted gold Krugger-rands hiding in the family vault.

For those lucky enough to find some of the old 78 rpm records to play on their restored boxes, Patti Page's "Tennessee Waltz," the Andrew Sisters singing "Don't Sit Under The Apple Tree," Elvis Presley or Der Bingle himself might float out over a wall speaker bearing Wurlitzer's famed horned and hatted *Johnny-One-Note* logo of 1946.

During the heyday of the jukeboxes (from the mid 1930s to 1948) Americans went wild pumping nickels into these music machines. This meant profits for both the phonograph and the record industries. But why this mania with a coin?

FROM IDOLS TO EDISON

The concept of exchanging a coin for goods and services has been around for a long time. Consider the ancient Eastern temple where the eyes of the idol could be made to drip tears when the worshipper placed an offering on some portion of the idol. The weight of the offering triggered a valve connected to a vessel deep beneath the temple. This vessel was filled with hot water. When the valve was tripped, steam was forced up through the bamboo tubes leading to the idol's eyes. What power! One could make the deity cry and even control the amount of tears by the simple act of controlling the amount of the offering.

The same psychology exists in any coin-operated amusement machine—that is, a feeling of control; a one-to-one relationship between the patron and the source. And as a source of entertainment, the jukebox was tops. By 1937, 225,000 of them could be found in restaurants, pool halls, candy stores, coffee shops and diners across the nation. By the mid 1950s there was one machine for every 330 Americans.

Carole B. Davis is a freelance writer working out of Mountain View, CA.

It's rather humbling to realize that the whole thing began in 1877 when a stunned and astounded Tom Edison rotated the crank, reset the stylus on his crude machine and heard his own voice repeat, "Mary had a little lamb"—the very words he had just recorded on a piece of tin foil.


A few years later a wax coated cylinder replaced Edison's tin foil. The two scientists who did this merely turned the name of Edison's invention around and offered the public the gramophone. As is often the case, competition stirred up action. "Why can't people leave my talking machine alone?", fumed Edison, who was forced to make improvements on his machine, the phonograph.

SOME EARLY ATTEMPTS

In 1886 the nation's innkeepers latched on to a good thing. They discovered the penny-in-the-slot mechanism worked



PRECISION



**MAGNETIC
TEST TAPES**


STANDARD TAPE LABORATORY, INC.
26120 EDEN LANDING ROAD #5 HAYWARD CALIFORNIA 94545 • (415) 786 3546

wonders as a way of recouping their outlay for the disc music boxes popular in their establishments.

Four years and an additional four cents later, nickel-in-the-slot phonographs began appearing around the country. The invention, despite Edison's desire to keep it for commercial use, was a natural for the burgeoning entertainment industry that heralded the start of that fabulous decade known as The Gay Nineties. The first-ever coin-operated phonograph was installed at the Palais Royal in San Francisco in November of 1889. It had four listening tubes and a coin slot for each tube.

Now the demand for records began in earnest and in 1890 the Columbia Record Company became the first recording specialists. The next year, the infant company signed up John Philip Sousa's Marine Band, the public's favorite.

By the end of the century Phonograph Parlors were everywhere. The customer had only to select from a choice of 1500 cylinders, seat himself comfortably at the desk, request his selection by speaking into the tube, deposit his coin and thus

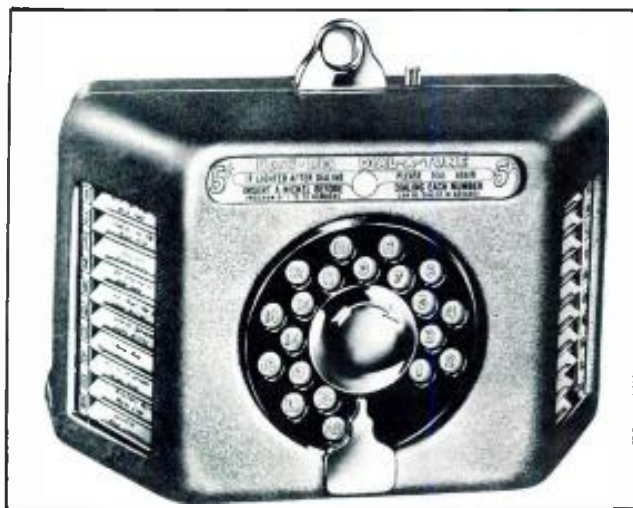

The Rock-Ola Dial-a-Tune wallbox (1941).

be entertained. Selection, the jukebox's most unique characteristic, had entered the scene.

The first true jukebox in a technical sense lasted two years. The *Automatic Entertainer* of 1906 was a multi-selecting phonograph that played discs and had a forty inch horn on top in an heroic attempt to amplify the sound. The customer, after offering the Entertainer a nickel, had to work hard winding the crank and then still even harder to listen to each scratchy note in his selection. The big horn didn't help much because the tavern noises competed with the tinny and muffled recording. The newly introduced twelve-inch records with a four minute playing time didn't help either. In short, the phonograph industry was going down the tubes because the quality of recorded sound was so poor.

Meanwhile, the public's tin ear was soothed by the considerably less tinny music boxes. People preferred the loud, sharp, clearer sounds, and fickle nickels were now offered to this type of coin-operated entertainment in the late 1890s.

Electric and player pianos were all the rage at the dawn of the 20th century. The *Peerless Piano* of 1908 all but deep-sixed the automatic phonograph. If that didn't do the job, Wurlitzer's mighty *Pianorchestra* or Seeburg's massive 1800 pound oak and mahogany *Orchestrion* posed a booming threat. The *Orchestrion*, a jukebox ancestor, continued in popularity until 1927 when far-sighted, Swedish born Justus P. Seeburg discontinued manufacture of his huge mechanical band. He knew very well electric amplification would shortly redeem the phonograph and so began tooling up for the all-electric, multi-selection, coin-operated, disc-playing phonograph he suspected would not be long in making its appearance.

Seeburg, with his mammoth *Orchestrion*, may have been the innovator for another jukebox distinction—illuminated and visible moving parts.

"The entire front of the piano (i.e., the *Orchestrion*) had been stripped off and I could see its working parts," said an awed chronicler. "Fascinated, I watched the technician go about his task. He put the facade of stained glass in place, put a clear glass over the percussion section...and lastly pulled a switch that made the variable lights flash on and off. Now there was sound *and* light." The world was a little closer to having its jukebox.

But in the first decade of the new century no one had much interest in a coin-operated phonograph. People were buying their own instead. For sheer fun and novelty they put coins in the ever present player piano or the *Orchestrion*, but when they got home they played songs and melodies they chose on their own phonographs. It was the best of both musical worlds from the public's point of view.

The battle for the coin-op versus the home machine served to drive the quality up and the price down. During this time an Edison *Gem* machine could be had for \$7.50, a price well within reach of the mass market even though these home phonographs still lacked decent *sound* quality.

In the true spirit of competition. The Victor Talking Machine Company had introduced the gramophone with its flat disc in 1901. It was up against formidable odds in the firmly established cylinder-playing graphophone but the new company caught on quickly for two reasons—the gramophone produced a louder sound, and the disc record could be stamped out in unlimited batches. At this point, the jukebox-to-be had another of its components, the disc record.

Prior to the start of World War I a dance craze broke out all over America, reflecting the new liberalism in the country. Tangos and Turkey Trots whirled off the record presses and must have been a welcome relief to what one chronicler called the "potted palm" music of the day.

In May of 1917 Victor made mention of a new record, giving a brief billing to "the very latest thing in the development of music." The record was a blues and one-step recorded by a group of white musicians who called themselves The Original Dixieland Jazz Band. They'd learned their music, they said, from black musicians in New Orleans.

"Does jazz put the sin in syncopation?" huffed the National Music Chairman of the General Federation Of Women's Clubs, who also made reference to the "moaning saxophones with their purely sensual appeal."

The 18th Amendment, proposed in the somber atmosphere of wartime, was as close as the purists could come in their efforts to stamp the sin out of syncopation. But Speakeasys and Jazz were the trademarks of the 1920s, and both flourished.

Finally, in 1919, serious research began into the science of acoustics and by 1924 the frequency range had been extended by two and a half octaves. Bass and treble tones never before heard in recorded music added depth and fullness to the sound. Best of all, though, the volume could be turned up without getting any loud hissing or distortion.

By 1924, radio, with its superior sound, had captured the public's fancy. And worst of all for the phonograph industry, this idol could be worshipped free of charge. Use of "that word" (i.e., radio) was forbidden at the Victor Company. At first, the phonograph and record industries considered radio just a cheap gimmick. After all, radio couldn't offer the listener freedom of choice as the phonograph could. But even with electrical recording and amplification in 1925, Victor's profits sank while RCA's rose.

And then everything crashed. It was 1929.

CRASH

The radio and the gramophone merged when RCA bought out Victor and reappeared as RCA Victor. The newly formed corporation had to scrap its plans to revolutionize the industry with its 33 $\frac{1}{3}$ rpm long-playing record. Phonograph sales slumped by 96 percent and the once-proud symbols of pros-

perity, Victor's albums of Red Seal records and the \$200 Victrolas on which they'd been played, were relegated to the attic.

Times were hard everywhere—especially in the South, where black musicians sought solace in their particular brand of music, jazz and blues.

The recipients of this solace gathered at juke joints that were little more than ramshackle cafes and shanty bars on the seedy outskirts of town. Here was a place where people could dance to the music of the juke band or the gin mill piano.

Others packed themselves into a friend's house for a lively Saturday night of drinking and dancing. These events were the popular Rent Parties, where moonshine, at 25¢ a half pint, helped pay the friend's rent. The only requirement for this evening of fun was a piano in the front room.

When electronic amplified phonographs came along in the mid 1920s, black musicians began recording with artists like the legendary Billie Holiday and Louis Armstrong. Folks in the juke joints now danced to the music of juke *bores* instead of juke *bands*.

The word juke (or jook) may have had its origin in an African word meaning "misconduct" or "disorderliness". As the word filtered up to northern cities, it came with a slightly wicked reputation (perhaps accounting for the misconduct). In addition, juke was inseparable from the discordant and undisciplined jazz music it represented (which might explain disorderliness).

Ultimately the word *juke* became synonymous with sex, dance and music outside the bounds of convention that the broadcasting industry refused to recognize in the 1930s, lest they be accused of desecrating the airwaves.

Someone who did recognize the potential for the jukebox industry was Homer E. Capehart, better known to some as a three term Senator from Indiana. He was a driving force in the new industry and in 1927 had the foresight to see the future of a Cleveland inventor's device, an automatic record changer. Now the jukebox was complete.

THE JUKEBOX TAKES OFF...

With the repeal of Prohibition in 1933, the 25,000 jukeboxes then in existence were on their way to amassing a fortune for the companies in the business, a business built on the nickels and dimes of Depression America. The jukebox was a cheap form of entertainment within the reach of most.

These early boxes looked like outsized radios and played a watered-down version of jazz recorded by artists like the Dorsey Brothers and Benny Goodman. Bing Crosby led all the vocalists in popular music. His Decca records sold for 35¢ apiece. It took 30 million records to stock jukeboxes in 1930. As a medium of entertainment it had hit the top of the charts, and the Seeburg Company topped the list in 1938 with their *Symphonola Classic* model. This was the first light-up jukebox and it caused a sensation.

And then everything came to a halt—again. This time it was World War II.

...BUT LANDS QUICKLY

Jukeboxes were not exactly a high priority item in the wartime scheme of things, and in order to stay solvent, the big companies in the music business—Wurlitzer, Seeburg, Mills, Rock-ola and AMI (Automatic Musical Instrument Company)—turned their attention to manufacturing war equipment instead. Between 1942 and 1946 no new phonographs were made.

The war effort drew people together in a common cause. Inhibitions relaxed and suddenly it was OK to dance with a total stranger but, alas, as the demand for jukebox music increased, the supply did not. Old machines were pulled out of storage (provided they'd escaped the workman's ax) and operators could name any price.

Worse yet, in 1942 the government prohibited the use of shellac in records. Adding to the industry's woes, in August of that year, James C. Petrillo, president of the American Federation of Musicians, set out to force the record companies



Rock-Ola's Super Luxury Light-Up (1940).

Rock-Ola's Spectravox (1941).

to share their profits with the musicians. For the next two years there were no new recordings. But then, there were no new jukeboxes to play them on either.

KEEPING THE LIGHT BURNING

During this fallow time one man emerged as the design leader of the industry. And design he did, even though the war years spanned the time between design and production. In 1940 alone Paul Fuller created eleven new jukebox designs for Wurlitzer, including the best known and best loved Model 1015, recognized by jukebox aficionados the world over. 56,000 of these machines were made in 1946.

Today, a restored 1015 displays one unbroken arc of light circling around the front of the machine. Bubbles rise from the base and converge at the arch while two multi-colored fluorescent tubes slowly revolve within the two columns, bathing not only the jukebox but everything around it as well in soft pools of ever-changing reds, blues and greens.

For pure art, it's hard to beat Paul Fuller's romantic and colorful *Victory* model of 1943. Perhaps still anticipating the production of phonographs, Wurlitzer publicity for 1943 shows a group of service men and women (plus a few civilians) gazing in rapture at Fuller's only jukebox design for that year. The brilliantly colored stained glass panels on this *Victory* model dominate the entire machine.

Fuller's very rare (only 3,400 made) Model 950 of 1942 features the more familiar illuminated bubble tubes on the sides in combination with the designer's distinctive scroll work and artistic panels on the front.

During Fuller's whirlwind year of 1940, the former furniture designer produced a jukebox easily recognized today. The stained glass panel on the front has two regal peacocks sitting on a branch with their majestic tails swirling down in graceful curves. The sky blue background accents this elegant Peacock Model 850.

The days of elegance ended in 1948 when television, the fast food industry (no time for romantic lingering by the juke), LP vinyl 45 and 33 $\frac{1}{3}$ records, and a post-war America all contributed to the more sophisticated and streamlined jukebox of today.

For those who now comb the country looking for these discarded and noble relics of an easier era, the jukebox represents not only an investment for today but an investment in yesterday as well. Consider it also as an investment in time, such as those days in 1936 when "The Music Goes Round and Round" sold a whopping 100,000 copies. ■

A Journey Through Time

Billed as a son et lumiere (sound and light) show, Timespell is a major box office success. Using cliff walls as a stage, audiences watch as high-powered laser beams, panoramic sound, and special effects tell the story of the Watkins Glen Gorge in upstate New York.



WATKINS GLEN GORGE. New York, has a charm all its own, but as with many rural areas, it needed a redevelopment project to increase its economic outlook. In 1979, White Water Development Company was formed to work on this and other projects. Edward C. Dalrymple, president of the company, contacted Chad Floyd. Floyd, a principle in the architectural firm, Moore Grover Harper, Essex, Connecticut, planned the sound and light show to be a primary new attraction, a revitalization of the tourist industry, thereby generating revenues for future development.

Timespell was the first show to combine private sector involvement in a government park for an educational show. Investors and a State agency began a partnership to bring a dramatic portrayal of history to the Finger Lake Region of New York State.

The plans for Timespell rested until 1982, when the Dalrymple family approached several producers. White Oak Design, Inc., of Marblehead, Massachusetts, was chosen as the most experienced, and having the credentials to produce the show as planned.

THE CONCEPT PHASE

While creating an outdoor, state-of-the-art presentation, White Oak had to keep in mind the environmental impact on the Gorge. "The entire design was planned around the environmental concern," said Jacobsen. "The Gorge is the principle character. Part of the tradition of theatre is to let the audience see the glory and splendor, not the tricks behind the magic. We planted trees and used the natural habitat to keep the Gorge as before."

During the concept phase of Timespell, White Oak Design conducted sound pressure level tests in the Gorge. This was necessary to gauge the amount of sound which managed to escape the immediate concert area. Using a sound pressure level meter, an octave real-time analyzer and a high quality Nagra tape recorder, a series of tests were taken from various locations (see FIGURE 2).

The audio testing was achieved with the use of two full-range speaker cabinets with a relatively constant output of 100 dB sound pressure level three feet in front of each speaker. All tests were run with ambient noise (rushing waterfalls), then the addition into the environment of a sample audio mix of narration, music and sound effects

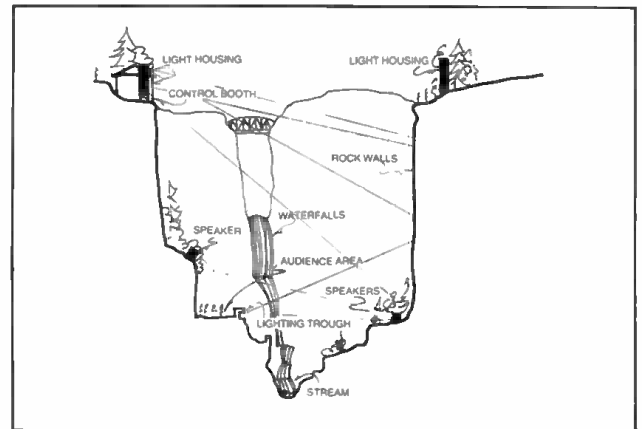


Figure 1. Section through Watkins Glen Gorge showing Timespell.

(loudest show tape), and an additional test of symphonic music at key locations (orchestral music). These test "shows" were run at peak levels so that they were easily heard over the rushing waters in the Gorge. The season that the park is open would find a gentler cascade of water and fuller vegetation, both of which would reduce the amount of audio noise escaping the area.

Tests were also necessary to convince the New York State Department of Parks and Recreation that the neighboring houses and businesses wouldn't be imposed upon.

THE DESIGN PHASE

During the design phase of Timespell, White Oak relied on their usual team: John Jacobsen served as artistic director; Tim Curnen of Hollywood, California, was the script writer, and Steve Rich and Berred Ouellette combined their audio knowledge as the audio producers.

"I worked as chief engineer in a recording studio for seven years. In that time I learned that every engineer or designer has their own personal taste and style," said Ouellette. "There was the typical arm-wrestling between the script and the designers, but that's expected among professionals."

Music Designers of Hudson, Massachusetts, was chosen for the mastering of the audio tapes for Timespell in part because of the flexibility they were willing to give the producers. The musicians' microphones, cable setups and

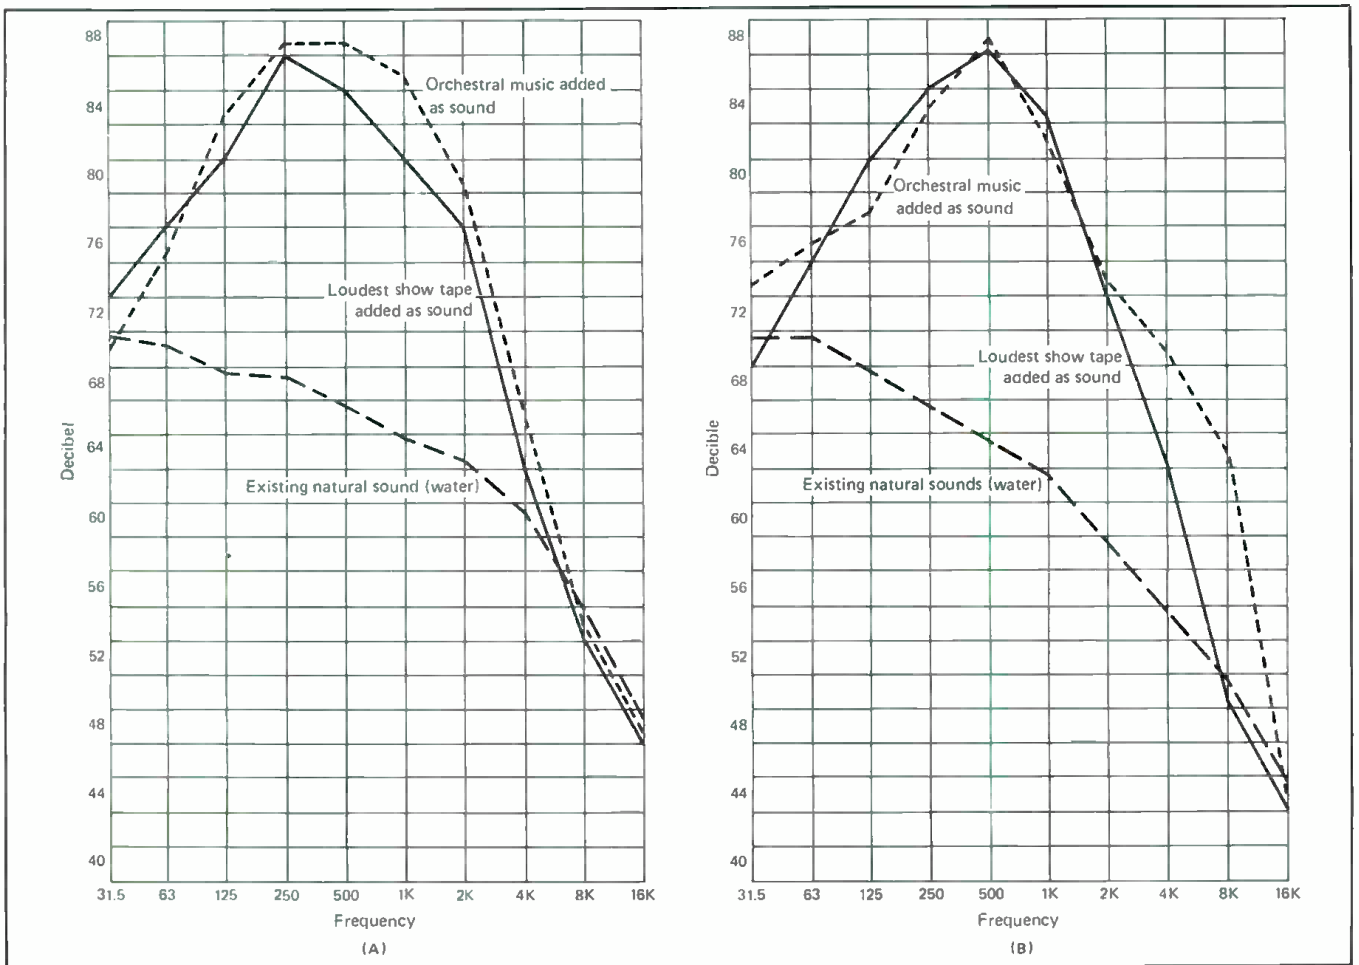


Figure 2. Sound pressure level tests conducted by White Oak for audience level right (A), and audience level left (B).

equipment were all kept in the same position to allow the ability to come in and get right to work.

One of the other features of Music Designers was their large control room (see FIGURE 3). This allowed the setup of seven speakers around the room. "We had to be sure that we were getting the delay in sound that we required in the script. We had enough room around the control room so that we could set up the speakers and get the pan effect that we wanted," said Ouellette.

The audio equipment used during the mastering of the tapes was an Allison 64K automated computer, a Harrison 32x32 console, a 3M 24-track, several 8-tracks, and dbx Noise Reduction. There were five synthesizers used during the audio production: Sequential Circuits Prophet 5; Oberheim OBX-A; Yamaha CE20; Odyssey, and Arp String Ensemble.

A major stumbling block in the mixing of the tapes was in obtaining the delay between the speaker locations that was required. "We wanted to acoustically move the wall behind the audience area. This would give the audience a feeling of spaciousness," said Ouellette. In order to get the right delay time and be sure that every person could hear the narration and effects correctly, the audio portion of Timespell was mixed several times. "We would mix the show, go to Watkins Glen, play it and listen to it from several key positions, find it wasn't quite what we wanted, go back and remix and do it all over again," continued Ouellette. "We did this three times! It came down to a 600 millisecond delay between the speakers behind the audience area."

The lighting designs were created by Rick Chamberlain. Mason Daring, producer, performer and recording artist, was the music director for the complex musical scores for Timespell.

A laser beam with a musical signature is used at three points during the show to underscore the power of nature. Each beam is reflected off mirrors mounted in the stone wall, crossing and floating in the air. The laser system was provided by Image Engineering, Inc., of Somerville, Massachusetts (see accompanying sidebar).

Professional Recording & Sound (PRS) of Boston, Mass., was chosen to provide the audio system, interface it with the show's computer and install the components.

Peter Engel, President of PRS, was directly involved with selection and purchasing of the audio hardware, while Steve Blake was assigned the task of the design and final installation of the project. The PRS Audio Service Engineers involved were David Butler and Bob Patton.

"We first visited the site in mid-January. There were huge icicles hanging from the cliffs, and large pieces of fallen rock everywhere," said Blake. "When Berred Ouellette from White Oak started down into the bottom of the Gorge on a rope, I knew that this wasn't going to be a typical installation."

SYSTEM DESIGN AND EQUIPMENT

"White Oak's selection of audio hardware was basically excellent, although some minor changes were necessary," said Engel. The Otari MX5050-8D White Oak requested was replaced with the updated Otari MX 5050 MK III-8. "We've used Otari products on our previous shows, and have always been impressed with them," said Ouellette. The Otari supplied seven channels of audio and one control track that provided timing information to the computer. There is one back-up Otari on site, which can be used by simply throwing a single multicontact switch.

The system design called for octave band equalization for



Figure 3. Music Designers' studio, featuring seven speakers for audio playback.

each speaker location. This was necessary due to the varying acoustics with changing crowds, seasons and weather conditions. For this purpose, four Klark-Teknik DN22 series octave band equalizers were chosen. Other major pieces of equipment used for Timespell included four dbx 150 Noise Reduction units and four QSC 1400 amplifiers (see FIGURE 4). For the walk-in music for the show, the Sony auto-reverse cassette deck with Dolby C™ was chosen. In trying to keep the cost of the entire show down, it was decided that a cassette deck would be acceptable for the "mood music" at the beginning. Except for the dbx and Klark-Teknik units (which have spare channels), there are spare units for the other pieces of equipment on the site.

The Audio Service Department at PRS custom built a dual shelf-rack to accommodate the Otari and associated equipment.

THE SPEAKERS

The system specifications for the speakers called for them to be wide bandwidth, high efficiency, relatively compact in size, and weatherproof; it also called for "animal and insect proof, and the ability to withstand large pieces of falling rocks."

"Working with Kenton Forsythe of Eastern Acoustic Works, Inc. of Framingham, Massachusetts, the FR-350R speaker was chosen. This is a high-powered compact three-way speaker system built of baltic birch with a horn-loaded 15-in. speaker, a 1-in. compression driver, two tweeters and a heavy duty passive crossover.

The eight stock speakers were covered with fiberglass and fitted with protective covers. The crossovers were sealed in boxes. The front of each speaker was covered with a very fine stainless steel mesh, and the entire speaker was painted a neutral grey to blend with the rocky environment.

"The speakers were a good choice," said Ouellette. "Knowing their capability allowed us to achieve the effect we wanted. We wrote into the script exactly where the music came from, planning that the audience would experience a different sound depending upon where they were standing."

The sound system was built and tested in the Audio Service Department at PRS, then dismantled and driven to Watkins Glen early in April 1983. Blake and Patton of PRS engineered the installation.

THE INSTALLATION

During the winter months prior to the installation, the construction crew was occupied with building the main control booth. The original plan for the location of the booth was a distance away from the Gorge with the projector being the only equipment in the control booth. However, after designing the booth for just the projector, and then realizing the necessity for heat sync space and additional space for the air conditioner, the control booth grew big enough to house all of the equipment; the dimmers, lasers, projectors, computers, and the audio system.

The electricians from Kirton Electric Co., New York, had run over seven miles of wiring for the speakers and lighting instruments. The longest unbroken stretch of speaker wire is approximately 350 to 400 feet. By using a 10 gauge wire



Figure 4. A portion of the audio rack designed by PRS Service Department.



Figure 5. During the precarious installation, 160 lb. speakers were hoisted and positioned within the 110-foot cliffs of the Gorge.

and careful computation, the total loss of volume was .5 dB on the longest stretch. The wires were covered with neopline without which the wiring would have deteriorated within six to eight months.

When the equipment arrived on the morning of April 12th, the Gorge was ready for the installation. The first day was spent with the construction crew lowering speakers into the Gorge from 110 foot cliffs (see FIGURE 5). The speakers on the show wall, facing the audience, were hauled across the Gorge. The other speakers were lowered from the top of the cliffs, using a tripod extension on a crane. The speakers were mounted on concrete palates that were positioned in January. By noon on the following day, the racks were in the control booth and the system was wired.

"That afternoon we played the audio show for the first time. There were seven channels of audio spread far apart around the Gorge, the sound and sense of motion between the speaker location was fantastic," said Blake.

At one point, while a speaker was being lowered into position, it started spinning and couldn't be controlled. The screen covering the speaker was torn, but was easily replaced.

THE FINAL PRODUCT

The format for the show begins with the meeting and gathering of the audience. In the pavillion/bandstand area

there is wine and cheese available, musical entertainment, and a chance to get acquainted with Timespell through literature, brochures, and their museum. As dusk falls, the show's operator depresses the Audience Walk In button; this brings up the lights and starts the cassette deck. While the background music plays, the audience is walked through

DONNA LEWIS CURTIS

Lasers Light Up Gorge

Image Engineering Corporation, a laser graphics and display company from Somerville, Massachusetts, was commissioned by John Jacobsen of White Oak to design and install a laser projector system technically compatible with all other components of the audio visual system for Timespell.

The laser system, designed by Eric Eisack, was required to project 90-foot-wide graphics onto the gorge wall 120 feet from the projector, and generate atmospheric effects as well.

THE SYSTEM ASSEMBLY

A custom designed and constructed projection system integrating an argon laser capable of producing blue green light was used to create atmospheric beams as well as unusually large representational graphics. The system consists of three major parts: the laser and its electronics; a custom designed optical bench and optical components, and the custom designed image and optical drive electronics.

The laser, a Lexel model 95-4 argon, was modified by Image Engineering to produce as much as 7.5 watts of laser light. The unit requires 208v 3-phase power at 35 amps and water cooling at a rate of approximately two gallons per minute at 20 psi.

The optical bench and components were custom designed by Image Engineering as well. For this application, the laser is integrated into a system of precision optical components allowing for two modes of operation. In beam mode, mechanical actuators can be used to project individual beams onto mirrors to create matrices of light in the gorge. Accumulated beam lengths of approximately 350 feet after two reflections required angular accuracies of approximately $\pm .75$ milli radian! The second mode, scanning, allows for the projection of imagery onto the opposing cliff face.

The image and optical drive electronics were also custom designed for compatibility with the optical components and the signals from the unique control computer. The drive electronics designed by G. B. Engineering allow the control computer to manipulate any element of the Image Engineering system—turning the laser on or off, increasing or decreasing power for a fading effect, selecting the preprogrammed image, or activating the atmospheric beams. The 16 pre-encoded images, stored in the electronics rack, are called up by the show computer one at a time.

THE INSTALLATION

The show computer and the audio and light equipment, including lasers, are housed in a permanently enclosed lighting booth to protect them from nature's elements. IEC master rigger, Bryan Hemberger, rappelled over the edge of 150 foot cliff faces into the gorge by rope and harness to permanently place seven 8- by 10-in. remote mirrors on accurate aiming devices on the rock's surface to produce the complex reflection pattern. Reflecting the beam off these mirrors produces a beam sculpture in the gorge, and the natural mist in the atmosphere enhances the beam, making it more radiant.

In addition to beam sculptures and graphics throughout the show, lasers were creatively employed to produce other special effects such as a 150 to 350-foot beam projected across from the parking lot as a dynamic opening effect, a dramatic lightning bolt, and special images introducing each act.

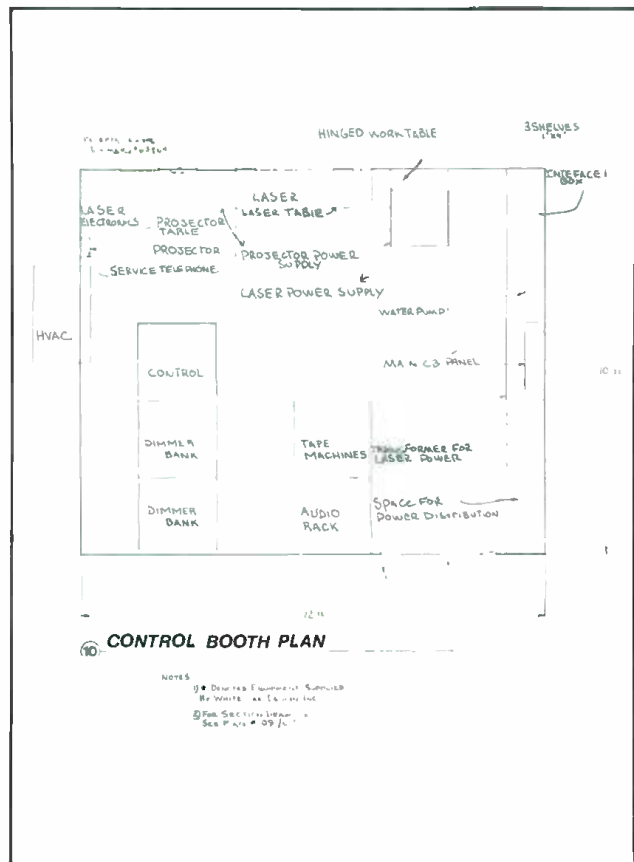


Figure 6. The control booth plan for Timespell sound-and-light show.

a natural stone tunnel, across a bridge, and into the breathtaking Gorge. When the audience is ready, the "Stand by to Announce" button is pushed, fading out the music and allowing the announcer to speak through the system. Using a push to talk microphone, the announcer prepares the audience for the beginning.

Timespell begins with a push of the Start Show button, starting the 8-track. From this point on, the laser, lighting, and audio effects become completely automatic.

At the end of the show, the 8-track rewinds to a foil strip at the beginning and plays until the computer senses time code, stops the 8-track; it's then ready for the next performance. The background music fades in and the audience leaves.

"The outdoor conditions, the rocky precipices and the tumbling waterfalls all presented audio problems of the highest order, and yet the system sounds just gorgeous!" said Jacobsen of White Oak Design. Timespell runs from early spring until the fall, when the software and hardware are removed for the winter months.

Timespell opened right on time and each of the performances has been a sell-out. The Watkins Glen area has prospered with the increased tourism, as hoped for and, of equal importance, the Watkins Glen Gorge is being treated with the respect that it has earned through the centuries. ■

db Convention Report

The 74th AES Convention

The Exhibits

NEW YORK CITY in October can be capricious; you never know whether to expect cold wind and rain and traffic gridlock (a bad experience), or an Indian summer with just the right atmospheric conditions to make the City come excitingly alive (a good experience). In their almost infinite wisdom, AES convention chairman Al Grundy, president Tom Stockham, and executive director Don Plunkett chose the perfect four and a half days (it rained the last afternoon) in October to convene the 74th Audio Engineering Society convention. The New York Hilton hosted manufacturer's exhibits, technical paper sessions, workshops, and special events from October 8th through the 12th. The first day, Saturday, was designated Digital Day and was given wholly to digital audio topics including digital recording and broadcasting, hands-on digital, a digital tutorial, and a compact disc presentation. On Sunday, the manufacturer's exhibits opened and thereafter ran concurrently with additional technical paper sessions and workshops. Exhibitors booked all available exhibit space well in advance of the convention—perhaps a positive economic indicator. Two hundred exhibitors from nine countries chose to display their wares and argue their relative merits, employing marketing strategies and incentives ranging from sales literature to hospitality suites, from T-shirts to beer bottle openers (very useful in the hospitality suites).

Perhaps the most striking aspect of the recording hardware on display was its technical sophistication. Of course, every new piece of technology impresses us with its sophistication, but the degree of sophistication on display at this convention was collectively too great to attribute to mere evolution. There appears to be a race among manufacturers to surpass each other in design expertise; perhaps it is felt that only in this way can their product effectively compete. While higher technology sometimes might produce an audibly better product, and sometimes might expedite the manufacturing of that product, we might, for example, ponder the plight of the studio owner who is caught in the middle—forced to continuously upgrade to match his peers. Is all of this sophistication really a good thing? Similarly we might question who really requires and most benefits from technological advancement—the consumer, the studio, or the manufacturers? This chiding is only very gently given; frankly, I am generally in favor of technical acceleration. And, of course, there is justice in that an unwanted or unneeded product is simply not purchased. But it cannot hurt to reflect on the philosophy of technology and consider that perhaps it has been partly forgotten that technology must serve the product, and not the other way around.

Ken Pohlmann is the assistant director of the Music Engineering program at the University of Miami and a regular db columnist.

Most of the products on display had been designed by engineers who had not forgotten their engineering philosophy; most of the hardware incorporated features and specifications that meaningfully augmented their utility. A brief and necessarily vastly incomplete look at some of the exhibits should confirm this happy outcome of the manufacturers' endeavors.

THE PRODUCTS

Studer/Revox demonstrated a wide range of products encompassing audio/video production, consumer stereo, digital audio, and computer-control and testing of analog equipment. A video sweetening suite was demonstrated, consisting of a Studer A800 MKIII 24 track recorder, an A810 2 track recorder with center track SMPTE channel, a 900 console, TLS2000 and TLS4000 SMPTE synchronizers, A68 power amplifier and 2706 monitors. The TLS4000 was a prototype synchronizer consisting of a local control unit and a black box synchronizer; the units can be ganged and placed under control of a central computer to control a



Video Sweetening in the Studer suite.

large number of audio and video recorders. The 2706 monitor is a three-way system with dome transducers and woofer; it is recommended for use in radio and television post-production suites, as well as a close reference monitor in a larger control room. Computerized control of analog tape machines was demonstrated; a Studer A810 recorder, which contains microprocessor logic and a serial port, was placed under control of a personal computer such that all operations could be accomplished through the ASCII keyboard. (Will future engineers be able to run sessions from the privacy of their own homes?) A second A810 was connected to a Sound Technology ST1510 audio test set and a Hewlett-Packard HP86B computer running diagnostic software for per-

formance testing such as frequency response, distortion, noise, azimuth, and documentation of internal parameter settings such as bias level and equalization. Will the maintenance man do his work via modem as well?

COMPUTER DEVELOPMENTS

Other computer developments were demonstrated by Eventide Clockworks. The APX252 real-time spectrum analyzer uses the Apple II and II Plus computers as controllers for 1/3 octave RTA using 31 two-pole filters from 20 Hz to 20 kHz on ISO centers. A 48 element bargraph display with variable range resolves 1/4 dB at minimum range setting, a pink noise generator can be gated under software control, and one HIRES screen can be compared to another. The Specsystm 2.0 is an optional software package for the APX252 that performs RT60 measurements and plots decay curves; the system is also capable of plotting three dimensional spectral information (frequency vs. amplitude vs. time). The Specsystm uses ROM routines in the standard APX252, and adds additional software. An executive BASIC program provides a driver to control the Specsystm. However, instructions are included to permit use of assembly language driver programs. Will the acoustician stay at home, too?



Eventide's APX252 Real Time Spectrum Analyzer.

The Ariel RTA 331 real-time spectrum analyzer brings RTA to IBM PC owners with DOS 1.0 or 2.0, 128 Kbytes, a drive, and color graphics card. Thirty-one 1/3 octave filters on ISO standards, 72 element bargraph with 1/4 dB resolution, pink noise source, and assembly language programs called by BASIC complete the PC plug-in system. Ariel even throws in the source code.

Publison Audio Professional of Paris offers other computer application audio products—the DHM 89 B2 stereo audio computer and the KB 2000 keyboard controller. The DHM is a rack mount unit which features dual digital delay with delays of up to 5000 ms, dual pitch shifting from -2 to +1 octave, dual automatic arpeggio, dual reversed sound (which is the electronic equivalent of a reversed tape effect), and dual memory latch-mode in which memorized sound can be infinitely repeated. The DHM uses 16-bit floating point A/D and 52.91 kHz sampling rate. The KB 2000 three octave piano keyboard features a control panel with three-voice chorus, reverse synchronization to match reversed tempo with the original, memory synthesizer to play any recorded sound through the keyboard, two envelope generators, dual evolving vibrato, and glissando and sustain modes. These products are representative of the renaissance in studio/performing instruments employing digital methods.

ORBAN, DOLBY, AUDIO KINETICS

Surprisingly, there were even a few un-binary products on display at the convention. Orban showed a prototype compressor/limiter, the 412A, which will be commercially


available in January. The 412A is based on the circuitry of the popular 424A, but contains only a compressor/limiter in one rack space. Attack time, release time, ratio, and threshold are front panel controlled, along with front panel output attenuator with clip LED and peak reading gain reduction meter. Also available will be a stereo unit, the 414A with stereo coupling switch.

Dolby Laboratories has unveiled the Model 362 two



Orban's 412A Compressor/Limiter.

channel noise reduction unit, a close relative of the familiar 360 series, but featuring two channels that can be used independently for either playback or recording. Two plug-in noise reduction modules (Cat. no. 22) are fitted into the one rack space module. Dolby tone, switching functions, and dual meters are provided. The Dolby 372 is a portable 2-channel A type noise reduction unit designed for remote recording or video tape recorders where noise reduction cannot be installed directly; it operates from 4 C cells or equivalent Nicad cells providing an operating life of 8-10 hours, or remote DC input. Dolby A type noise reduction is also available in 2-channel modules that plug directly into 1-inch studio VTRs in place of their original audio modules. The Dolby CN 226 replaces the audio card in the Ampex VPR-2, the CN 221B replaces the card in the Sony BVH 1000/1100, and the CN 234 replaces the AU-27 card in the Sony BVH 2000 type C video recorder.

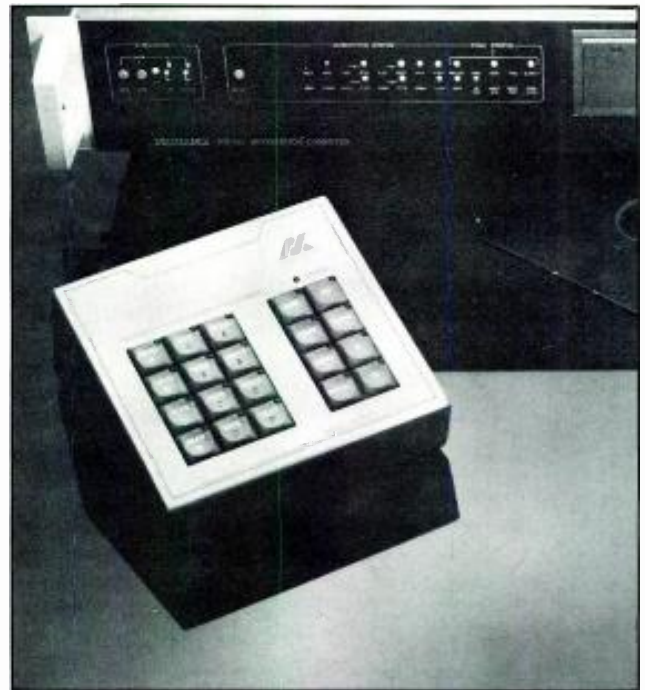


Audio Kinetics' Master Mix Automation Computer.

Audio Kinetics demonstrated their Master Mix, an independent console automation system for audio consoles using one audio track for SMPTE/EBU time code, and a 5-inch floppy disk with 600 K bytes of data storage. The

system offers independent mute and level automation accurate to one video frame. Update data is automatically merged with old data to provide a new composite mix. The system includes a bi-directional multi-standard time code generator and can be interfaced to most automation-ready consoles or retrofitted for consoles not previously prepared for automation. The use of time code also permits transport interfacing using the Audio Kinetics Q lock 3.10c synchronizer. The Q lock can provide all of the operating code standards: EBU 25 frames per second, SMPTE 30 frames per second, SMPTE drop frame, 29.97 frames per second, and film 24 frames per second. A 310-3 system provides synchronizer and audio editor, generator, and remote control for three audio or video machines with auto record, autolocate, cycle routines, and 10 user memories. Special software is available for ADR/looping, sound effects assembly, and telecine.

OTARI, SONY, MCI/SONY, dbx

In addition to their rapidly growing line of MTR-series microprocessor-controller tape recorders, Otari exhibited and released preliminary information for the EC-401 and EC-402 resolvers, designed as multi-purpose speed controllers for audio tape machines—especially as used in film and video interface applications. Using a tape machine control track of biphase, FM pilot, SMPTE/EBU, or any 40 to 80 Hz signal, and external reference of SMPTE/EBU, composite video, mains, or TTL level signal, Otari's proprietary Widelock constant phase circuit can lock the machine's control track to an external or internal time base reference. The 402 resolver is a dedicated plug-in module for the

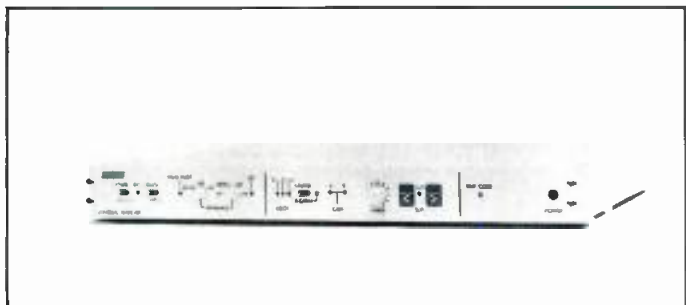

Otari's EC-401 Universal Resolver.


MTR-10/12 tape machines; the 401 universal resolver also includes time code reader/display and capstan control outputs.

Sony and MCI/Sony were present in full force at the convention. Apparently not content with the acquiring of the South Florida console company, Sony announced a new 12 channel portable mixer, the MX-P61, a rack size console with transformerless balanced input and output, monitoring



Sony's RM-3310 Remote Control System for the PCM-3324.

and talkback, three band equalizers, two stereo limiters, and phantom powering. Also demonstrated was the Sony RM-3310 remote controller for the PCM-3324 24-channel digital recorder. The new unit provides full remote control as well as synchronization of additional (up to 15) multitrack recorders, and autolocate functions. The RM-3310 consists of rack-mounted master unit and system control board. Sony also introduced the CDA-5000 Compact Disc analyzer, companion to the CDP-5000 professional disc player. The CDA-5000 can be used for quality assurance or CD masters and replicated discs, checking for sub-code dropout or irregularities, noise generated by the error rate, and mis-tracking of the laser pickup. The CDP-5000 professional console CD player is intended for broadcast studios, and features quick access capability—search to any audio signal within 13.3 ms accuracy, within an access time of

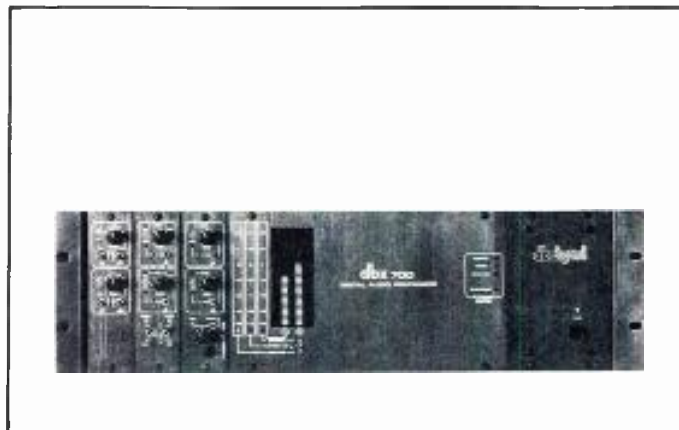

The dbx Model 700 Digital Audio Processor.

2 seconds. The MCI/Sony JH-110B-3-LB layback system for video was debuted at the convention; this is a post production recorder designed for transfer of audio to 1-inch type C video tape—to be used instead of a type C VTR. The layback recorder has two audio tracks and one SMPTE time code control track with 1-inch tape, and optimizes audio parameters for the audio portion of the edited video tape.

In addition to their line of signal processors and noise reduction units, dbx's answer to linear PCM, the Model 700 digital audio processor, was demonstrated at the convention. Their process uses companded predictive delta modulation, sampling at 700 kbit/sec to obtain a dynamic range of 110 dB, frequency response of 10 Hz to 20 kHz $\pm 1/2$ dB and THD of less than 0.01 percent at 1 kHz. The rack-mounted processor uses a conventional video cassette recorder as its storage medium. Delta modulation codes only the differences between successive samples rather than instantaneous voltage values as in PCM. However, delta modulation's dynamic range is limited. In the dbx 700, the limitation is overcome—a compander is used to optimize the signal level to the delta modulator, and a linear prediction filter is used to lower the quantization noise.

QUANTEC, TECHNICS, FENDER, MXR

The Quantec room simulator from Marshall Electronics is "more than just a reverberator." In fact, it is a digital processor that can emulate the acoustical behavior of any volume, establishing a continuum of resonances correct in their density and distribution. Specifically, room size, decay time, low frequency decay, high frequency decay, reverberation density, resonance density, reverberation, and first reflection are all computed and simulated. Thus any conceptually correct acoustical environment may be devised to best suit the musical context—whether it be a recreated acoustic environment, one created anew, or perhaps an environment not naturally acoustically possible. This device

uses a 16 bit A/D converter and 26 bit processor clocked at 20.48 MHz, with 2 Megabit of RAM.

Technics has announced the development of a 16-channel digital audio tape recorder using ¼ inch tape. High density (4.06 Megabits/square inch) recording is accomplished through the use of thin-film heads. In addition to the 16 audio channels, there are three auxiliary channels and one control channel. An isolated loop tape transport is used, and a remote control provides for auto/manual punch-in, autolocate and cycle, pitch control of plus and minus 9.9 percent, 10 point memory of tape position, and 10-group set-up memory. The tape recorder features switchable 48/44.1 kHz sampling rate with 16 bit linear quantization, and tape speed of 30 ips at 48 kHz.



Fender's 2244 Power Amplifier, delivering 440 watts per channel into 8 ohms.

Fender, long known for their expertise in the construction of musical instruments, has expanded their product line to include sound reinforcement equipment. Fender mixers now include models from the 6-channel Model 3106 with built-in power amplifier to the 16 input stereo Model 4216, all with phantom power, transformerless circuitry, and LED indicators on every input channel. Two stereo Fender power amplifiers are offered: the 2224, with 240 watts per side, and the 2244, with 440 watts per side. Both have balanced inputs, selectable high pass filter, forced air cooling, speaker disconnect relays, and LED metering for level and heat overload. Fender microphones include the M series miniature condenser capsules and remote preamplifier, and the D series of hand-held dynamic microphones.



MXR's Model 185 Drum Computer.

MXR has expanded its audio processing line to include a drum computer that features 12 digitally recorded drum sounds with individual level controls and outputs, a capacity of 100 patterns of up to 99 beats each, tempo adjustment from 40 to 250 beats-per-minute, click track, and external trigger for all voices.

NEW ENGLAND DIGITAL, AKG, PHOENIX AUDIO LABORATORY

New England Digital has announced new Synclavier II options including a digital guitar option with access to all of the Synclavier's capabilities (synthesis, printing, sample-to-disk etc.). A 16-button LED panel attaches to all Roland GR guitars to control the Synclavier's real-time features.



New England Digital's Synclavier II Real Time Keyboard, part of the Synclavier II Digital Music System.

Just when I hoped that AKG was ready to introduce a digital microphone, they shook me up with a new tube microphone named The Tube with, yes, vacuum tube circuitry. This microphone uses a large diameter condenser capsule and hand-selected 6072 tubes; a remote unit provides for nine pattern selections and three position bass roll-off; it comes in a flight case to protect those fragile pieces of glassware.



AKG's newest invention in microphones, The Tube.


Phoenix Audio Laboratory demonstrated its nifty Loftech TS-1, an audio measurement device that combines a sine wave generator, dB meter, and frequency counter in an almost palm-sized case (your hand, not the tree outside my window). Also included with the test set is a book explaining basic calibration and measurement procedures including S/N ratio, frequency response, resonance and impedance.



Phoenix Audio Lab's Loftech TS-1 Audio Measurement Device.

KLARK-TEKNIK, LEXICON, BEYER, APHEX

Klark-Teknik has introduced a new family of equalizers, building on the reputation of the DN27A equalizer. The DN360 combines two 1/3-octave channels over a full 30 ISO center frequencies from 25 Hz to 20 kHz. The DN301 is a 30-band attenuating equalizer, while the DN332 offers dual 16-channel 2/3-octave equalization.

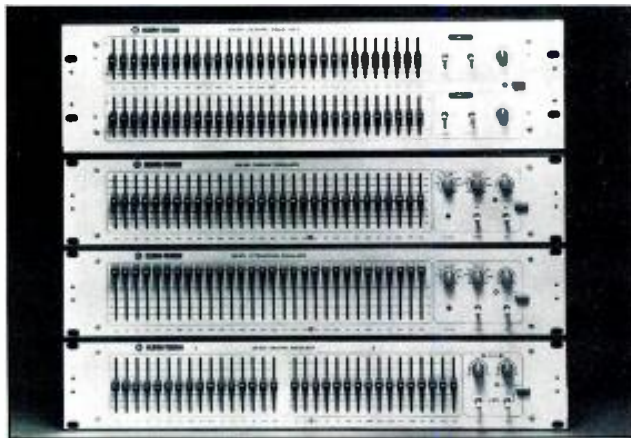


Klark-Teknik's new family of equalizers.

The capabilities of the Lexicon 224X digital reverberator have been expanded with the introduction of the LARC (Lexicon alphanumeric remote console), which displays the selected family of programs, specific program within the family, and parameters within the program; the LARC also permits cassette storage of set-ups. Split levels permit simultaneous use of two reverberations or reverberation with effects. Field conversion to the LARC for existing 224Xs is available.



Lexicon's 224X Digital Reverberator with LARC.


Beyer presented its MPC 50 Acoustical Boundary mic, which utilizes the increase in sound pressure level of acoustically live surfaces but does not pick up reflections from them. Also featured were the MC 736 and 737 Shotgun Condenser mics, both incorporating a 12 dB attenuation switch and a

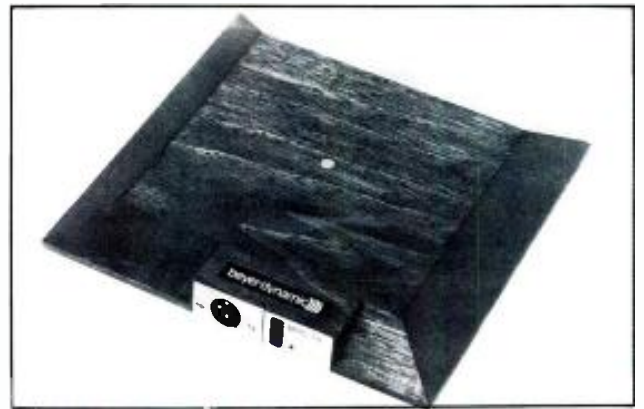

Beyer Dynamic's MPC 50 Acoustical Boundary Mic.

bass roll-off switch to compensate for the proximity effect.

Aphex provided aural excitement for the convention, especially with its Type B aural exciter. Type B has two independent channels in which settings can be matched for stereo effects, a mix control that varies the amount of enhancement fed back into the program, and a tuning control that adjusts the frequency range of the enhancement. The Aphex exciters use a psychoacoustic effect to restore presence, improve intelligibility, and increase perceived loudness without changing actual gain.

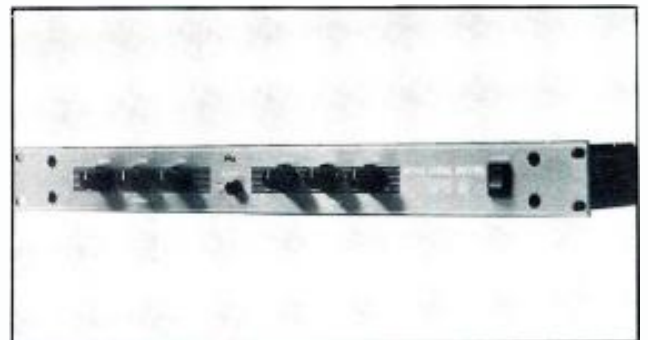

The Aphex Type B Aural Exciter.

BTX, SSL, NEVE

BTX demonstrated its Shadow SMPTE synchronizers and Cypher time code system, as well as the new Softouch transport controller. The Cypher can simultaneously read, generate, and character insert SMPTE/EBU code in both longitudinal and VITC formats. An RS 232/422 interface permits added versatility and expansion, while a plug-in relay option provides 16 programmable time code synchronizer contact closures. The Softouch controller interfaces with both the Shadow and Cypher systems and offers multimachine control of features such as record in/out, automatic dialogue replacement, and sound effects editing. The Softouch can store up to 16 production sequences simultaneously and recall them with a keystroke.

Solid State Logic promoted the advantages of sophisticated console control, as found on their 4000 and 6000 series consoles. Both consoles use extensive software programs to extend the flexibility of the mixing desk and reduce logistical overhead. The Total Recall System permits storage of all



BTX's Cypher Time Code System.

module settings, and the Real Time System permits the assembling of rehearsal presets into a performance sequence. All SSL computer programs are stored on a Program floppy disk, and user material such as track lists, cues, set-ups, mixes, presets, sequences, and events are placed on a Production disk. An optional printer may be fitted into the producer's desk for hard copy of mix parameters. There is not, however, a cigarette lighter built into the arm rest.



Neve's DSP, the world's first digital mixing system.

Neve has released a progress report on the development of its digital mixing console. Since the completion of the prototype DSP in 1981, over 300 users have evaluated its performance characteristics and contributed suggestions for its refinement. Presently, two digital consoles for BBC's OB and CTS studios are nearing completion. They feature direct

digital interfacing to digital recorders and digital transmission systems, programmability of controls, memory, and automation for all controls including faders, compressors, equalizers, pan pots and routing.

DASH

Finally, one of the major announcements at the convention involved a standard sure to influence coming generations of hardware. A new digital audio stationary head (DASH) standard was announced by Studer, Sony, Matsushita, and MCI/Sony in which the use of thin-film heads, low-speed formats, and the recommendations of the AES Standard Committee on Digital Audio are all provided for. Dash provides a format encompassing 2-channel ($\frac{1}{4}$ inch tape) to 48-channel ($\frac{1}{2}$ inch tape), with three tape speeds ($7\frac{1}{2}$, 15, 30 ips) that determine the number of coded data tracks. Both sampling rates of 48 kHz and 44.1 kHz are supported by the format at all three speeds. A newly developed modulation code, HDM-1, permits a longer recorded wavelength than that with MFM, the linear packing density is 38.4 kbits/inch, error protection employs Cross Interleave Code, and editing can be accomplished with punch-in, razor blade, or electronic editing.

The Technical Papers

Hidden somewhere amidst the frantic marketplace of exhibitors, the blurred vision of the hospitality suites, and the temptations of New York City nightlife, was the raison d'être for the convention—the opportunity to serve the Society's purpose of education and exchange of information concerning audio technology, in both theory and practice. Almost eighty technical papers (representing the work of over one hundred authors), nine workshops, special presentations and a tutorial representing over fifty speakers provided substantial insight into the state of audio recording. This 74th convention was exceptional in its success in combining the too often irreconcilable tasks of teaching and scientific discourse. It is to the Society's great credit that many professionals, as well as many students, were able to share in both endeavors. The range of topics and their levels of presentation was ambitiously planned and superbly executed. A look at the convention calendar should excite and fatigue even a casual observer, and bring restless reminiscences to those who participated in it.

SATURDAY

Technical Session—Digital Recording and Broadcasting
Workshop—Hands-On Digital
Tutorial—Digital Audio Topics
Presentation—Compact Disc

SUNDAY

Technical Session—Analog Signal Processing
Technical Session—Studio Design
Workshop—Economics of the Recording Studio
Workshop—Microphone Techniques for Stereo Video

MONDAY

Technical Session—Sound Reinforcement

Technical Session—Loudspeakers: Low Frequency

Alignment

Technical Session—Loudspeakers: Network Considerations

Workshop—SMPTE Code and Synchronization

Workshop—Console Troubleshooting

TUESDAY

Technical Session—Digital Signal Processing

Technical Session—Psychoacoustics and Subjective Testing

Workshop—Audio Production for Motion Pictures

Workshop—Multitrack Tape Machine Maintenance

WEDNESDAY

Technical Session—Test and Measurement

Technical Session—Disk Recording and Multichannel Sound

Workshop—Digital Recording Techniques

Workshop—Grounding and Shielding

The execution of this calendar required five days and the efforts of 150 authors and speakers; even the set of preprints available from the AES represents a year of challenging reading. In other words, any summary must be hopelessly incomplete. Nevertheless, I would like to document the topics which the technical papers covered and point out a few of the presentations which intrigued me or otherwise commanded my attention.

DIGITAL RECORDING AND BROADCASTING

The Digital Recording and Broadcasting session was chaired by Robert Adams of dbx and included papers concerning the use of thin film heads for digital recorders, channel coding for stationary head PCM, digital audio modulation using the PAL and NTSC formats, the ECC error code correction, labels and formatting, delta modulation, the digital audio stationary head DASH format, digital audio transmission via satellite distribution, Reed Solomon decoding with multiple passes, and a report of work on a digital audio compact cassette recorder.

The paper on thin film head design was authored by Yasuharu Shimeki, Misao Kato, Shiro Tsuji, and Hiroshi Matsushima of Matsushita Electric; it described the development of a 16 channel digital tape recorder employing $\frac{1}{4}$ inch tape. A thin film head permits this track width reduction and offers the following advantages: reduced power consumption, 20 dB reduction in head crosstalk, and reduction of peak shift using short wavelengths. A thin film head is constructed on a magnetically grooved substrate; the recording head uses a coil wound around the substrate and the groove is filled with a nonmagnetic material to reduce magnetic leak and improve efficiency. The reproduction head uses the MR magnetoresistive effect of ferromagnetic thin film. For linearity, magnetic unisotropy is imparted with a hairline formed on the MR film, thus providing a reduction in gap width and permitting shorter wavelengths.

Roger Lagadec of Studer and G. McNally of the BBC presented a paper on labels and their formatting. They outlined a format for a recordable and transmittable label track compatible with the AES/EBU serial digital audio interface. Labels could carry various kinds of information: operational data such as program duration, take number, and date; technical data such as wordlength, compression settings, and level settings; commercial data such as copyright information, and additional data such as performers and editorial. They proposed a label format of one label of 48 bits every millisecond, with a length of 192 sampling intervals per block and a 48 kHz sampling frequency, thus providing a transmission rate of 1000 labels of 48 bits per channel per second.

K. Murai, K. Iwakuni, and T. Kogure of Matsushita Electric presented a paper on new signal processing for a digital

audio cassette tape recorder. Following a discussion of the design criteria of such a system, they presented the specifications of a prototype digital compact cassette recorder with sampling rate of 44.1 kHz, 16 bit linear quantization, and triple parity error correction. Progress in vertical magnetic recording, thin film heads, and semiconductor technology should permit realization of this recorder in the near future.

The Digital Audio Stationary Head DASH format was introduced by Kogure of Matsushita, Toshi Doi of Sony and Lagadec of Studer. This format utilizes 16 bit audio samples recorded on dedicated tracks at 48 or 44.1 kHz sampling rate at speeds of 30, 15 and 7 $\frac{1}{2}$ ips, with the number of tracks being 2, 4, 8, 16, 32, 48 on $\frac{1}{4}$ or $\frac{1}{2}$ inch tape with multiple recording densities. Error protection, auxiliary tracks, etc. are all provided for. Embraced by three leading manufacturers, this format might provide the compatibility sorely needed in the digital recorder market. Just as 50 kHz succumbed to 48 kHz, will DASH prevail?

ANALOG SIGNAL PROCESSING

The Analog Signal Processing session was chaired by Robert Cordell of Bell Laboratories and included papers on audio level metering, active crossover designs, audiooptics, power amplifier output stage design, an operational voltage controlled (VCA) element, use of Walsh functions in an FM stereo demodulator, and sound system equalization.

The paper on audiooptics by George Bowley of Audiooptics Technologies provided a glimpse into the possible future of audio; audiooptics integrates optical and fiber-optics sciences with electronics-based engineering to reduce external interference, ground loops, electrical shock hazard, frequency response constraints, nonlinearity, and signal attenuation in transmission. Fiberoptics is taking a primary role in communications and sensing and signal processing applications; the author proposes that audio stands to gain much from this emerging technology.

STUDIO DESIGN

The Studio Design precis/poster session was chaired by Daniel Queen of Daniel Queen Associates and presented discussions on architectural acoustics and artificial reverberation, fluctuation statistics on the source/detection path, control room design, the Schroeder quadratic-residue diffusor, surround sound monitoring environments, design of a multi-format radio broadcast studio, tonal effects of classical music microphone placement, stereo/monaural compatibility, use of boundary-layer-effect microphones, and split track recording for ENG audio.

Greg Badger of Audiometric Laboratories and Chips Davis of LEDE Designs authored a paper on surround sound monitoring environments; they argued that TEF and the resulting improved understanding of psychoacoustics will permit a more sophisticated design of monitoring rooms. Both original soundfield via coincident microphone techniques and multitrack playback via panning could be successfully mixed in a properly designed room.

Skip Pizzi from National Public Radio discussed split track recording in which two audio tracks gather synchronized sound from two independent sources simultaneously; for example, two microphone interviews, language translation or ambience recordings that are later mixed to mono. At the cost of longer post production times, Mr. Pizzi argued for utilization of the multitrack capabilities inherent in the technique to achieve technically superior results.

SOUND REINFORCEMENT

The Sound Reinforcement session was chaired by Eugene Patronis of Georgia Institute of Technology and included papers on TEF techniques, effect of reinforcement system regeneration on gain and reverberation decay, computer-aided central loudspeaker array design, digital control of

array directivity, intelligibility modeling of a loudspeaker cluster, an improved colinear array, a constant-directivity defined-coverage horn, direction-sensitive gating, and a report on good old-fashioned passive acoustics.

Don Davis of Synergetic Audio Concepts outlined the Time Energy Frequency (TEF) concept of measurements of sound systems, stressing the orderly approach in measurements that TEF allows. Time domain is examined via ETC measurements; then frequency domain is examined with Nyquist phase plot, based on the results of the ETC. In addition, TEF perhaps holds the promise of identifying new transforms and new ways to view existing transforms. Implicitly suggested in the paper was that the Crown TEF analyzer is the largest back-ordered device since the IBM PC.

George Augspurger of Perception, Inc. and James Brawley of James Brawley Associates authored a paper on an improved colinear array for sound reinforcement. In the past, problems with loudspeaker line arrays have included pattern control, sound power and cost. In this new three-way design all transducers are positioned side by side to obtain better response in the horizontal plane and suppression of side lobes. The authors confessed to using 8 bit personal computer simulation to facilitate their work; acousticians are a lazy lot, but honest.

LOUDSPEAKERS

The Loudspeaker session on Transducers and Low Frequency System Alignments was chaired by John Eargle of JBL and JME Associates, and included papers on impulse testing of loudspeakers, amplitude of frequency modulation distortion, measurement of spatial reproduction quality with interaural cross correlation, optimizing for wide area imaging, a dual moving coil transducer, nonlinear distortion reduction, vented box design using root locus, and a high efficiency servo driven subwoofer.

Laurie Fincham of KEF delivered a paper discussing refinements in the impulse testing of loudspeakers. The author summarized the use of digital processing of a loudspeaker's impulse response to evaluate its frequency response, and detailed sources of measurement effort particularly at low frequencies. The author proposes a new method for measuring low frequency response, utilizing spectral shaping of the test signal to suit the unit under test, and digital post-production of the collected data—resulting in an accuracy of better than 1 dB from 20 Hz to 50 kHz with a measuring time of one minute in a nonanechoic environment.

The Loudspeaker session on Networks was also chaired by John Eargle and presented papers on passive three-way constant power and all pass crossovers, elimination of lobing error in multiway speakers, synthesized three-way crossovers, influence of crossover design on the power response of speakers with noncoincident drivers, a discussion of the complexity of the design philosophy for crossovers, and in-phase crossover design.

Eugene Zaustinsky of SUNY at Stony Brook delivered a paper with a question: Is sophisticated loudspeaker crossover design possible without sophisticated measurements? Specifically, can classical design approaches dealing with measurement of acoustic phase be avoided in favor of a design algorithm based solely on amplitude response measurements? Zaustinsky proposes a method that produces a crossover design limited only by driver response defects and enclosure diffraction effects. Knowledge of the location of the acoustic centers of the drivers facilitates the technique.

DIGITAL SIGNAL PROCESSING

The Digital Signal Processing session was chaired by James Moorer of Lucasfilm and included papers on a single stage sampling frequency converter, digital studio signal transmission and routing, a consumer auditorium simulator, a digital reverberator with early reflection control, design of a linear-phase digital equalizer, signal enhancement with digital signal processing, a digital audio console, and a digital audio control center.

Lagadec, D. Pelloni, and A. Koch of Studer presented a paper on a single stage sampling frequency converter—an improvement on the previous four stage digital filter converter. The new model utilizes one filter of length 1.8 million, can reverse modes without output discontinuity, and processes word lengths over 16 bits. Computation of coefficients in real time is aided by correlation between neighboring coefficients and efficiency of computation is increased with the use of an external processor.

Jeffrey Borish of Signal Research Laboratory authored a paper that described an auditorium simulator for home use. Early reflections that are normally excluded from stereo recordings are synthesized by the processor to augment the ambient information already contained in the recording. Two additional loudspeakers with noncritical placement are required.

Lagadec and Pelloni of Studer authored a paper on signal enhancement via digital signal processing in which a digitized audio signal is split into phase linear, complementary, narrow band signals for real time, time domain processing with enhancement algorithms. Recorded examples illustrated the tremendous potential of such a system, and the need for continued research on intelligent (perhaps artificially intelligent?) signal enhancement algorithms to differentiate between signal and unwanted signal.

PSYCHOACOUSTICS AND SUBJECTIVE TESTING

The Psychoacoustics and Subjective Testing session was chaired by Floyd Toole of the Canadian National Research Council and presented papers on the subjective importance of low frequency group delay, audible effects of time delays, phase distortion in anti-aliasing filters, perceived sound quality of high fidelity loudspeakers, subjective measurements of loudspeakers in stereo and monaural listening, measuring methods for headphones, evaluation of localization in surround sound, and a subjective comparison of five analog and digital tape recorders.

D. Preis and P. J. Bloom of the Electrical Engineering Department of Tufts University authored a paper on the perception of phase distortion of anti-aliasing filters using minimum phase 4 kHz and 15 kHz filters. Tests using broadband clicks showed that a cascade of up to four pairs of seventh order elliptic filters introduced no perceptible effects, with diotic presentation via headphones. Other tests using speech and music via loudspeakers await completion.

Martin E. G. Willcocks of Willcocks Associates and Greg Badger of Audiometrics authored a paper on localization and psychoacoustics in surround sound; extension of stereo to more than two loudspeakers has required a rethinking of localization. The authors proposed an extension of Mertens's theory to take into account multi-loudspeakers and localization cues for non-optimum speaker placement in which pairwise mixed discrete surround sound offers the best results.

Wieslaw R. Woszczyk of McGill University and Floyd M. Toole of the Canadian National Research Council authored a paper describing a comparison of two analog and three digital tape machines using double blind tests. Twelve listeners provided analytical ratings. Results showed that differences between machines were extremely small and, in fact, the differences between analog and digital were not readily distinguishable. Perhaps both analog and digital manufacturers breathed sighs of relief at this finding.

TEST AND MEASUREMENT

The Test and Measurement session was chaired by W. Marshall Leach, Jr. of Georgia Institute of Technology and included papers on the design of programmable distortion measurement systems, measurement of the distortion of frequency modulators and demodulators, measurement of digital audio system phase linearity, microcomputer post-processing for FFT analyzers, phonograph cartridge

evaluation with minishaker and TDS, and the HP-41 as a sound level measurement tool.

a sound level measurement tool.

Lagadec of Studer, who won the gold medal for trips to the speaker's rostrum, delivered a paper on the measure—the use of "square wave symmetry" as a criterion for linear phase response, being independent of amplitude response. A simple measurement of phase non-linearity is the amount of asymmetry in the response to a symmetrical square wave. Hardware involves only low-cost electronics. Phase compensation is also made measurable by the new figure of merit.

DISK RECORDING AND MULTICHANNEL SOUND

The Disk Recording and Multichannel Sound session was chaired by Duane H. Cooper. Papers were presented on ambisonics, surround sound decoders, models for record groove skipping, mastering techniques for test records, a perspective of stylus/groove interface, and a history of lateral tracking geometry and its effect on playback.

Michael Gerzon, consultant to National Research Development Corporation, presented a paper on ambisonics in multichannel broadcasting and video; the ambisonic UHJ encoding hierarchy for transmitting sound fields offers more mutually compatible upward applications to any

number of loudspeakers and permits options such as periphonic reproduction. It was pointed out that ambisonics encompassed quadraphonic systems and permits both broadcaster and listener to make their own approximation to the recreation of the original sound field with great compatibility to future applications.

WHAT IT ALL MEANS

I think this glance at the papers presented at the 74th convention confirms the fact that the science of audio recording and reproduction is operating in a healthy environment, characterized by new ideas and innovation. Analog techniques have achieved a zenith of fidelity and challenge the present limits of digital audio's new technology. Clearly both technologies will compete for years to come, with analog reluctantly stepping aside only when digital has proved itself against analog's high standards. The audio community has also turned its attention to other facets of the science—surround sound and the importance of more sophisticated image placement and the creation of artificial acoustical environments have surfaced as new terrain to explore. Thanks to audio researchers such as those present at the AES convention, the sound of recorded music promises to get better and better. ■

MODERN **RECORDING** & MUSIC

Because you are ... creatively involved in how sound is produced and reproduced, and are serious about creating and recreating music both live and recorded. **Modern Recording & Music can help you develop your talent. *Subscribe Now.***

1120 Old Country Rd. Plainview, NY 11803
(516) 433-6530

011C


I wish to subscribe renew today and save \$16.00.
\$15.00 for 12 issues—Save \$8.40. \$26.00 for 24 issues—Save \$20.80.
 Check money order enclosed for the amount of \$ _____

My account number is: Visa Mastercharge

Name _____ Exp. Date: ___/___/___

Address _____
City _____ State _____ Zip _____

(Foreign subscribers add \$3 for each year. Foreign subscriptions payable ONLY in U.S. funds by international draft or money order.)

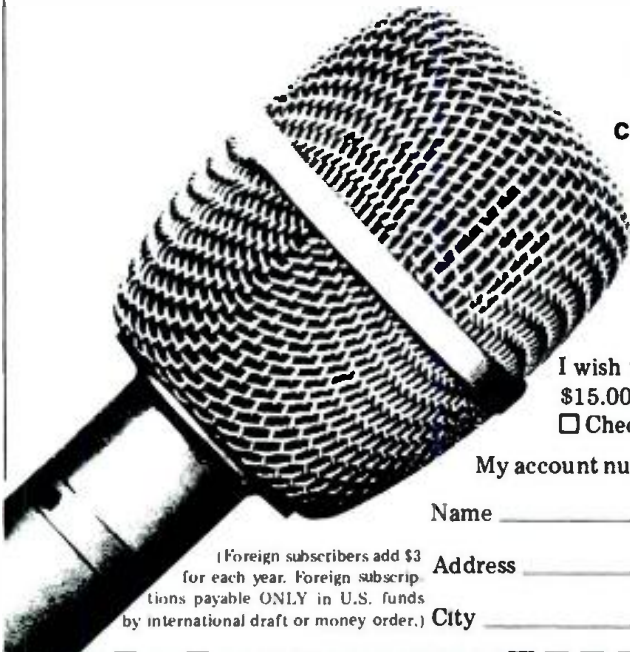

New Products

WIRELESS AUDIO LINK

• The Precision Audio Link (PAL) system gives flexibility to acoustic engineers by providing a precision wireless link between sound measurement points and analysis and recording instrumentation. It is intended for remote acoustic measurements, sound contractor data analysis, sound reinforcement installation measurements and sound system maintenance. The audio bandwidth—20 Hz to 20 kHz—coupled with 100 dB dynamic range and 5 ppm frequency tolerance, results in complete transparency of the audio signal. The PAL system is compatible with TEF analyzers and spectral analysis equipment, as well as most sound level meters and calibrated microphones. The PAL system was developed with the support of Don Davis of Syn-Aud-Con.

Mfr: HM Electronics, Inc.

Price: \$2,200.00

Circle 48 on Reader Service Card

Circle 48 on Reader Service Card




MICROPHONE ACCESSORIES

• Beyer Dynamic offers a complete line of microphone floorstands and booms to complement their microphones. The ST 201 A/1 microphone stand features height adjustment ranging from 36 to 64 inches and can be used with a boom. It also includes 13-inch heavy-duty screw-in legs, a two section telescopic column, and a noiseless screw-type locking device. The ST 210 A/1 mic stand includes the ST 201 A/1 floor stand and the SCH 211 lightweight boom arm, which extends to a maximum length of 30 inches and can be pivoted through 360 degrees in any two planes. The ST 201 A/2 mic stand is similar to the ST 201 A/1 but

features 13-inch heavy-duty folding legs and a sliding base. The ST 210 A/2 mic stand includes the ST 201 A/2 floor stand and the SCH 211 lightweight boom. The ST 259 is a low-profile microphone stand with a noiseless screw-type locking device and 10-inch fold-away tubular legs. The Beyer ZMS 2 is a microphone bar for the mounting of two microphones on one floor stand. The maximum spacing between the microphone fixing points is 7.8 inches, making the ZMS 2 ideal for mic'ing rack toms.


Mfr: Beyer Dynamic

Circle 49 on Reader Service Card

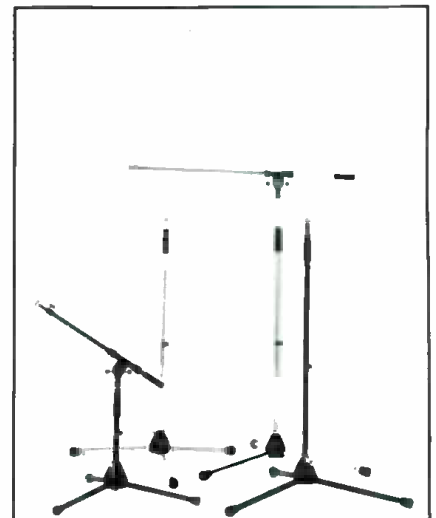

BI-RADIAL HORN

- The Model 2386 Bi-Radial Constant Coverage Horn provides uniform on- and off-axis frequency response (from 500 Hz to 16 kHz in the vertical plane), with a nominal 40×20 degree coverage angle. The 2386 has been designed for flush cabinet mounting or compact cluster installations. The performance of the new flat-front 2386 simplifies cluster design, minimizes the need for horn overlapping, and virtually eliminates lobing and comb filter effects. Computer-aided techniques were employed to derive the horn contours in the horizontal and vertical planes; this design yields smooth response, low distortion, and even coverage, avoiding the performance disadvantages of sharp flare transitions and flat side-walls. The 2386 is constructed of injection-molded reinforced polyurethane. The horn's small vertical mouth dimension (slightly larger than the compression driver used to drive the horn) allows compact single and multiple horn/driver systems to be assembled. Should vertical pattern control be needed below 2 kHz, two or more horns

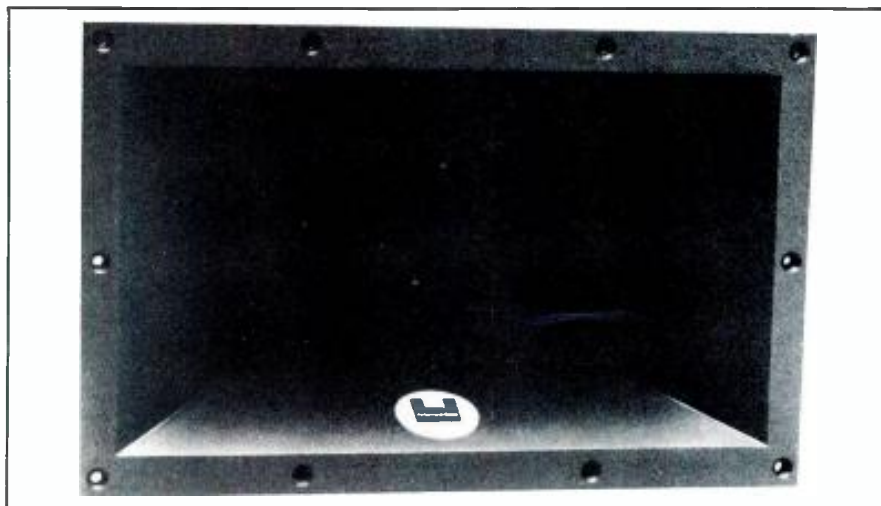

may be stacked vertically to restore full Bi-Radial performance. The 2386 will accept JBL's 2-inch diameter 2441, 2445 or 2482 compression drivers. With the addition of the 2327 adaptor, the

horn also will accept the 1-inch throat 2525 driver.

Mfr: JBL

Circle 50 on Reader Service Card

NOISE REDUCTION SYSTEM

- Rocktron Corporation's System One encode/decode noise reduction is an advanced system in an unbalanced format. Available in two, four, or eight channels, it is designed to be used with high speed recording equipment (15 ips, 30 ips) that is capable of providing flat frequency response (± 1 dB from 30 Hz to 20 kHz). System One's innovative design takes advantage of today's improved magnetic tape. It effectively doubles dynamic range by compressing the dynamic range onto the tape during the recording process and expanding it upon playback. This allows the user

to record the full dynamic range of the source. The System One greatly improves recording capabilities while decreasing distortion caused by tape saturation and eliminating tape hiss. It provides effective noise reduction greater than 40 dB, and is claimed to be the first companding noise reduction system to eliminate the obtrusive side effects of modulation noise (breathing), and pumping. System One's design, using high quality components and tightly matched encode/decode response, provides a transparent system without coloration. In addition, System

One operates over the entire audio range offering effective noise reduction at all frequencies, requires no level matching between encode and decode (which allows easy set-up and operation), is fully simultaneous (no switching) and capable of off-tape monitoring of separate channels, and is warranted for three years on parts and labor.


Mfr: Rocktron Corporation, Inc.

Price: Model 120 (2 channels) \$319.00

Model 140 (4 channels) \$469.00


Model 180 (8 channels) \$829.00

Circle 51 on Reader Service Card

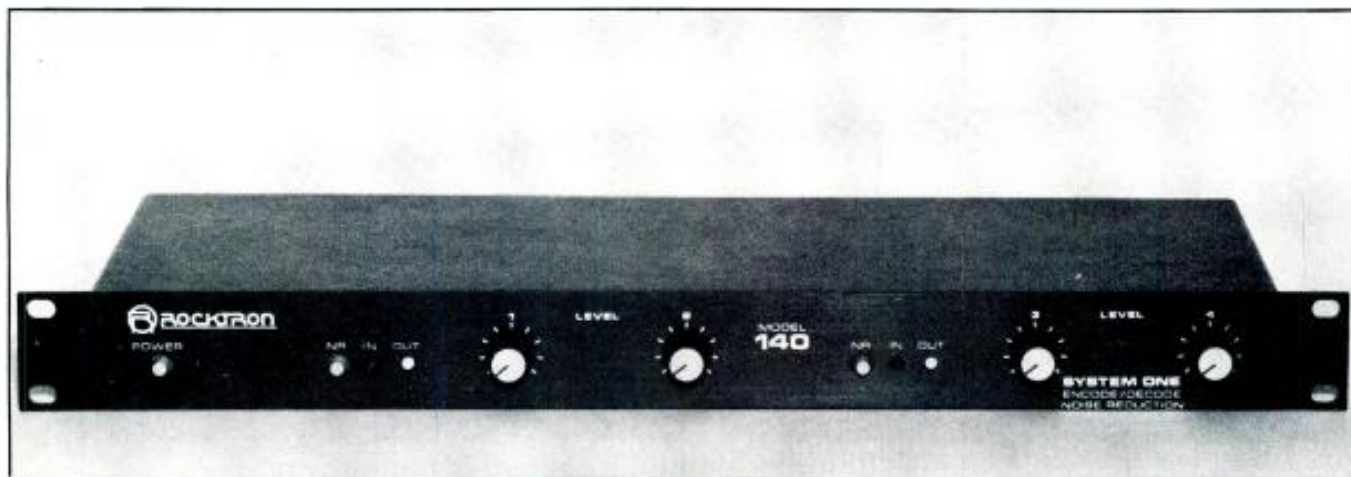

ISO-BALANCED PREAMP

• JBA Research LTD's new "iso-balanced" preamp, the JBA-207, uses a discreet bipolar transistor design which provides superior audio performance in conjunction with excellent isolation—without the use of transformer coupling. The preamplifier is specifically designed to interface any musical instrument with an audio mixing console. The "iso-balanced" design surpasses conventional balanced systems, providing up to 50 dB greater rejection of ground-loop noise. This eliminates the need for any type of transformer coupling. The JBA-207 Iso-balanced Preamp has two outputs: a high-impedance ¼-inch phone plug output and a low-impedance XLR iso-balanced output. The preamp may be powered by either a 9-volt battery or phantom power. Several other features include a ground-lift switch, ⅛-inch-thick aluminum construction, an input impedance greater than one megohm handling a 3-volt peak-to-peak input

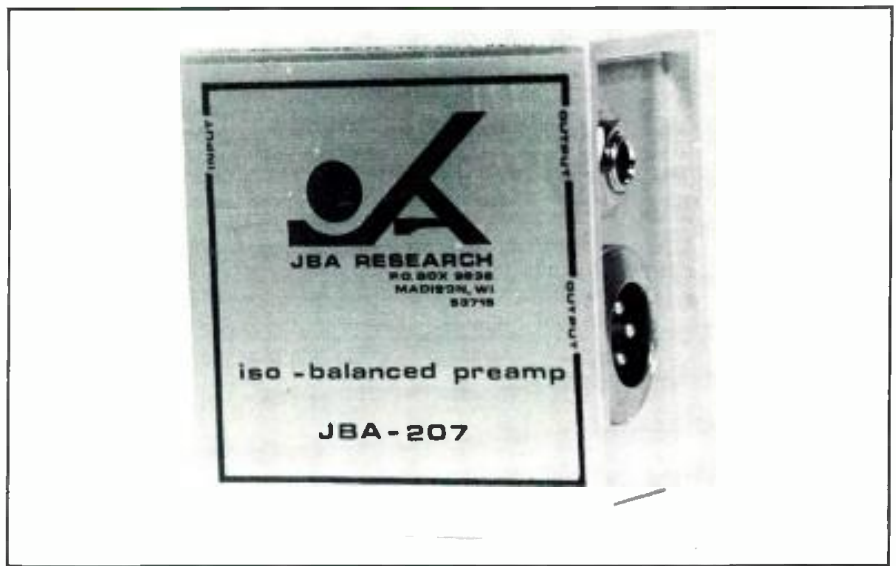

signal, and THD less than 0.01 percent. There is unity gain at the high-impedance output and 10 dB of gain into 600 ohms at the low-impedance output. Current users of the JBA-207 include

Leon Redbone, Arlo Guthrie, and Fantasy Studios.

Mfr: JBA Research, LTD

Circle 52 on Reader Service Card

WIRELESS MICROPHONE RECEIVER

• Cetec Vega's new Model R-42 Pro Plus Wireless Microphone Receiver features "infinite gain" technology, ultra-low noise, true dual-receiver diversity, and switch-selectable Dynex® II, an advanced new audio processing technique. System dynamic range with Dynex II is typically 108 dB, A-weighted (maximum deviation to noise floor). With Dynex II switched out, the ULNR (ultra-low noise receiver) has a 92 dB (A-weighted) signal-to-noise ratio. Highest adjacent-channel rejection is achieved with 16 poles of IF filtering. The preselector is a true four-pole helical resonator filter (silver-plated). "Infinite gain" technology provides the best possible signal-to-noise ratio at low signal levels and improved processing of multi-path RF signals. Mu-metal shielding for the power transformer and other critical circuitry eliminates hum and powerline noise. The R-42 diversity (or R-41 non-diversity) Pro Plus receiver provides excellent system performance when combined with the 77 Dynex II bodypack transmitter or the Model 80, 81, or 82 hand-held transmitter.

Mfr: Cetec Vega

Circle 53 on Reader Service Card



db is the 1

Is your ad in the magazine with the largest circulation?

db is the 1

Is your ad in the magazine whose authors are the leaders in their field?

db is the 1

Is your ad reaching more of the decision makers in the broadcast and recording markets?

db is the 1

Is your ad being seen every month?

db is the 1

***Your ad can be in the
number 1 magazine—db***

**For more information write or call us at:
1120 Old Country Rd, Plainview, N.Y. 11803 (516) 433-6530**

CABLE SYSTEMS

• Canare Cable, Inc. manufactures a full line of bulk and pre-wired cables, junction boxes, pigtails, multi-pair cables, and multi-pin cable assemblies that carry high quality signals without degradation or significant loss. Of special interest is Canare's L4E Series Star-Quad audio cable. This four-conductor cable consists of two twisted pairs plus a high-density braided shield. Because each conductor in the balanced cable actually consists of a twisted pair, the included area between conductors is minimized, maximizing the rejection of AC hum and all forms of electromagnetically induced noise. According to Canare, the resulting noise immunity is 10 times better than standard balanced mic cables. Special cable types are offered to suit the specific technical interface requirements of mic and line level audio, video and musical instrument circuitry. For better identification and visual appeal, guitar cables are available in five colors and microphone cables in ten colors. Cable storage and transportation are simplified with Canare cable reels and cable reel systems. The reels are available for single cables or large multi-pair cables, with or without connector panels. Several models come with three-position brakes that regulate tension or lock the reel completely. Most reels can be stacked for storage and easy pulling of long lines, and some models have roll-around casters. Canare also offers a variety of low-crosstalk multi-pair cables for construction of custom "snakes." Factory-wired 8- to 32-channel snakes are also available with multi-pin connectors that mate either to junction boxes or XLR pigtails. Special combinations of optimized audio, video, and communications cable in one multi-conductor bundle come in five common remote truck formats.

Mfr: Canare Cable, Inc.

Circle 54 on Reader Service Card



TWO NEW MICROPHONES

• Shure Brothers, Inc. has added two new models to its popular PE (Professional Entertainer) series of moderately priced microphones. The two new models, PE86 and PE66, are unidirectional (cardioid), dual low-impedance models with shock-mounted cartridges for quiet, reliable operation. The PE86's frequency response is 50 to 15,000 Hz; the PE66's is 40 to 15,000 Hz. Both models feature a fixed bass roll-off and the upper midrange presence peak that provides the well-known "Shure sound." The PE86 also features a built-in spherical windscreen to minimize wind and breath noise. The PE86 and PE66 are each packaged with a professional swivel adapter and a vinyl gig bag.

Mfr: Shure Brothers, Inc.

Price: PE86L-LC: \$125.00

PE66L-LC: \$109.25

Circle 55 on Reader Service Card



PROFESSIONAL INTERFACE UNIT

• Audio + Design's PROPAK™ Professional Interface Unit lets audio engineers make use of semi-professional and even domestic hi-fi equipment such as digital (EIAJ) video recorders, Compact Disc players, and cassette machines. PROPAK I is designed to facilitate a professional interface for the abovementioned equipment. At the "pro" end of the unit, XLR connectors are provided and gain can be adjusted for any professional operating level. Inputs and outputs are electronically balanced with +24 dBm headroom. On the "semi-pro" end, gold-plated phono sockets are used. Send and Return levels are adjusted on pre-sets to meet whatever operating levels are required, and the unit is AC powered. PROPAK II with CTC™ (Coincident Time Correction) includes all of the above and is also switchable for use with digital recorders operating to the EIAJ standard (eg., Sony PCM F1) to produce a time coincident digital stereo track. Normally, with the EIAJ format, the inputs and outputs are multiplexed so that the recording has a time delay between channels. When reproduced through the D/A, this is corrected. However,



taking a direct digital output means that tapes recorded this way are not 1610 or Compact Disc compatible because the signals are not time coincident. PROPAK II provides a cost effective solution while maintaining playback compatibility with the PCM F1.

Distortion is less than .003 percent at 1 kHz; dynamic range is 125 dB; and frequency response is 0 to -0.25 dB (20 Hz to 20 kHz).

Mfr: Audio + Design

Price: PROPAK I: \$240.00

PROPAK II: \$290.00

Circle 56 on Reader Service Card

MATRIX MIXING CONSOLES

• Pulsar Labs' 80 and 40 Series Matrix Mixing Consoles are totally modular, allowing the user the option of adding signal processing modules such as four-channel compressor/limiters, dual 10-band equalizers, reverbs, and dual stereo mixdown modules. Full patching is accomplished by access in and out jacks on all modules. Both consoles are suited for live as well as studio recording. Pulsar 80 and 40 Series boards have flexible matrix mixing capabilities which allow eight independent mixes of eight separate groups. All Pulsar mixing consoles come with a solid oak frame with steel sub-frame and a three-year warranty.

Mfr: Pulsar Labs, Inc.

Circle 57 on Reader Service Card




TWO-WAY SPEAKER SYSTEM

• Electro-Voice's new two-way speaker system, the FR15-2, is intended for sound reinforcement applications where a wide, controlled coverage angle and high efficiency are desired. Low frequencies are handled by a rugged 15-inch EVM-15L Series II woofer mounted in a 4.3-cubic foot optimally vented enclosure. Frequencies above the 15 kHz crossover point are handled by a compression driver on a 90 degrees by 40 degrees constant-directivity horn. Unlike conventional horns, EV's constant-directivity horn maintains its rated beamwidth (90 degrees horizontal, 40 degrees vertical) to the highest frequencies, assuring broad, uniform coverage. The frequency response of the FR15-2 is essentially flat from 50 Hz to 15 kHz. The speaker's sensitivity is rated at 98 dB SPL with a 1-watt input, measured at 1 meter on axis. The long-term power-handling capacity is 200 watts, measured using shaped pink noise with a 6 dB crest factor. The FR15-2 weighs 94 lbs. and measures 28 $\frac{3}{8}$ -in. high by 31 $\frac{1}{2}$ -in. wide by 16 $\frac{1}{8}$ -in. deep.

Mfr: Electro-Voice

Circle 58 on Reader Service Card

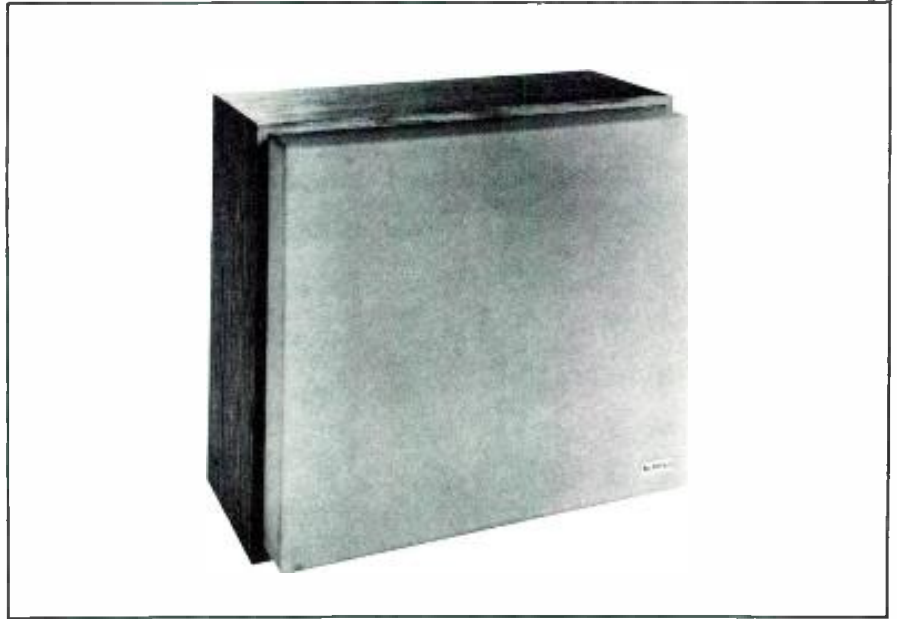

STUDIO RIBBON MIC

• Audio Engineering Associates' Coles 4038 studio ribbon microphone is the culmination of 30 years of development and usage by such organizations as the BBC. The ribbon material is a carefully selected pure aluminum foil which is corrugated and precisely tensioned between highly permeable pole pieces. A slightly magnetic woven screen mounted on each side of the ribbon gives a precise degree of damping and acts to prevent over-stressing of the ribbon under accidental wind-blasts. The ribbon itself combines the functions of a very low mass, critically damped acoustical diaphragm and a low resistance half-turn dynamic coil. The ribbon and pole piece shapes have been optimized for flat frequency response with a higher output efficiency than earlier models. The moving mass of the ribbon is only about 1/500th that of most dynamic moving coil microphone systems, and is easily tuned to a very low basic frequency. All of these features give the microphone a very

flat and extended bass response. All microphones tend to suffer a change in the directional (polar) response at high frequencies due to their physical size in comparison to the sound wavelength. The 4038 ribbon and pole piece system is completely symmetrical in the horizontal plane. Combining this with the short vertical length of the ribbon and the acoustically compensating design of the microphone casing helps to maintain a constant shape of the polar response of both planes. The low impedance connections to the 4038 ribbon are made by means of a symmetrical cage of bars dispersed about the ribbon, forming a "humbucking" system giving a high degree of electromagnetic rejection. This low impedance system is substantially earthed against electrostatic interference, and the small toroidal matching transformer feeding to the line is effectively shielded.

Mfr: Audio Engineering Associates

Circle 59 on Reader Service Card



PRO SOUND WOOFER

• The DL15X 15-inch, 8-ohm low frequency driver is designed for high-level monitoring and sound reinforcement. The high-performance drive system of the DL15X is augmented by two Electro-Voice features: the Thermal Inductive Ring (TIR)[™] and the PROTEF[™] coating. The TIR provides a significant heat transfer path from the top of the voice coil while simultaneously moderating the normal inductive rise of the voice coil. PROTEF, a Teflon-based protective coating, is applied to the inside diameter of the top plate adjacent to the voice coil. It provides protection by lubricating any rubbing contact and inserting electrical insulation between the coil and the top plate. The specifications of the DL15X include a frequency response of 45 to 3200 Hz \pm 3 dB (in a 6.4-cubic foot enclosure tuned to 42 Hz); a 500 watt long-term-average power capacity per AES Recommended Practice (100 to 1000 Hz), and a sensitivity at 1 meter, 1 watt (average from 200 to 4000 Hz) of 102 dB. EV offers the DL15X with a choice of computer-optimized enclosures for various applications. The 3.2-cubic foot TL606 enclosure with a



low-frequency 3-dB-down point (f_3) of 63 Hz is available for those applications demanding a compact enclosure. Alternatively, the 6.4-cubic foot enclosure has a low-frequency cutoff of 45 Hz. In

their step-down modes, with appropriate equalization, the f_3 's of the two enclosures are 45 and 34 Hz respectively. *Mfr: Electro-Voice, Inc.*
Price: \$250.00


Circle 60 on Reader Service Card

MULTI-BAND PROCESSOR

• Audio + Design's S27 4-Band Crossover/Summing Amplifier allows the SCAMP Card Modular System to be configured as a cost-effective high quality multi-band processing system for loading the final medium, whether it be broadcast transmitters, tape, disc, Compact Disc, or sound reinforcement. The basic building blocks of the processor are the S27 Crossover/4-Band Processor Module and four SO1 Compressor/Limiter modules (one for each band) for a mono system (or double those quantities for stereo). The flexibility of the SCAMP system allows additional functions to be added at any time to the basic system, such as S100 Gate or F300 Expander for single-ended noise reduction in any or all of the frequency bands; an SO7 Octave Equalizer for overall frequency shaping (particularly applicable to AM stations); an SO6 Dynamic Noise Filter for the elimination of tape hiss; an SO8 2 by 8 Distribution Amplifier for clean distribution of the audio signal around the station/studio, to or from the processor, and an SO2 Transformerless Microphone Preamp, additional SO1 Compressor, and S25 De-esser for all microphone/voice lines.

Mfr: Audio + Design Recording, Inc.

Circle 61 on Reader Service Card

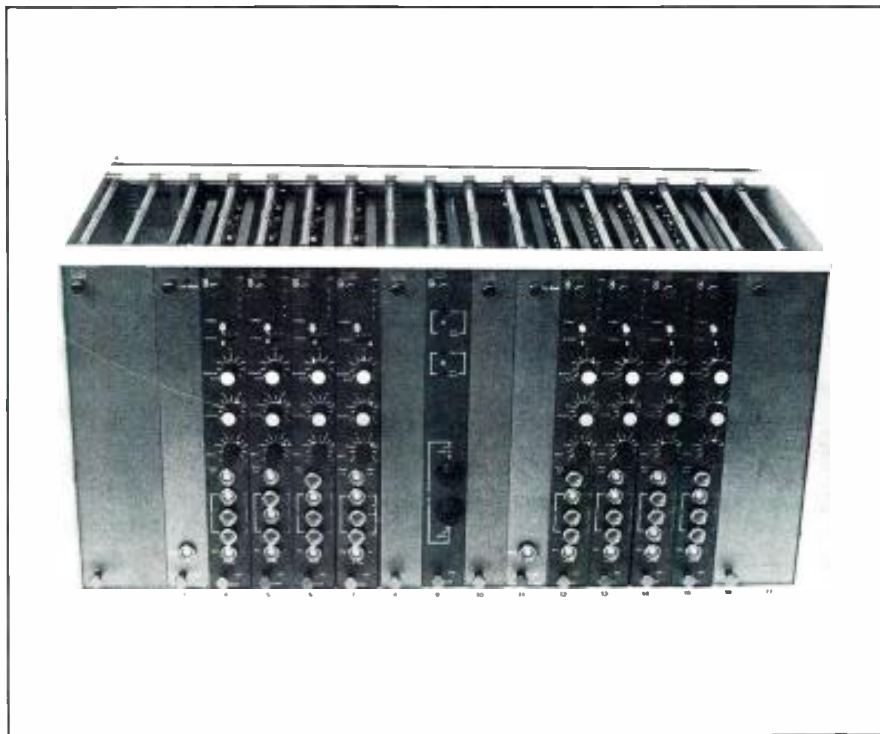

12-CHANNEL PORTABLE MIXER

• The MX-P61 is a 12-channel multi-purpose portable mixer small enough to fit into a standard 19-inch rack, yet equipped with a large number of functions. The MX-P61 features all transformerless balanced input and output circuitry for optimal signal clarity. Each of its 12 input channels is equipped with Cannon-type connectors for either microphone or line inputs. There are four line outputs and three auxiliary outputs. Fully comprehensive monitor-

ing and talkback sections are provided. The mixer also features three-band equalizers on each input, choice of VU metering or LED peak program meters, high- and low-cut filters, two stereo output limiters, and choice of AC or 12 volt DC power operation. The MX-P61 also offers selectable 48V or 12V AB phantom power and selectable line/auxiliary output reference levels of +4, +6, +8 dBm.

Mfr: Sony Professional Audio Products
Circle 62 on Reader Service Card




DIGITAL DELAY/PITCH CHANGER

• Advanced Music Systems' DMX 15-80S is a dual-channel modular system that can be expanded to give up to 32 seconds of delay at 18 kHz bandwidth and a 90 dB dynamic range. Features include keypad depth, phase reversal lock-in, and information

storage by way of non-volatile memory. Two pitch changers with "de-glitch" module can be added, and software allows digital audio editing of locked information.

Mfr: Advanced Music Systems, Inc.
Circle 63 on Reader Service Card

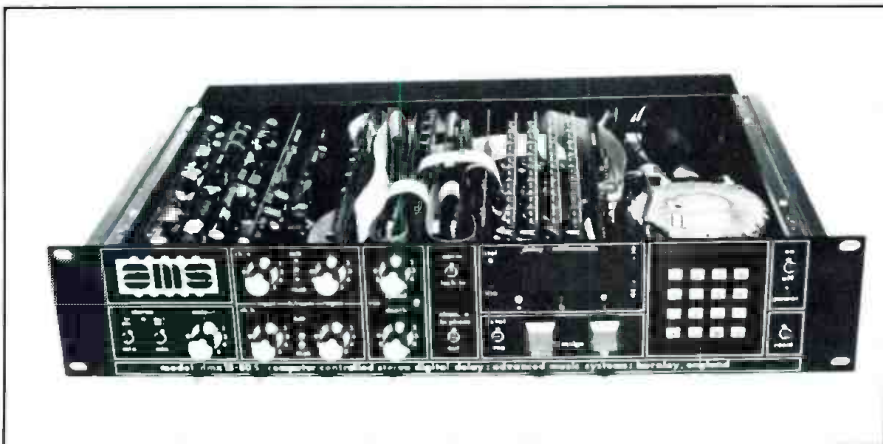

Polyline Corp.
REELS & BOXES
 FOR AUDIO AND VIDEO TAPE
 PROFESSIONAL QUALITY
ALL SIZES
 Shipped from Stock
 (312) 297-0955
 1233 Rand Road
 Des Plaines, IL
 60016

33

Circle 28 on Reader Service Card

Introducing
THE
SOUND EFFECTS
LIBRARY
FOR
PROFESSIONALS

- 3000 STEREO EFFECTS
- 30 HOURS OF SOUNDS
- 125 TAPES at 7½ or 15ips
- PRICED FROM \$1500.00
- NO ROYALTY PAYMENTS EVER

"Some of our Clients."

- * ABC
- * NBC
- * CBS
- * Walt Disney



86 McGill Street,
 Toronto, Ontario,
 Canada, M5B 1H2
 (416) 977-0512

Circle 30 on Reader Service Card

db Bookcase

Please indicate the number of copies of each title you want and enclose check or money order for the total amount.

1 2 3 4 6 28 36 39 40

Sagamore Publishing Co.
1120 Old Country Road
Plainview, New York 11803

Total payment enclosed \$ _____ (Include N Y S sales tax if applicable, or \$1 00 per book foreign)

Name _____

Address _____

City, State, Zip _____

Check must be in U.S. funds drawn on a U.S. bank.

1. The Technique of the Sound Studio. *Alec Nisbett.* A handbook on radio and recording techniques whose described principles are equally applicable to film and television sound. 60 diagrams, glossary, index. 264 pages. Cloth **\$32.95**

2. Sound Recording (2nd ed.) *John M. Eargle.* A graphic, non-mathematical treatment of recording devices, systems and techniques and their applications. Covers psychoacoustics, physical acoustics, console automation, signal processing, monitor loudspeakers, basic microphone types, audio control systems, stereophonic and quadraphonic sound, magnetic and disk recording, and devices used to modify basic recorded sounds. 320 pages. **\$22.95**

36. The Handbook of Noise Control (2nd ed.), *Cyril M. Harris.* Leading noise control authorities share their strategies and know-how in this in-depth treatment of all aspects of noise control. Tables facilitate rapid solutions to practical problems, and illustrations show noise control techniques for a range of common problems. Coverage includes the social, psychological, physiological, and legal aspects of noise and noise control. Hardbound. **\$57.50**

3. Acoustic Design. *M. Rettinger.* New. THIRD edition completely revised. Covers room acoustics and room design, with many practical examples. 1977. 287 pages. **\$24.50**

40. Studio Acoustics. *M. Rettinger.* The author provides those first design principles of sound recording studios that are required for satisfactory vocal and instrumental recording conditions. All equations are presented in both English and MKS systems of measurement. Metric equivalents follow in parentheses when the studio descriptions include linear dimensions. The book is divided into three sections: Basics, Studios and Electroacoustics 241 pages. **\$35.00**

6. Sound System Engineering. *Dön and Carolyn Davis.* The first of its kind, this book is the one source of sound information you can rely on to give you everything you must know to design, install, and service commercial sound systems. The book covers acoustics environments, design applications, equalizing, installations, and interfacing. Hundreds of drawings, photos, charts, and graphs are supplied. 1975. 296 pages. Hardbound. **\$21.95**

39. Reference Data for Radio Engineers. *ITT Staff* 5th Ed. The latest edition of one of the most popular reference books for radio and electronics engineers, as well as for libraries and schools. Complete, comprehensive reference material with tables, formulas, standards and circuit information. 45 chapters, 1,196 pages with hundreds of charts, nomographs, diagrams, curves, tables and illustrations. Covers new data on micro-miniature electronics, switching networks, quantum electronics, etc. **\$34.95**

28. Environmental Acoustics. *Leslie L. Doelle.* Applied acoustics for people in environmental noise control who lack specialized acoustical training, with basic, comprehensible, practical information for solving straightforward problems. Explains fundamental concepts with a minimum of theory. Practical applications are stressed, acoustical properties of materials and construction are listed, actual installations with photos and drawings are included. Appendixes illustrate details of 53 wall types and 32 floor plans, and other useful data. 246 pages. **\$49.50**

4. Noise Control. *M. Rettinger.* Revised and enlarged into a separate volume. Covers noise and noise reduction, measurement and control. Several graphs and charts. 1977. App. 400 pages. **\$28.50**

Look what USO is Doing Today for Those Far From Home!

For those of us in the service and our families too, USO is like a shopping list. We just pick out which of the many things USOs offer to help us: classes, tours, recreation events, family group meetings, child care co-ops, ticket services, snack bars, language sessions, crafts groups, community projects, intercultural events, travel assistance, holiday programs, phone call service... and much more.



the three most important letters in helping others

Support USO through the United Way, OCFR, or local USO campaign.

Classified

Closing date is the fifteenth of the second month preceding the date of issue.

Send copies to: Classified Ad Dept.
 db THE SOUND ENGINEERING MAGAZINE
 1120 Old Country Road, Plainview, New York 11803

Minimum order accepted: \$25.00

Rates: \$1.00 a word

Boxed Ads: \$40.00 per column inch

db Box Number: \$8.50 for wording "Dept. XX," etc.

Plus \$1.50 to cover postage

Frequency Discounts: 6 times, 15%; 12 times, 30%

ALL CLASSIFIED ADS MUST BE PREPAID.

Superb British CHILTON 12x4 Mixer w/ compressors, 8 param. EQ's: \$2500. TEAC 80-8 w/dbx: \$2000, MIC MIX MastrRm Stereo Reverb: \$600, 2 SY-METRIX Gates: \$200; \$5000 for all plus mic stands, DI boxes, many extras. (212) 966-4865.

AGFA CHROME and normal bias BLANK CASSETTES. CUSTOM LOADING to the length you need. Your music deserves the best—your budget deserves a bargain. GRD P.O. Box 13054, Phoenix, AZ 85002. (602) 252-0077.

LO*KATOR 2! ADD-ON Digital Tape Counter. New design. Lowest Cost. Put bright, big digit readout anywhere in your studio. Upgrades older Ampex, Scully, any reel recorder. KIT \$125. A&T \$145. Postpaid. Guaranteed. DON'T BE LOST WITHOUT IT! SUPERTEK, 8515 Wedderburn Lane, Vienna, VA 22180 (703) 698-5704.

PRO AUDIO IN STOCK—ready to ship. Top lines, top dollar trade-ins, clearance specials. Call or write for our prices. Professional Audio Video Corporation, 384 Grand Street, Paterson, NJ 07575 (201) 523-3333.

CASSETTE DUPLICATION IN real time from 10-10,000. Nakamichi cassette decks used for optimum quality. Best rates, labels, inserts and shrink wrap available. Fast turn around. Audiohouse (303) 751-2268.

FOR SALE: Scully 280—8 track. Good Condition. Best offer. Reason for selling—gone 16 track. Birch Recording Studio (301) 943-8141.

FOR SALE

PACHBURN AUDIO NOISE SUPPRESSOR
 For all recorded sound media

The choice of recording industry, archives and collectors around the world

Three processors for reduction of transient and steady-state noises. Plus special features for optimum reproduction of old records, lateral or vertical

Mono model \$1,950; Mono/Stereo \$2,450

Write for literature to:
 P.O. Box 335 Dewitt NY USA 13210-0335

FREE 32pg Catalog & 50 Audio/Video Applic.

PHONO, MIC, TRANS, ACN, TAPE, VIDEO, LINE, OSC

Stereo/Mono Pwr. Ampl. 8-in/2-out, 12-in/4-out, 16-in/4-out

Video & Audio Dist. Ampl. TV Audio & Recd Prod Consoles

OPAMP LABS INC (213) 934-3566
 1033 N Sycamore Av LOS ANGELES CA, 90038

DIRECT FROM BROADWAY

USED SOUND EQUIPMENT SALE

PETER PAN • FIDDLER • CAMELOT
 KING & I • CHORUS LINE • DOLLY
 Wireless Microphones
 Used By The Stars

AMPS • MIXERS • RECORDERS
all guaranteed

SOUND ASSOCIATES, INC.
 424 WEST 45 ST. • N.Y., N.Y. 10036
 TELEPHONE 212-757-5679

BLANK AUDIO AND VIDEO CASSETTES direct from manufacturer, below wholesale, any length cassettes: 4 different qualities to choose from. Ampex and Agfa mastertape—from 1/4-inch to 2-inch. Cassette duplication also available. Brochure Andol Audio Products, Inc., Dept. db, 42-12 14th Ave., Brooklyn, NY 11219. Toll free 1-800-221-6578, ext. 1, NY residents (212) 435-7322.


COINCIDENT RIBBON (FIGURE 8) STEREO MICROPHONE. Unbeatable separation and imaging. Send \$1.00 for demo and information. Spelden & Associates, 1216 Denmark Rd., Plainfield, NJ 07062.

FOR SALE—AKG C-24 and other tube type condenser mics. (415) 441-8934 or 527-6167.

24x4x2 Neotek PA Console, 1-6 switchable E.Q., 16 channel Stevenson monitor board, mics and stands, ST350B E.V. tweeters, White 1/3 octave E.Q. and more. All like new. Call (914) 679-6093.

MICROPHONES. Immediate delivery via UPS. All popular models in stock. Best prices you'll see in '83; PLUS we pay freight. UAR Professional Systems, 8535 Fairhaven, San Antonio, TX 78229. (512) 690-8888.

THE LIBRARY... Sound effects recorded in STEREO using Dolby throughout. Over 350 effects on ten discs. \$100.00. Write The Library, P.O. Box 18145, Denver, CO 80218.

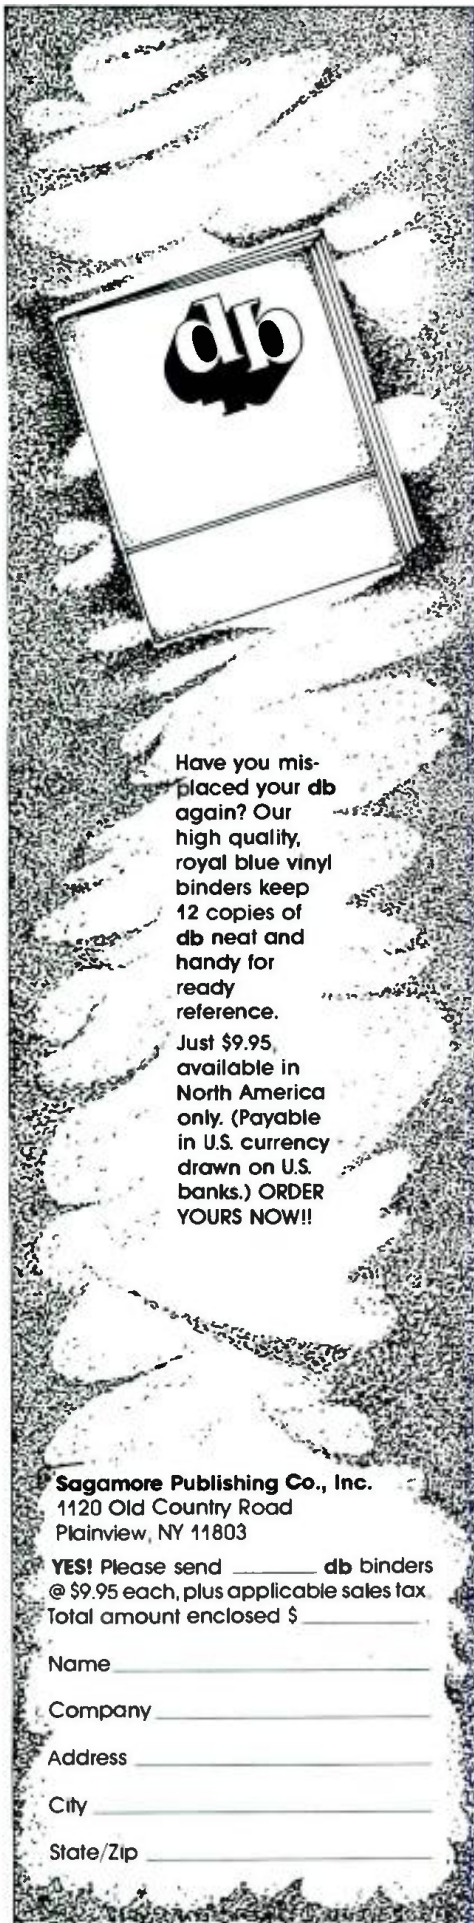

Have you misplaced your db again? Our high quality, royal blue vinyl binders keep 12 copies of db neat and handy for ready reference.

Just \$9.95 available in North America only. (Payable in U.S. currency drawn on U.S. banks.) ORDER YOURS NOW!!

Sagamore Publishing Co., Inc.
1120 Old Country Road
Plainview, NY 11803

YES! Please send _____ db binders @ \$9.95 each, plus applicable sales tax. Total amount enclosed \$ _____

Name _____

Company _____

Address _____

City _____

State/Zip _____

NEUMANN U-87, U-47, four each. Used once. In warranty. \$849, \$829. Call John (512) 690-8187.

AMPEX REEL TO REEL/CASSETTE TAPE. Grandmaster/High Performance. Pro Stereo/Mono Duplication. Volume Wholesale Pricing. MSC "The Cassette Works," 806 W. 7th, Amarillo, TX 79101. (806) 373-8473.

SENSURROUND LOW FREQUENCY ENCLOSURES with 18" CER-VEG 30F watt die-cast 96 oz. magnet driver. \$195.00. Empirical Sound, 1234 East 26th Street, Cleveland, OH 44114. (216) 241-0668.

USED RECORDING equipment for sale. Dan (415) 441-8934.

Electro-Voice Professional Microphones—In stock, same day shipment, low prices. E-V catalog \$1.00 for postage. Altean Horizons Co., 861 South Ave., Plainfield, NJ 07062. (201) 561-8123 until 9:30 p.m.

FOR SALE: Scully "The Lathe" Disc Cutting System w/Ortofon "Blue" Head, Custom Amps, Ikegami Camera & Monitor, Nikon Stylus Inspection Scope. All for \$39,500 US\$. Call Richard Lee at Criteria (305) 947-5611.

"KNOW HOW YOUR SPEAKERS WILL SOUND BEFORE YOU BUILD!" New program gives you response and more on any Commodore home computer—\$19.95 —Audio Soft, 90 Robie Ave., Buffalo, NY 14214.

TECHNICS TURNTABLES IN STOCK! AKG. Neumann. UREI. Orban Eventide. dbx. Lexicon. Best pro-audio equipment. Lowest prices. IMMEDIATE DELIVERY. UAR Professional Systems. (512) 690-8888.

MCI JH-500 Console, Allison automation, JH-16 multitrack recorder with 24 track heads. Very reasonable price. Contact: Gregory King (305) 425-1001 (Florida).

WANTED

WANTED: TRANSCRIPTION discs, any size, speed. Radio shows, music. P.O. Box 724-db, Redmond, WA 98052.

SERVICES

MAGNETIC HEAD relapping—24 hour service. Replacement heads for professional recorders IEM, 350 N. Eric Drive, Palatine, IL 60067. (312) 358-4622.

ACOUSTIC CONSULTATION—Specializing in studios, control rooms, discos. Qualified personnel, reasonable rates. Acoustilog. Bruel & Kjaer. HP, Tektronix. I've equipment calibrated on premises. Reverberation timer and RTA rentals. Acoustilog, 19 Mercer Street, New York, NY 10013. (212) 925-1365.

EMPLOYMENT

MANAGER TELECOMMUNICATIONS CENTER—UNIVERSITY OF TEXAS AT AUSTIN. Immediate vacancy for a registered professional engineer with a bachelor's degree in electrical engineering. Must have 7 years experience in performing technical maintenance activities, including 2 years at a supervisory level. Would prefer 8 years experience with added force work related specifically to broadcast, cable, satellite and computer technology. Job duties are to supervise and perform maintenance activities for 100kw FM broadcast station with major audio production facilities; high speed audio open-reel and cassette duplication facilities; satellite R/T terminal facilities, microwave and cable facilities. Also includes equipment installation, parts purchasing and other related duties as required. Salary is commensurate with qualifications. To apply, a resume must be received by Dec. 1, 1983. Contact William S. Giorda, Center for Telecommunication Services, University of Texas at Austin, Austin, TX 78712. An equal opportunity affirmative action employer.

MOVING?

Keep db coming without interruption!

Send in your new address promptly.

Enclose your old db mailing label, too.

Write to:

Eloise Beach, Circ. Mgr.
db Magazine
1120 Old Country Rd.
Plainview, N.Y. 11803

People, Places

• **Bernie Mann**, president of **Mann Media** (High Point, NC), was elected president of the **National Radio Broadcasters Association** October 2nd. Mann replaces **Sis Kaplan**, president of **WAYS/WROQ** Radio (Charlotte, NC), who had been president of NRBA for the past four years. Mann was elected unanimously by the 37 Board of Directors of NRBA at the recent radio convention in New Orleans. Bernie Mann has been on the Executive Committee as VP/East of the NRBA since 1979. He's also been elected Regional Director of NRBA for North and South Carolina since 1976. He owns radio stations **WGLD/WOKX** (High Point, NC) and **WKIK/WYYD** (Raleigh, NC). Mann has also been owner of **KALO/WEZQ** (Little Rock, AR) and General Manager/VP of **WROV** (Roanoke, VA) and **WAIR/WGPI** (Winston-Salem, NC). Before then, he worked as radio sales manager of **WAKE** (Atlanta), **WADO** (New York City) and **WTRY** (Troy, NY).

• **Hans D. Batschelet**, president of **Studer Revox America**, has announced the appointment of **Nancy M. Byers** as Eastern Regional Sales engineer and **Nick Balsamo** as Northeastern Regional manager. Working out of Studer's New York City office. Byers and Balsamo will assume primary responsibility for sales and service of Studer professional products throughout the Northeast, from Maine to Virginia. Ms. Byers comes to Studer from **CBS Recording Studios** in New York, where she served for 2½ years as a Staff Recording Engineer.

Before assuming his current post with Studer, **Nick Balsamo** served as National Sales manager for **Ikegami Electronics**. Balsamo began his career in audio/video technologies with a six year stint as a design engineer for **Harman Kardon**. Following two years with an engineering consulting firm, **Audio Dynamics Corporation**, Balsamo opened his own audio/video production facility, **Echo Sound Stu-**

dios. In 1974, after several years of consulting for **API**, Balsamo sold his interest in **Echo** and joined **API** full-time as manager of the Broadcast Products Division. From 1978 to 1982 he worked as an independent audio/video facilities design consultant. Balsamo is a member of **SMPTE**, **IEEE**, and the **AES**.

• **Dym/SR&A, Inc.**, a new agency providing public relations, promotion and marketing support services for high technology and electronics companies, has been established by **Fran Dym** and **Sumner Rider & Associates, Inc.** In addition to offering a full range of communications services to the trade, technical and consumer media and business press for companies in the audio, video, computer, telecommunications and electronic home security industries, Dym/SR&A will provide merchandising and promotion programs for such firms in conjunction with other clients in the shelter industry. **Fran Dym**, president of the new agency, was former senior vice president and Electronics/Technology Account Group head at **Daniel S. Roher, Inc.**, for such clients as **American Bell**, **Bang & Olufsen**, **BSR Canada, Ltd.**, **dbx, Inc.**, **Studer Revox America** and **Yamaha Electronics Co.** Headquarters of Dym/SR&A, Inc., will be at 355 Lexington Ave., New York, NY 10017.

• **The Time Capsule Brokerage**, a unique recording studio time brokerage and production coordination service, has begun its New York-based operations with a list of over 40 first-class studios and a client roster of over 200 repeat customers. Studio facilities and engineering personnel are available in and out of New York for a wide range of hourly or block rates. Services available include studio time bookings, instrument rental arrangements, engineer and musician contracting and

budgetary consultation. Plans are in the works for expanding into A&R consultation services and other related areas. Typically, a prospective studio time customer calls the service to arrange for a booking. The client is then asked a series of questions concerning scheduling, budgetary, personnel, location, space, technical and musical requirements. **Time Capsule** then compiles a selection of facilities, personnel, scheduling and price that meet the stated requirements. After the client makes the appropriate choices, the brokerage takes over and coordinates all session-related activities.

• **Westrax Recording Studio**, located at 484 West 43rd Street, New York City, recently upgraded its 8 track facilities to 16 track. The new equipment includes a **Sound Workshop Series 30** board, **Tascam 85-16B** 16 track with dbx Noise Reduction, **Lexicon PCM-42** and a **Neumann U-87** microphone. All equipment was purchased from **Martin Audio**, New York City. 2 and 8 track services continue to be available at Westrax. Recent additions to the studio include an **OBXA** Oberheim synthesizer and **LinnDrum** machine.

• **Peter Jensen** has been promoted to Midwest Regional sales supervisor for the Magnetic Tape Division of **Agfa-Gevaert, Inc.**, Teterboro, New Jersey. He will be based in the Oak Brook, Illinois Marketing and Training Center. Jensen, who is a member of the **Audio Engineering Society**, has been with **Agfa-Gevaert** for five and a half years. He was previously employed as Production Engineering manager with **International Audio, Inc.**

• **Digital Entertainment Corporation** (DEC) is pleased to announce the first major North American studio complex to purchase a complete digital audio

recording and editing system. **Lion Share Recording Studios** of Hollywood has just signed an agreement with DEC to purchase a **Mitsubishi Electric Model X-800** 32 channel digital audio recorder, two X-80 2 channel master recorders and the XE-1 digital audio electronic editing system. The multitrack and 2 track machines were scheduled for delivery around September 1st, with the XE-1 electronic editor to be delivered in November. Total contract value is in excess of \$270,000. This major digital audio studio recording package is the first of any kind to be installed at a major studio. Lion Share will be in a unique position to supply first generation copies of master recordings for both analog and digital record and cassette mass production facilities. Lion Share Recording Studios is owned by **Kenny Rogers** and caters to many of the top recording artists in the world.

- **3M** announced that it has sold the service support capabilities and spare parts inventory for its professional analog audio recorders to **Electro-Technology Corporation**, Menlo Park, California. The sale includes a licensing agreement to manufacture spare parts to repair or rebuild the recorders which were last manufactured in 1979 by the former Mincom Products Divi-

sion of 3M. According to **Art Cuscaden**, technical service supervisor, Broadcast and Related Products Division, the agreement includes all existing spare parts, engineering data, vendor information and test and manufacturing fixtures needed to provide repair services or parts to current owners of the equipment. In addition, the agreement provides for the training of **Electro-Technology** personnel in the use of the fixtures and equipment.

- **BTX** has appointed **James R. Lucas** manager of Western Area Sales, according to **Michael L. Sipsey**, vice president. Lucas will be responsible for all BTX sales and support activities in Arizona, California, Nevada, Oregon and Washington. Lucas has over eight years experience in the audio, video and film industries. He was most recently operating manager of **Command Video** in Los Angeles.

- **Sony Professional Audio Products** has named **Jeff Evans** and **Ernie De Los Santos** sales managers for the Western and Central regions, respectively. The announcement was made by **George Currie**, vice president and general manager. Each will have

responsibility for **MCI/Sony** professional recording equipment, **Sony** wireless microphone systems and other **Sony** professional audio products. The appointments are part of an expansion of **Sony's** professional audio regional sales force designed to provide improved service and sales distribution to the recording, broadcast and sound reinforcement industries. Prior to joining **Sony**, **Evans** was a sales engineer for **Sound Genesis**, a San Francisco professional audio dealership. He has also served as project engineer for **Dolby Laboratories**. **De Los Santos** joined **Sony Corporation of America** in 1982 as Federal government marketing manager for **Sony Video Communications**. **De Los Santos** was previously a sales engineer for **Commercial Audio/Video Inc.**, a Houston sound reinforcement company.

- **Arthur C. Keller**, retired **Bell Labs** engineer who pioneered high fidelity and stereophonic recording techniques, died on August 25th at Lawrence Hospital in Bronxville, New York. He was 82.

Mr. Keller's invention of a "moving-coil" playback stylus made possible the first hi-fi records. His work with sound engineer **Irad S. Rafuse** led to the first single-groove stereophonic recordings, and their proposal for recording two sound channels onto a master disc became the standard stereophonic technique.

In 1931-32 Mr. Keller made the first known stereophonic and high-fidelity recordings of orchestral music during performances and rehearsals of the **Philadelphia Orchestra**, conducted by **Leopold Stokowski**. The recordings were part of a **Bell Labs** project aimed at improving the quality of recorded and amplified sound transmitted over the telephone network. In 1979 Mr. Keller identified and classified the **Stokowski** discs from among some 6,000 early recordings stored by **Bell Labs** at Murray Hill, New Jersey, and the following year **Bell Labs** presented a collection of the historic recordings to the nation's major record archives.

Mr. Keller was a Fellow of the **Acoustical Society of America** and the **Institute of Electrical and Electronic Engineers**, and a member of the **American Physical Society** and the **Yale Engineering Association**.

DUNCAN 50' REPLACES P & G 100/1500

**SOLVES FADEK
BLUES IN A HURRY.**

You won't have to wait. Single or Dual Channel, with cable/plug interface connector or wires ready for hook-up.

Quality. Reliability. Call for the specs or the replacement itself.

AVAILABLE FAST, HERE IN U.S.
 COMPLETELY INTERCHANGEABLE
 LOW COST

SISTRON DUNCAN ELECTRONICS
DONNER DIVISION
A THORN EMI company
2865 Fairview Rd., Costa Mesa, CA 92626 (714) 545-8261 TWX 910-595-1128

Audio Equipment Delivered to School of Audio Arts

• The School of Audio Arts, the most recent addition to the expanding and recently relocated Center for the Media Arts, has accepted the final shipment of a large audio equipment package. The package consisted of an Otari MTR-90 Series II, 24 track, Otari MTR-10 2 track and 4 track recorders, 17 Otari MX5050B's, an Otari MX5050 MKIII-4, an Eventide SP2016 digital processor, JBL Bi-radial monitors, Ramsa 8118 and 8112 mixers, and a host of amplifiers, microphones and accessories.

THE HIGH C's TEST

• The final production of the Greater Miami Opera's 1982-83 season, Verdi's opera, *The Masked Ball*, offered an opportunity to evaluate B&K's new microphones under the demanding and always fickle conditions of a live remote recording. John Monforte accompanied the microphones to the opera house where engineers Ken Pohlmann and Carlos Santos integrated them into their microphone array. A pair of coincident cardioids were removed and replaced with B&K spaced omnis, while EV shotgun microphones remained aimed into the deep stage. After several rehearsals and subsequent adjustments, three performances were taped, to be edited into a broadcast version for National Public Radio.

Pohlmann reported that the B&K omnis produced a clean and open sound, and monaural compatibility remained acceptable. He felt that the large diameter capsules were especially successful in providing a high output, low noise signal in this application. Following the final performance, tenor Luciano Pavarotti immortalized the box for the B&K microphones which had just recorded his voice by signing his name alongside the comment: "Thanks for a masterful recording."

db

CD WATCH



• "The Compact Disc player is the fastest-selling new product in the history of audio technology," according to John Briesch, vice president, audio sales and marketing, Sony Consumer Products Co., and a member of the Compact Disc Group (CDG) steering committee.

Briesch made his observation during a CDG presentation sponsored by the Los Angeles Chapter of the National Academy of Recording Arts and Sciences. The program, which introduced digital audio technology and Compact Disc players and recordings to more than 200 recording industry attendees, was run by the CDG, a non-profit association of 29 manufacturers of Compact Disc hardware and software supported by the Recording Industry Association of America (RIAA) and the National Association of Recording Merchandisers (NARM).

Briesch also noted that 18 manufacturers are or soon will be selling 22 CD player models in the U.S., including both Sony and Denon, who also offer professional units for radio station use. In addition, Emiel Petrone, a leading CDG spokesman and vice president marketing/Compact Disc coordinator—U.S.A., PolyGram Records Inc., noted that, "by the end of this year, 260 classical, 177 pop, and 23 jazz titles will be on the U.S. market."

In related news, Nippon Columbia, Tokyo, Japan announced through its U.S. marketing arm, Denon America Inc. (DAI), the signing of a manufacturing agreement with RCA for the production of 1.5 million RCA Compact Discs over the next two years. The titles will be drawn from RCA's classical repertoire.

Q: The Department of Defense picked what sound effects library as the one to use in all their radio stations around the world?

The Production EFX Library, 5 stereo albums arranged by categories. Shouldn't you give a listen?

A:

Stereo Sound Effects

PRODUCTION EFX LIBRARY
2325 Girard Ave. S.
Minneapolis, MN 55405

Sounds Like Mud (Island)

• The sound of music is better than ever at **Mud Island**, a Mississippi river theme park in Memphis, following a recent overhaul of the sound system at the island's 5,000 seat amphitheater.

The new sound package was provided by **Phase Audio, Inc.**, a Memphis-based sound contracting firm, with consultation from acoustician **Stephen Durr** of Nashville.

The purpose of the sound work was to enhance the design of the original system installed prior to Mud Island's opening more than a year ago. The original amplifiers and mixers were kept intact, but a major portion of the system, including speakers, horn drivers and equalizers, were replaced. The package also includes a new on-stage monitoring system.

The new speaker system, featuring a central cluster arrangement, includes a combination of **JBL** and **Gauss** speakers with a specialized crossover design incorporated into the system to achieve a flatter response. Phase Audio also installed **White** equalization for the main speakers and on-stage monitors.




The new amphitheater sound system at Mud Island, featuring speakers in a central cluster arrangement above the stage.

Ahoy There, Sailor



Now comes Miller time.

• From the "how I spent my summer vacation" file. **Lexicon's** chief executive officer, **Ron Noonan**, not only runs one of the world's leading professional audio and broadcast equipment companies, he also has joined a select group of captains who have won the coveted **Marion (USA to Bermuda)** cruising race. Sailing in G class with his daughter, Michelle, son, Rick, and crew, Noonan's **Bristol 40 sloop Wildflower** won overall first place competing against 134 yachts in the 645 nautical mile race. Corrected time was 3 days, 17 hours, 47 minutes and 18 seconds.

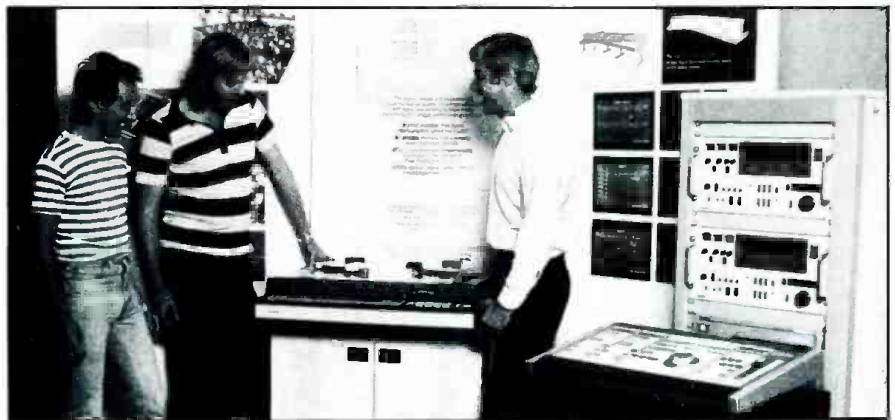

Rick Wakeman (center), currently working on the music score for SHE, pictured with studio engineers Peter Wandless (left) and Dick Lewzey (right) and the new Sony 3324 and 1610 digital recorders.

CTS Goes Digital

• **CTS Studios Limited** have completed the first stage of their digital overhaul with the acquisition of the **Sony PCM 3324** digital 24 track recorder and the **Sony PCM 1610** digital stereo recording and editing system at their **Wembley studios**. CTS is the first U.K. studio to offer the Sony 24

track digital state-of-the-art recorder permanently in-house. The second stage of the digital overhaul will take place in early 1984 when the **Neve DSP** all-digital console is installed in **CTS Studio 1**. CTS will then have the world's first comprehensive all-digital studio.

The New UREI Power Amplifiers

The UREI power amplifiers are designed to extend UREI quality from our low level signal processing all the way through to our exclusive Time Align™ studio monitors.

Careful evaluation of competitive power amplifiers indicates that while in some cases adequate reliability has been

achieved, audible performance is often marginal.

The UREI 6000 Series amplifiers offer the knowledgeable professional the reliability he demands *and* the sound quality he deserves.

Exceptionally large power supplies and exceedingly high speed, high current circuitry combine to produce low-end punch and high-end sparkle which is unexcelled in professional power amps. Moderate use of negative feedback results in fast recovery from transient overloads and avoids excessive high order harmonic distortion when the amplifier is driven into clipping.

The Model 6500 Listening Amplifier

Two totally independent plug-in channels, removable from the front panel,

each with its own power supply and continuously variable cooling fan. Exclusive Conductor Compensation™ corrects for wire loss and transducer related load anomalies, resulting in absolutely accurate waveforms at the speaker terminals. 275 Watts per channel into 8 ohms, 600 Watts per channel into 2 ohms. Standard rack mount, 7" high.

The Model 6300 Dual Channel Power Amplifier

225 Watts per channel into 8 ohms, 380 Watts per channel into 4 ohms. 5¼" rack space!

The Model 6250 Dual Channel Power Amplifier

150 Watts per channel into 8 ohms, 200 Watts per channel into 4 ohms. 3½" rack space!


The Model 6150 Dual Channel Power Amplifier

80 Watts per channel into 8 ohms, 80 Watts per channel into 4 ohms. 1¾" rack space!!

Audition the UREI Power Amplifiers at your professional sound dealer and discover how good a reliable amplifier can sound.

From One Pro to Another—trust all your toughest signal processing needs to UREI.

Time-Align is a Trademark of E.M. Long Assoc., Oakland, CA. All referenced Trademarks are property of, or licensed by, United Recording Electronics Industries, a URC Company.

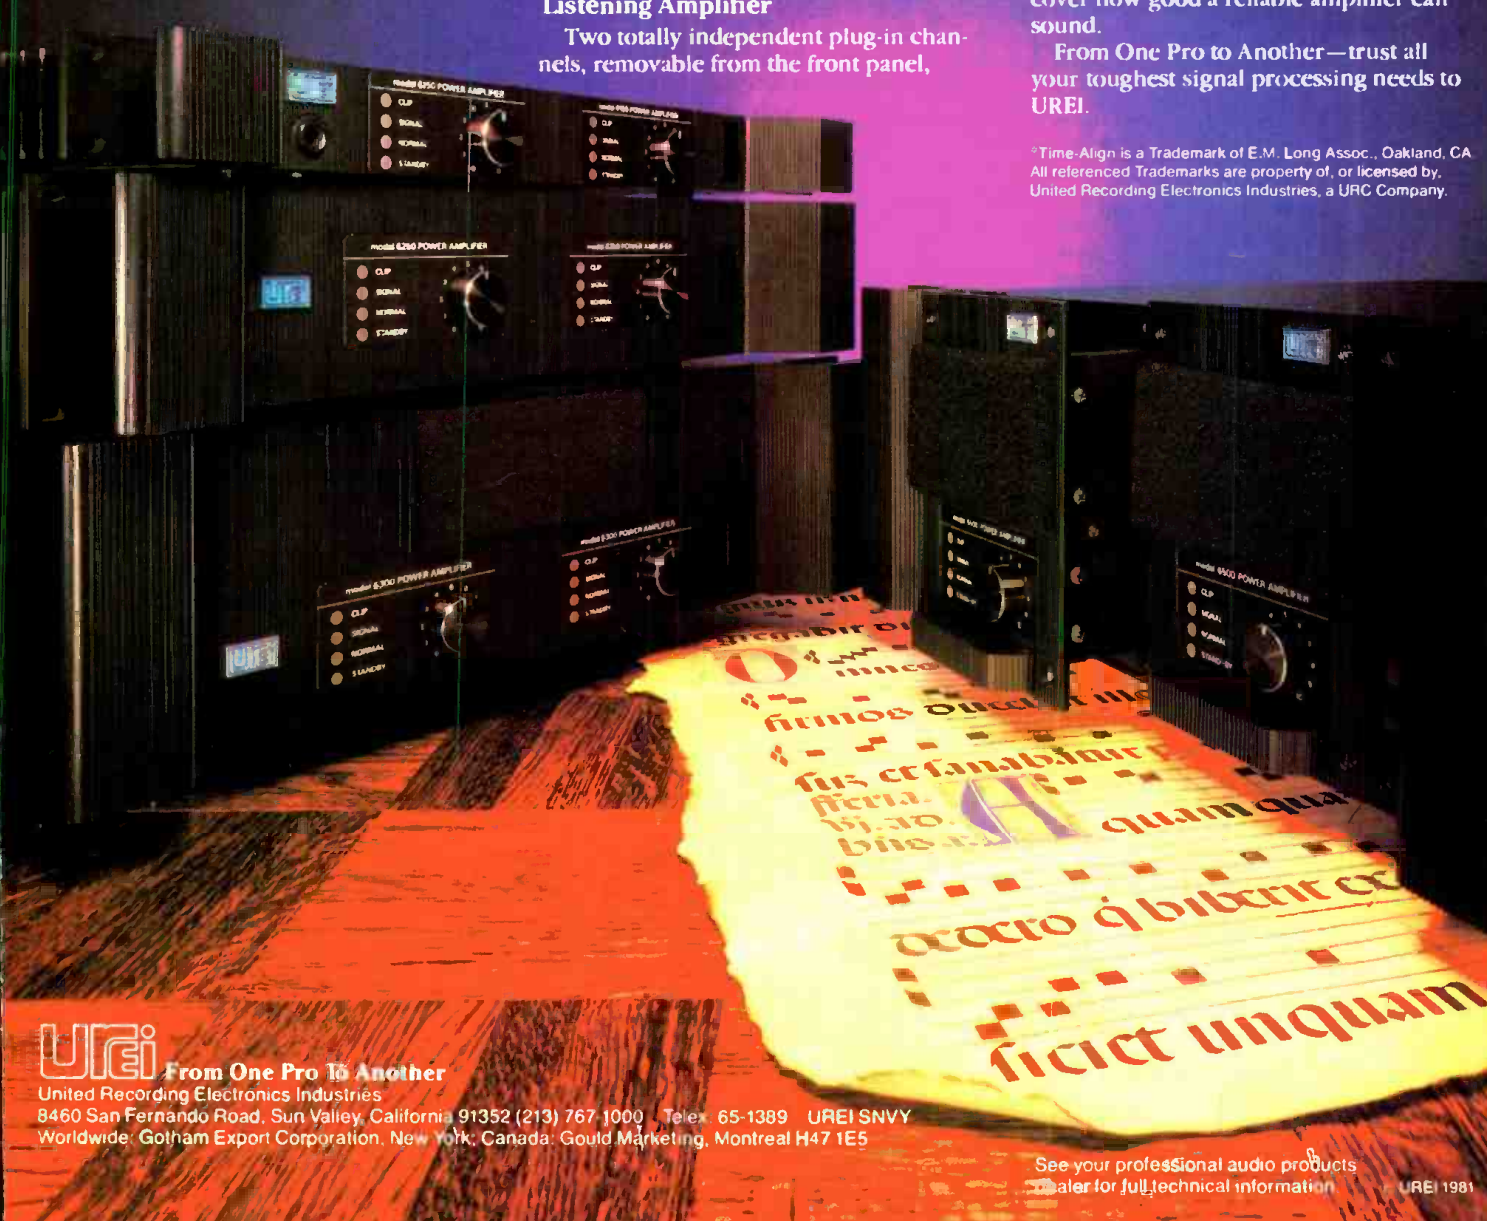

UREI From One Pro To Another
United Recording Electronics Industries
8460 San Fernando Road, Sun Valley, California 91352 (213) 767-1000 Telex: 65-1389 UREI SNVY
Worldwide: Gotham Export Corporation, New York, Canada: Gould Marketing, Montreal H4T 1E5

See your professional audio products dealer for full technical information UREI 1981

How to Build a Better Compact Professional Recorder

Follow this step-by-step guide to build your own rugged, reliable, high-performance professional recorder.

1. For your design team, hire the same engineers responsible for world's premier multi-track recorder, the STUDER A800.
2. Employ meticulous Swiss and German craftsmen for all fabrication and assembly.
3. Use solid aluminum alloy die-castings for transport chassis and headblock.
4. Use the finest Swiss and German machine tools for milling, drilling, and tapping.
5. Use only professional-grade mechanical and electronic components.
6. Make your own audio heads to ensure the highest quality.
7. Apply gold plating to audio switching contacts.
8. Include the following standard features: Balanced and floating + 4 inputs and outputs • Calibrate/uncalibrate switches • Self-sync • Tape dump • Edit mode • Full logic transport control • Servo controlled capstan motor • Front panel input and output mode switching • Universal power supply • Rack mount.
9. Provide the following options: Rugged, steel-legged console • Transport case • Monitor panel • Remote control • Vari-speed control • Balanced mike inputs.
10. Support your finished product with a worldwide parts and service network.

If you can do all of this for under \$2100*—by all means go ahead! (Even Dr. Willi Studer would be proud of you.) But first, we suggest you consult with your Revox Professional Products dealer. He'll provide you with a ready-built PR99...so you can concentrate on building your reputation as an audio professional.

STUDER REVOX

Studer Revox America, Inc. • 1425 Elm Hill Pike • Nashville, TN 37210 • (615) 254-5651

*Manufacturer's suggested list price \$2095.00. Contact dealer for further pricing information.

Circle 12 on Reader Service Card

